
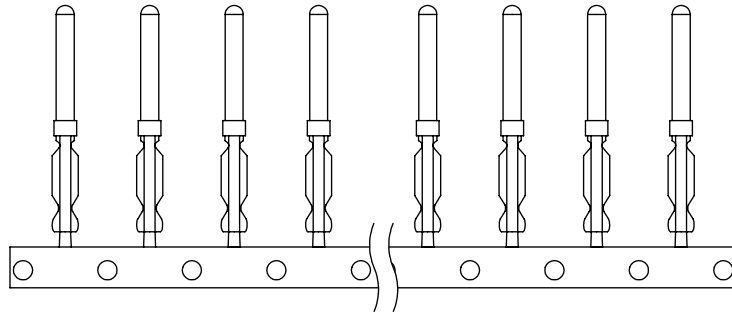


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
A	INITIAL RELEASE	06/18/09	D.GRIFFIN
B	ECN4125: CHANGED 10 PIECE PACKAGING FROM ZIPLOCK STYLE	07/14/09	DFP

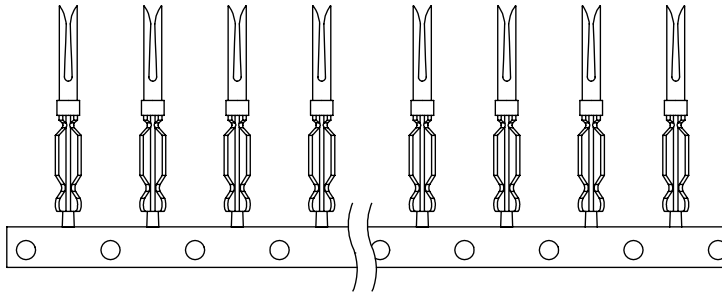

CPM
STANDARD MALE PINS, 24-28 AWG





CPF
STANDARD FEMALE CONTACTS, 24-28 AWG

P/N	GENDER	QUANTITY	GOLD PLATING
CPM10	MALE	10 / STRIP	FLASH
CPF10	FEMALE	10 / STRIP	FLASH
CPM10-30U	MALE	10 / STRIP	30μINCHES
CPF10-30U	FEMALE	10 / STRIP	30μINCHES
CPM100	MALE	100 / STRIP	FLASH
CPF100	FEMALE	100 / STRIP	FLASH
CPM100-30U	MALE	100 / STRIP	30μINCHES
CPF100-30U	FEMALE	100 / STRIP	30μINCHES

NOTE

1. 10 / STRIP CONTACTS ARE PACKAGED IN A POLYBAG
2. 100 / STRIP CONTACTS ARE PACKAGED IN AN APPROPRIATELY SIZED BOX

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2[51] / -0 >60 [1524] ≤ 120 [3048] = +4 / -0 >120 [3048] ≤ 300 [7620] = +6 / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.3 .XX = ±.15	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	DRAWN BY D. PARHAM	06/18/2009		CATEGORY D-SUB		
	CHECKED BY M. MARTINEZ	06/18/2009	PRODUCT DESCRIPTION FEMALE CRIMP CONTACT			
	APPROVED BY S. SMITH	06/18/2009		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
PROJECTION 	SCALE: 2:1		CAD FILE: CPF10.SLDDRW	SHEET 1 OF 1		