

ENERGIZER NO. CR1216




Industry Standard Dimensions

mm (inches)



This Battery has Underwriters Laboratories component Recognition

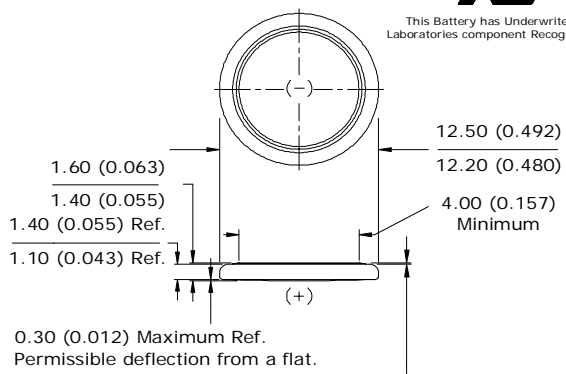


Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains: at 2.85V (mA)	Load (ohms)	Cutoff 2.0V (hours)
Continuous	0.063	45,000	540

Typical Discharge Characteristics

Load: 45,000 ohms - Continuous
Typical Drain @ 2.85V: 0.063 mA

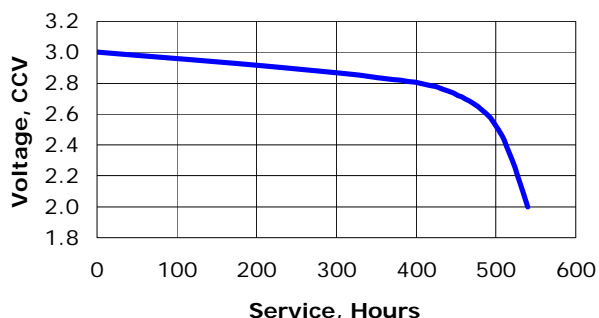


Internal Resistance Characteristics

Pulse Test at 21°C (70°F)

Bkgnd Drain: Continuous
45K ohms
0.063 mA @2.85V

Pulse Drain: 2 seconds X 12 times/day
1K ohms
2.8 mA @2.8V

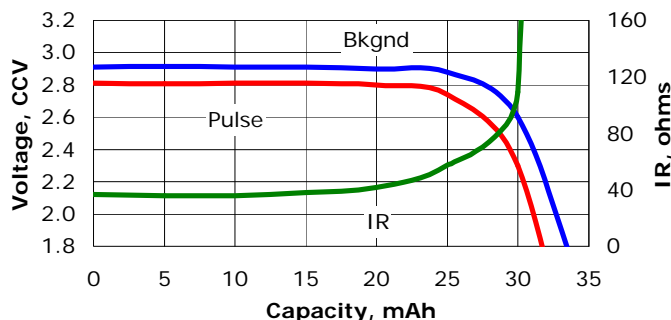

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.