


MALE END VIEW


FEMALE END VIEW

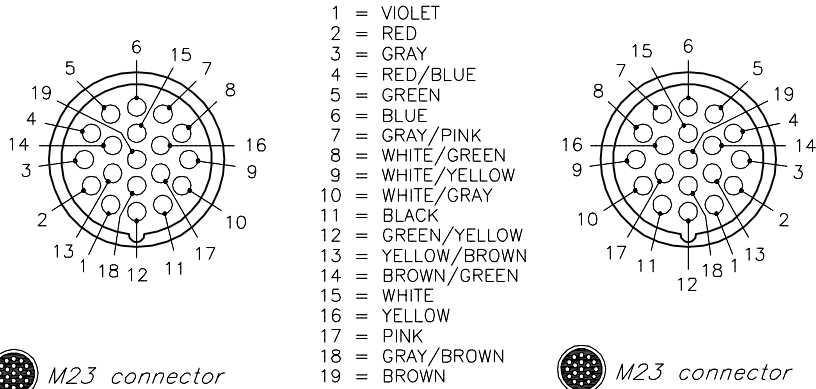

SPECIFICATIONS

| | |
|-------------------------------|---|
| CONTACT CARRIER MATERIAL | NYLON or PBT |
| MOLDED HEAD MATERIAL/COLOR | TPU/BLACK |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT [A] | 7.0 A MAX 18 AWG (TOTAL CURRENT NOT TO EXCEED 84 AMPS) |
| RATED VOLTAGE [V] | 150 V |
| OUTER JACKET MATERIAL/COLOR | TPU/YELLOW |
| CONDUCTOR INSULATION MATERIAL | POLYESTER ELASTOMER |
| NUMBER OF CONDUCTORS [AWG] | 20x18 AWG |
| TEMPERATURE RANGE | -40°C to +90°C (-40°F to +194°F) |
| PROTECTION CLASS | IEC IP67 |

* METERS
+100mm/-0mm OR 4%
(WHICHEVER IS GREATER)
SEE NOTE 1

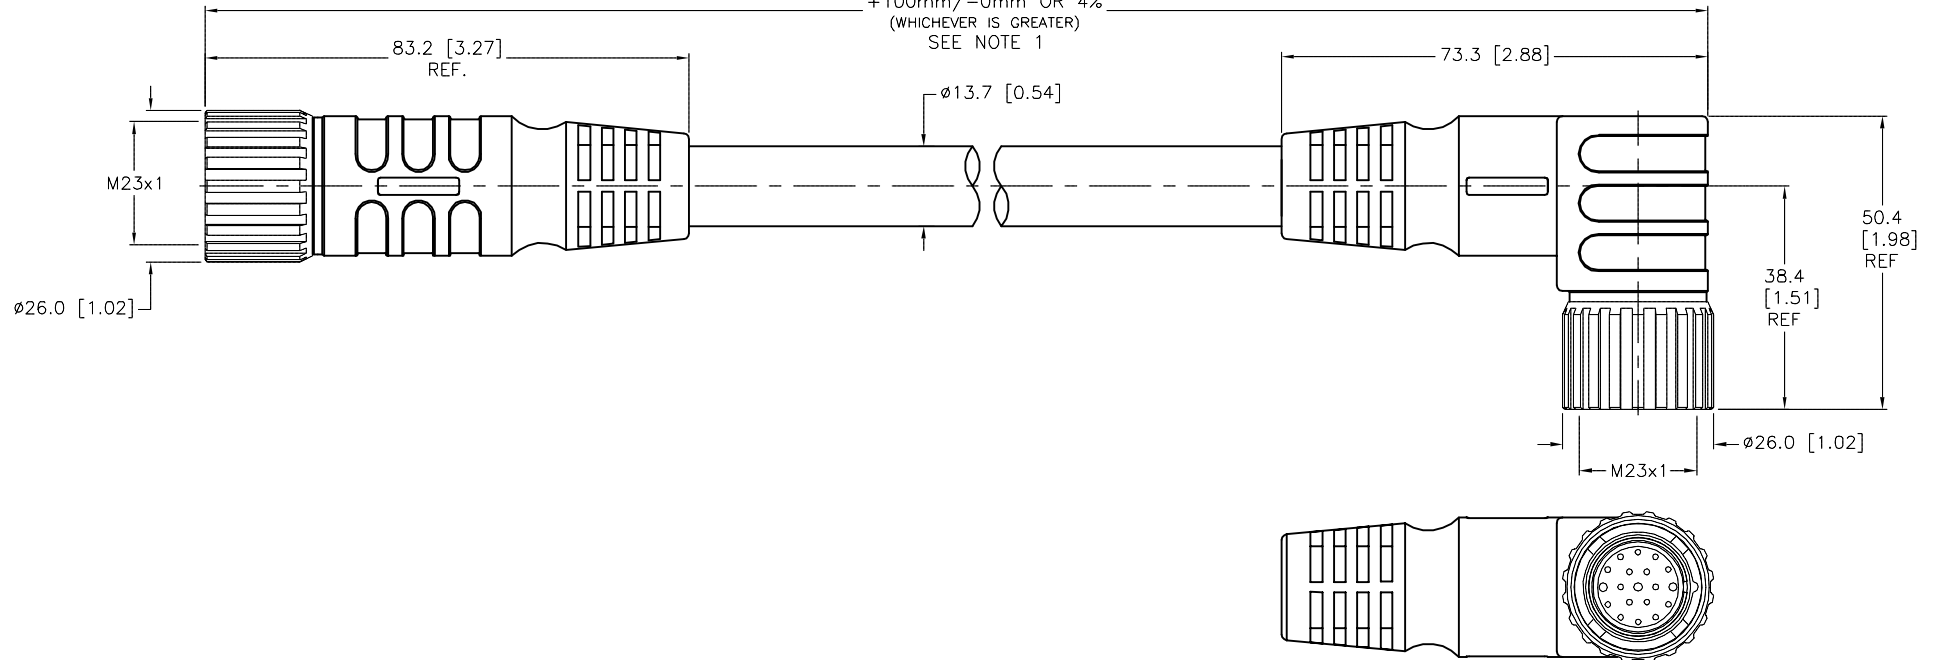

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/CS10462" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU), 18 AWG FLEXLIFE-20 CABLE. STANDARD PINOUT.

| | | | | | |
|---|---|--|------------------------------|---|-----------------|
| RELATED DOCUMENTS 1. 2. 3. 4. | 3RD ANGLE PROJECTION | THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. | | 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com | |
| | MATERIAL SEE SPECIFICATIONS | DRFT RDS APVD | DATE 03/13/07 SCALE 1=1.3 | DESCRIPTION CSM CKWM 19-19-*/CS10462 | |
| FINISH SEE SPECIFICATIONS | ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY | UNIT OF MEASUREMENT MILLIMETER [INCH] | | IDENTIFICATION NO. | REV J |
| J UPDATE CURRENT RATING PER ECO | KMY 11/12/13 | 43999 | DO NOT SCALE THIS DRAWING | | FILE: 777009275 |
| REV DESCRIPTION | BY | DATE | ECO NO. | SHEET 1 OF 1 | |