


**Features:**

- 0201 to 2512 (standard terminations) and 0612 to 1225 (wide terminations) available
- Low resistance, TCR and inductance
- Excellent long-term stability
- High precision current sensing
- High power capability
- RoHS compliant, lead free and halogen free
- Non-standard resistance values available



**Applications:**

- Consumer electronics
- Computer
- Telecom
- Measuring instrument
- Industrial / Power supply
- Battery management system


Electrical Specifications						
Type / Code	Power Rating (watt) @ 70°C	Max Rated Current (amp)	Max Overload (amp)	TCR	Ohmic Range (Ω) and Tolerance	
					0.5%, 1%, 2%, 5%	
CSRT0201	0.2	2	4.47	± 100 ppm/°C	0.05 - 0.098	
				± 50 ppm/°C	0.1 - 10	
CSRT0402	0.25	2.24	5	± 100 ppm/°C	0.05 - 0.098	
				± 50 ppm/°C	0.1 - 10	
CSRT0603	0.4	2.83	6.32	± 100 ppm/°C	0.05 - 0.098	
				± 50 ppm/°C	0.1 - 10	
CSRT0805	0.5	3.58	8	± 150 ppm/°C	0.039 - 0.049	
				± 100 ppm/°C	0.05 - 0.098	
				± 50 ppm/°C	0.1 - 10	
CSRT1206	0.5	7.07	15.81	± 200 ppm/°C	0.01 - 0.038	
				± 150 ppm/°C	0.039 - 0.049	
	1	5.06	11.32	± 100 ppm/°C	0.05 - 0.098	
				± 50 ppm/°C	0.1 - 10	
CSRT1210	1	5.06	11.32	± 150 ppm/°C	0.039 - 0.049	
				± 100 ppm/°C	0.05 - 0.098	
				± 50 ppm/°C	0.1 - 10	
CSRT2010	1.5	3.87	8.66	± 50 ppm/°C	0.1 - 10	
CSRT2512	3	5.48	12.25	± 50 ppm/°C	0.1 - 10	

For non-standard parts, please contact factory.


Electrical Specifications – Wider Termination						
Type / Code	Power Rating (watt) @ 70°C	Max Rated Current (amp)	Max Overload (amp)	TCR	Ohmic Range (Ω) and Tolerance	
					0.5%	1%, 2%, 5%
CSRT0612	1	10	22.36	± 150 ppm/°C	-	0.01 - 0.019
				± 100 ppm/°C	0.1 - 0.5	0.02 - 0.5
CSRT1020	2	14.14	31.62	± 150 ppm/°C	-	0.01 - 0.019
				± 100 ppm/°C	0.1 - 0.5	0.02 - 0.5
CSRT1225	3	17.32	38.73	± 150 ppm/°C	-	0.01 - 0.019
				± 100 ppm/°C	0.1 - 0.5	0.02 - 0.5

For non-standard parts, please contact factory.


**Mechanical Specifications**



Type / Code	L Body Length	W Body Width	H Body Height	l <sub>1</sub> Top Termination	l <sub>2</sub> Bottom Termination	Unit
CSRT0201	0.024 ± 0.001	0.012 ± 0.001	0.010 ± 0.002	0.006 ± 0.002	0.006 ± 0.002	inches
	0.60 ± 0.03	0.30 ± 0.03	0.26 ± 0.05	0.15 ± 0.05	0.15 ± 0.05	mm
CSRT0402	0.039 ± 0.004	0.020 ± 0.002	0.014 ± 0.002	0.008 ± 0.004	0.010 ± 0.004	inches
	1.00 ± 0.10	0.50 ± 0.05	0.35 ± 0.05	0.20 ± 0.10	0.25 ± 0.10	mm
CSRT0603	0.063 ± 0.004	0.031 ± 0.004	0.018 ± 0.004	0.010 ± 0.006	0.012 ± 0.006	inches
	1.60 ± 0.10	0.80 ± 0.10	0.45 ± 0.10	0.25 ± 0.15	0.30 ± 0.15	mm
CSRT0805	0.079 ± 0.004	0.049 ± 0.004	0.022 ± 0.004	0.014 ± 0.008	0.016 ± 0.008	inches
	2.00 ± 0.10	1.25 ± 0.10	0.55 ± 0.10	0.35 ± 0.20	0.40 ± 0.20	mm
CSRT1206 0.05Ω - 10Ω	0.122 ± 0.004	0.063 ± 0.004	0.022 ± 0.004	0.016 ± 0.008	0.018 ± 0.008	inches
	3.10 ± 0.10	1.60 ± 0.10	0.55 ± 0.10	0.40 ± 0.20	0.45 ± 0.20	mm
CSRT1210	0.122 ± 0.004	0.098 ± 0.006	0.022 ± 0.004	0.020 ± 0.008	0.020 ± 0.008	inches
	3.10 ± 0.10	2.50 ± 0.15	0.55 ± 0.10	0.50 ± 0.20	0.50 ± 0.20	mm
CSRT2010	0.197 ± 0.008	0.098 ± 0.006	0.022 ± 0.004	0.024 ± 0.010	0.024 ± 0.010	inches
	5.00 ± 0.20	2.50 ± 0.15	0.55 ± 0.10	0.60 ± 0.25	0.60 ± 0.25	mm
CSRT2512	0.248 ± 0.008	0.126 ± 0.008	0.028 ± 0.006	0.026 ± 0.010	0.026 ± 0.010	inches
	6.30 ± 0.20	3.20 ± 0.20	0.70 ± 0.15	0.65 ± 0.25	0.65 ± 0.25	mm

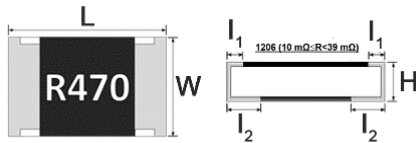


Type / Code	L Body Length	W Body Width	H Body Height	l <sub>1</sub> Top Termination	l <sub>2</sub> Bottom Termination	Unit
CSRT1206 0.01Ω - 0.038Ω	0.130 ± 0.008	0.067 ± 0.008	0.026 ± 0.008	0.008 ± 0.006	0.027 ± 0.008	inches
	3.30 ± 0.20	1.70 ± 0.20	0.65 ± 0.20	0.20 ± 0.15	0.68 ± 0.20	mm

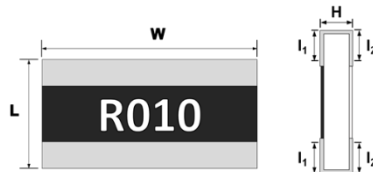

Type / Code	L Body Length	W Body Width	H Body Height	l <sub>1</sub> Top Termination	l <sub>2</sub> Bottom Termination	Unit
CSRT0612	0.063 ± 0.006	0.126 ± 0.008	0.022 ± 0.006	0.012 ± 0.008	0.020 ± 0.008	inches
	1.60 ± 0.15	3.20 ± 0.20	0.55 ± 0.15	0.30 ± 0.20	0.50 ± 0.20	mm
CSRT1020	0.098 ± 0.006	0.197 ± 0.006	0.022 ± 0.006	0.016 ± 0.008	0.020 ± 0.008	inches
	2.50 ± 0.15	5.00 ± 0.15	0.55 ± 0.15	0.40 ± 0.20	0.50 ± 0.20	mm
CSRT1225	0.126 ± 0.008	0.248 ± 0.008	0.022 ± 0.006	0.024 ± 0.010	0.031 ± 0.010	inches
	3.20 ± 0.20	6.30 ± 0.20	0.55 ± 0.15	0.60 ± 0.25	0.80 ± 0.25	mm


**Power Derating Curve:**

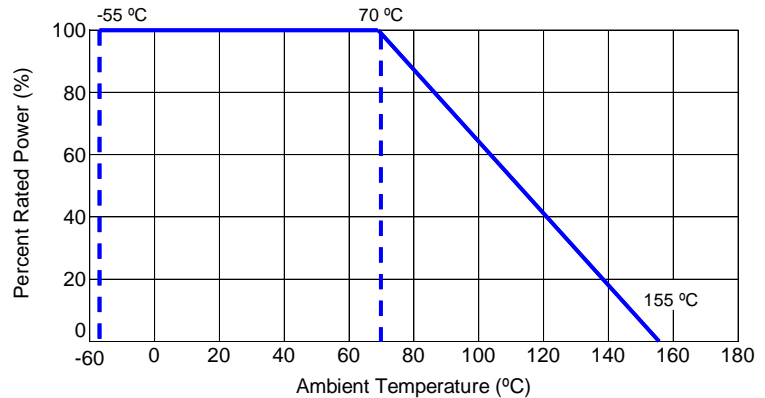


Performance Characteristics			
Test Item	Test Method	Test Condition	Test Limits
Temperature Coefficient of Resistance (TCR)	JIS C-5201-1 4.8 IEC-60115-1 4.8	TCR +125 °C, 25 °C is the reference temperature	Refer to Electrical Specifications table.
Short Time Overload	JIS C-5201-1 4.13 IEC-60115-1 4.13	Standard Power: 6.25 times rated power whichever is less for 5 seconds High Power (2X / 4X) and wide terminal type: 5 times rated power whichever is less for 5 seconds	± (1% + 0.001 Ω)
Insulation Resistance	JIS C-5201-1 4.8 IEC-60115-1 4.8	100 VDC for 1 minute	≥ 10 G Ω
Dielectric Withstanding Voltage	JIS C-5201-1 4.7	0805, 0612 and above applied 500 VAC, 1 minute 0201, 0402, 0603 applied 300 VAC, 1 minute	No short or burned on the appearance.
Core Body Strength	JIS C-5201-1 4.15	Central part pressurizing force: 10 N, 10 seconds	No breakage.
Solderability	JIS C-5201-1 4.17 IEC-60115-1 4.17	245 ± 5 °C for 3 ± 0.5 seconds	>95% coverage. No visual damage.
Resistance to Soldering Heat	JIS C-5201-1 4.18 IEC-60115-1 4.18	260 ± 5 °C for 10 seconds	± (1% + 0.001 Ω) No visual damage
Leaching	JIS C5201-1 4.18 IEC-60068-2-58 8.2.1	260 ± 5 °C for 30 seconds	>95% coverage. No visual damage.
Rapid Change of Temperature	JIS C-5201-1 4.19 IEC-60115-1 4.19	-55 °C to +155 °C, 300 cycles	± (1% + 0.001 Ω) No visual damage
Damp Heat with Load	JIS C-5201-1 4.24 IEC-60115-1 4.24	40 ± 2 °C, 90 – 95% R.H., rated power or max. working current whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hours "OFF"	± (1% + 0.001 Ω)
Load Life (Endurance)	JIS C-5201-1 4.25 IEC-60115-1 4.25.1	70 ± 2 °C, rated power or max. working current whichever is less for 1000 hours with 1.5 hours "ON" and 0.5 hours "OFF"	± (1% + 0.001 Ω)
High Temperature Exposure	JIS C-5201-1 4.25 IEC 60068-2-2	155 ± 5 °C for 1000 + 48 / - 0 hours	± (1% + 0.001 Ω)
Resistance to Solvent	JIS C-5201-1 clause 4.29	The tested resistor be immersed into isopropyl alcohol of 20 – 25 °C for 60 seconds. Then the resistor is left in room for 48 hours	± (1% + 0.001 Ω) No visual damage
Terminal Strength	JIS C-5201-1 4.32 AEC Q200-006	Pressurizing force for 10 seconds. 0201, 0402, 0603: 8 N; 0805, 0612 and above: 17.7 N	No breakage.
Bending Strength	JIS C-5201-1 4.33 IEC-60115-1 4.33	Bending once for 5 seconds. D: 0201, 0402, 0603, 0805 = 5 mm 1206, 1210, 0612 = 3 mm 2010, 2512, 1020, 1225 = 2 mm	± (1% + 0.001 Ω) No visual damage

Operating Temperature Range: -55 °C to +155 °C

**Soldering Profiles**

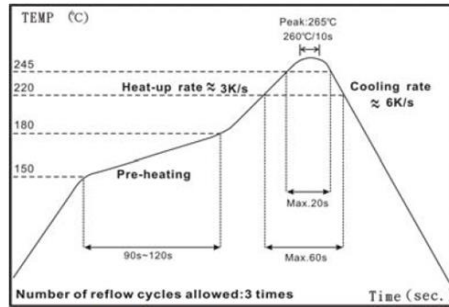

IR Reflow Soldering

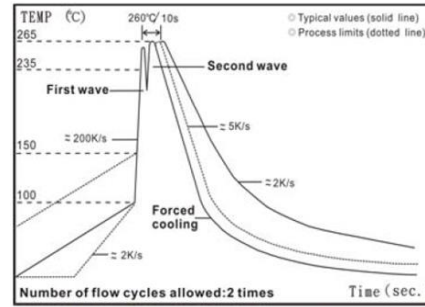

Wave Soldering (Flow Soldering)


Rework temperature (hot air equipment): 350 °C, 3 ~ 5 seconds

Recommended reflow methods:

IR, vapor phase oven, hot air oven


If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

**Recommended Pad Layout**




Type / Code	A	B	C	Unit
CSRT0201	0.010	0.033	0.014	inches
	0.25	0.85	0.35	mm
CSRT0402	0.020	0.063	0.028	inches
	0.50	1.60	0.70	mm
CSRT0603	0.031	0.094	0.039	inches
	0.80	2.40	1.00	mm
CSRT0805	0.051	0.114	0.057	inches
	1.30	2.90	1.45	mm
CSRT1206	0.087	0.165	0.071	inches
	2.20	4.20	1.80	mm
CSRT1206 (0.01 Ω - 0.038 Ω)	0.047	0.189	0.072	inches
	1.20	4.80	1.84	mm
CSRT1210	0.079	0.173	0.106	inches
	2.00	4.40	2.70	mm
CSRT2010	0.150	0.260	0.106	inches
	3.80	6.60	2.70	mm
CSRT2512	0.193	0.319	0.134	inches
	4.90	8.10	3.40	mm
CSRT0612	0.020	0.102	0.126	inches
	0.50	2.60	3.20	mm
CSRT1020	0.039	0.159	0.217	inches
	1.00	4.05	5.50	mm
CSRT1225	0.047	0.205	0.276	inches
	1.20	5.20	7.00	mm

**Reel Specifications**



Type / Code	A	B	C	D	W	M	Unit
CSRT0201	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
CSRT0402	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
CSRT0603	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
CSRT0805	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
CSRT1206	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
CSRT1210	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
CSRT2010	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
CSRT2512	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.630 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	16.00 ± 2.00	178.00 ± 2.00	mm
CSRT0612	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
CSRT1020	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.453 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	11.50 ± 2.00	178.00 ± 2.00	mm
CSRT1225	0.079 ± 0.020	0.531 ± 0.039	0.827 ± 0.039	2.362 ± 0.039	0.630 ± 0.079	7.008 ± 0.079	inches
	2.00 ± 0.50	13.50 ± 1.00	21.00 ± 1.00	60.00 ± 1.00	16.00 ± 2.00	178.00 ± 2.00	mm

**Packaging Specifications - Paper Tape**

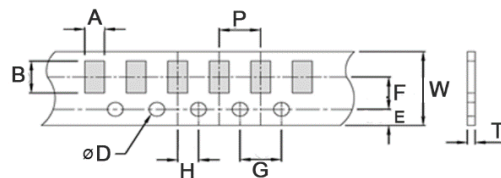


Type / Code	A	B	W	E	F	Unit
CSRT0201	0.018 ± 0.004	0.030 ± 0.004	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	0.45 ± 0.10	0.75 ± 0.10	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
CSRT0402	0.028 ± 0.004	0.047 ± 0.004	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	0.70 ± 0.10	1.20 ± 0.10	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
CSRT0603	0.041 ± 0.008	0.071 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.05 ± 0.20	1.80 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
CSRT0805	0.061 ± 0.008	0.091 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.55 ± 0.20	2.30 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
CSRT1206	0.075 ± 0.008	0.120 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	1.90 ± 0.20	3.05 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
CSRT1210	0.112 ± 0.008	0.120 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	2.85 ± 0.20	3.05 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm
CSRT0612	0.112 ± 0.008	0.120 ± 0.008	0.315 ± 0.008	0.069 ± 0.004	0.138 ± 0.002	inches
	2.85 ± 0.20	3.05 ± 0.20	8.00 ± 0.20	1.75 ± 0.10	3.50 ± 0.05	mm

**Packaging Specifications - Paper Tape (cont.)**

Type / Code	G	H	T	P	D	Unit
CSRT0201	0.157 ± 0.004	0.079 ± 0.002	0.014 ± 0.004	0.079 ± 0.004	0.059 +0.004/-0	inches
	4.00 ± 0.10	2.00 ± 0.05	0.35 ± 0.10	2.00 ± 0.10	1.50 +0.10/-0	mm
CSRT0402	0.157 ± 0.004	0.079 ± 0.002	0.018 ± 0.004	0.079 ± 0.004	0.059 +0.004/-0	inches
	4.00 ± 0.10	2.00 ± 0.05	0.45 ± 0.10	2.00 ± 0.10	1.50 +0.10/-0	mm
CSRT0603	0.157 ± 0.004	0.079 ± 0.002	0.024 ± 0.004	0.157 ± 0.004	0.059 +0.004/-0	inches
	4.00 ± 0.10	2.00 ± 0.05	0.60 ± 0.10	4.00 ± 0.10	1.50 +0.10/-0	mm
CSRT0805	0.157 ± 0.004	0.079 ± 0.002	0.030 ± 0.004	0.157 ± 0.004	0.059 +0.004/-0	inches
	4.00 ± 0.10	2.00 ± 0.05	0.75 ± 0.10	4.00 ± 0.10	1.50 +0.10/-0	mm
CSRT1206	0.157 ± 0.004	0.079 ± 0.002	0.030 ± 0.004	0.157 ± 0.004	0.059 +0.004/-0	inches
	4.00 ± 0.10	2.00 ± 0.05	0.75 ± 0.10	4.00 ± 0.10	1.50 +0.10/-0	mm
CSRT1210	0.157 ± 0.004	0.079 ± 0.002	0.030 ± 0.004	0.157 ± 0.004	0.059 +0.004/-0	inches
	4.00 ± 0.10	2.00 ± 0.05	0.75 ± 0.10	4.00 ± 0.10	1.50 +0.10/-0	mm
CSRT0612	0.157 ± 0.004	0.079 ± 0.002	0.030 ± 0.004	0.157 ± 0.004	0.059 +0.004/-0	inches
	4.00 ± 0.10	2.00 ± 0.05	0.75 ± 0.10	4.00 ± 0.10	1.50 +0.10/-0	mm

**Packaging Specifications - Embossed Tape**

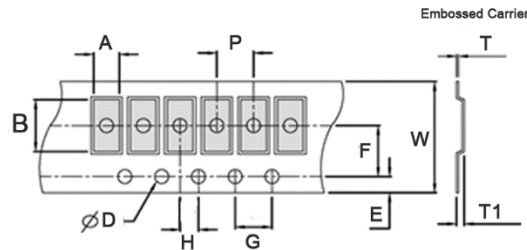

Type / Code	A	B	W	E	F	G	Unit
CSRT2010	0.110 ± 0.008	0.220 ± 0.008	0.472 ± 0.004	0.069 ± 0.004	0.217 ± 0.002	0.157 ± 0.004	inches
	2.80 ± 0.20	5.60 ± 0.20	12.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	mm
CSRT2512	0.134 ± 0.008	0.264 ± 0.008	0.472 ± 0.004	0.069 ± 0.004	0.217 ± 0.002	0.157 ± 0.004	inches
	3.40 ± 0.20	6.70 ± 0.20	12.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	mm
CSRT1020	0.110 ± 0.008	0.220 ± 0.008	0.472 ± 0.004	0.069 ± 0.004	0.217 ± 0.002	0.157 ± 0.004	inches
	2.80 ± 0.20	5.60 ± 0.20	12.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	mm
CSRT1225	0.134 ± 0.008	0.264 ± 0.008	0.472 ± 0.004	0.069 ± 0.004	0.217 ± 0.002	0.157 ± 0.004	inches
	3.40 ± 0.20	6.70 ± 0.20	12.00 ± 0.10	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	mm

Type / Code	H	T	T1	P	D	D1	Unit
CSRT2010	0.079 ± 0.002	0.009 ± 0.004	0.033 ± 0.006	0.157 ± 0.004	0.059 +0.004/-0	0.059 ± 0.004	inches
	2.00 ± 0.05	0.23 ± 0.10	0.85 ± 0.15	4.00 ± 0.10	1.50 +0.10/-0	1.50 ± 0.10	mm
CSRT2512	0.079 ± 0.002	0.009 ± 0.004	0.033 ± 0.006	0.157 ± 0.004	0.059 +0.004/-0	0.059 ± 0.004	inches
	2.00 ± 0.05	0.23 ± 0.10	0.85 ± 0.15	4.00 ± 0.10	1.50 +0.10/-0	1.50 ± 0.10	mm
CSRT1020	0.079 ± 0.002	0.009 ± 0.004	0.033 ± 0.006	0.157 ± 0.004	0.059 +0.004/-0	0.059 ± 0.004	inches
	2.00 ± 0.05	0.23 ± 0.10	0.85 ± 0.15	4.00 ± 0.10	1.50 +0.10/-0	1.50 ± 0.10	mm
CSRT1225	0.079 ± 0.002	0.009 ± 0.004	0.033 ± 0.006	0.157 ± 0.004	0.059 +0.004/-0	0.059 ± 0.004	inches
	2.00 ± 0.05	0.23 ± 0.10	0.85 ± 0.15	4.00 ± 0.10	1.50 +0.10/-0	1.50 ± 0.10	mm

**RoHS Compliance**

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

**“Conflict Metals” Commitment**

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

**Compliance to “REACH”**

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

**Environmental Policy**

It is the policy of Stackpole Electronics, Inc. to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

**How to Order**

