


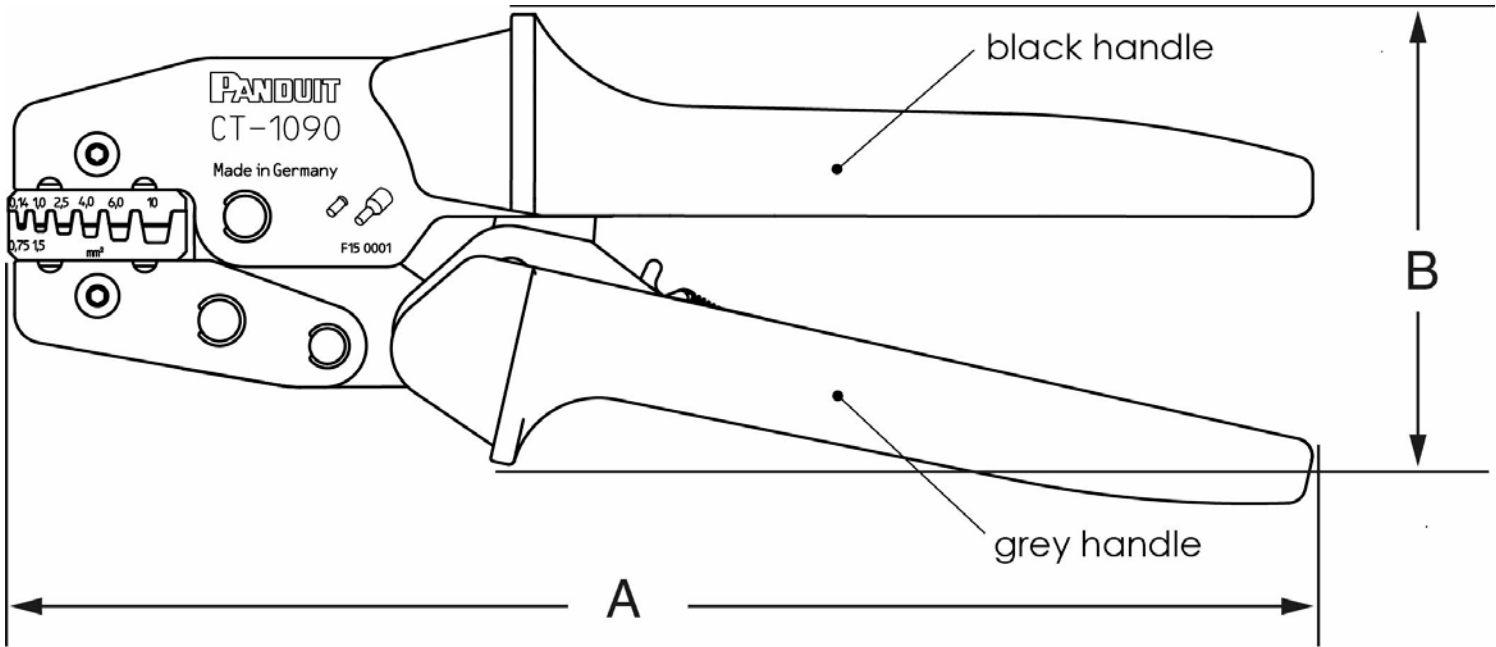

PROFILE	mm²
1	0,14-0,75
2	1,0-1,5
3	2,5
4	4,0
5	6,0
6	10,0

NOTES, UNLESS OTHERWISE SPECIFIED:

SPECIFICATIONS:
PANDUIT TOOL NO: CT-1090 Controlled Cycle Ferrule Crimp Tool
Square profile for #26 - 10 AWG (0.14-6.0mm²) insulated and non-insulated single wire ferrules and #22 - 12 AWG (0.05 - 4.0mm²) insulated twin ferrules.

For wire end ferrules with or without plastic shroud 0,14-10 mm² acc. to DIN 46228

TOOL WEIGHT: (WITHOUT FERRULES) 17.9 oz (0,51kg)


- THIS TOOL'S FEATURES INCLUDE:
- Easy handling, integrated, releasable ratchet guarantees complete crimping
 - Ergonomically developed soft-grips with slip-off protection

Fully recyclable
RoHS Directive 2011/65/EU compliant

DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
DIMENSIONS IN PARENTHESES ARE (MM) METRIC.

A = 8.66 (220) OVERALL LENGTH
B = 3.14 (80) OVERALL HEIGHT
C = 0.78 (20) OVERALL DEPTH

File Location: Teamcenter

							CT-1090 TOOL						
							CUSTOMER DRAWING						
							ITEM REVISION NAME: TF28191B01_00						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± --- (.xxx) ± --- (.xx) ± --- ANGLES ± ---						
							 THIRD ANGLE PROJECTION				MATERIAL: -----		
											DRAWING NUMBER: TF28191B01		
00	9-07-16	BLR	BJPU	JADT	RELEASED	10219	DRAWN BY: BLR	DATE: 9-07-16	CHK BJPU	SCALE NONE	SHT 1 OF 1	SIZE B	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN							