



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/12/10	D.GRIFFIN
B	ECN4755: FERRITE LOCATION DIM WAS 0.65" [16.60]	05/18/10	DFP

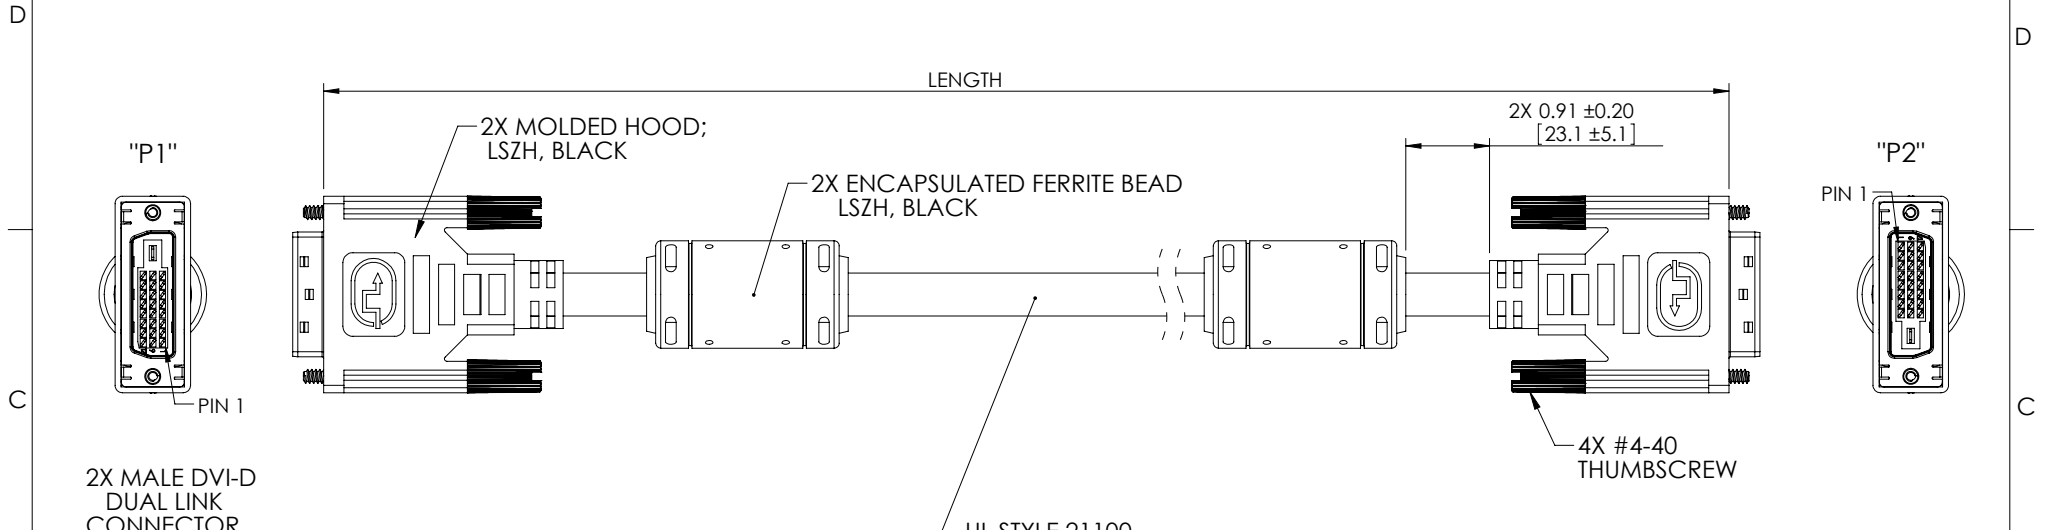

UL STYLE 21100,
 (7) SHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
 (1) UNSHIELDED TWISTED PAIR, 28AWG, STRANDED TINNED COPPER,
 (3) CONDUCTORS, 28AWG, STRANDED TINNED COPPER,
 SHIELDING (BRAIDED): 36AWG TINNED COPPER
 SHIELDING: ALUMINUM/POLYESTER
 OUTER JACKET: LSZH, BLACK

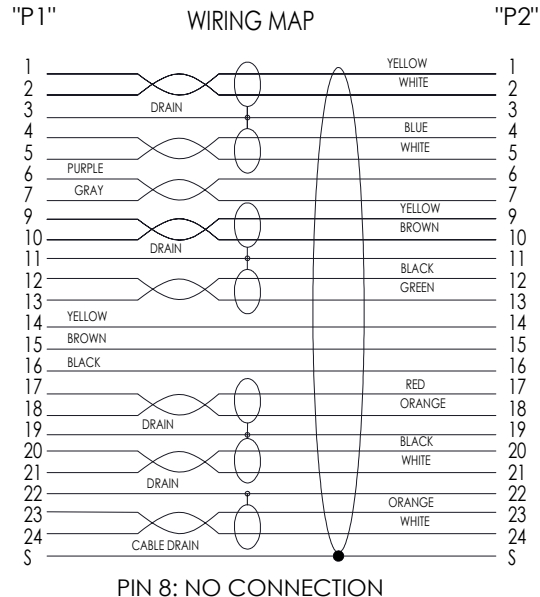

P/N	LENGTH	
	FEET	METERS
CTLDVIDMMLZ-3	3.0	.92
CTLDVIDMMLZ-5	5.0	1.52
CTLDVIDMMLZ-10	10.0	3.05
CTLDVIDMMLZ-15	15.0	4.57

RoHS Compliant ✓

- NOTES:**
1. CABLES TO BE TESTED FOR CONTINUITY
 2. CABLES TO BE INDIVIDUALLY PACKAGED PER L-COM SPECIFICATION PS-0031.
 3. DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).
 4. NO L-COM LOGO REQUIRED ON MOLDED HOODS.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\le 12 [305] = +1 [25] / -0$ $>12 [305] \le 60 [1524] = +2 [51] / -0$ $>60 [1524] \le 120 [3048] = +4 [102] / -0$ $>120 [3048] \le 300 [7620] = +6 [152] / -0$ $>300 [7620] = +3\% / -0\%$	APPROVALS DRAWN BY D. PARHAM	DATE 02/11/2010		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845				
	ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005	CHECKED BY J. RUST		02/12/2010	CATEGORY VIDEO	PRODUCT DESCRIPTION DVI-DL M/DVI-DL M W/FERRITE, LSZH		
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	APPROVED BY P. McNEIL	02/12/2010	<table border="1"> <tr> <td>SIZE A</td> <td>FSCM NO. 43321</td> <td>DWG. NO. CTLDVIDMMLZ</td> <td>REV. B</td> </tr> </table>	SIZE A	FSCM NO. 43321	DWG. NO. CTLDVIDMMLZ	REV. B
SIZE A	FSCM NO. 43321	DWG. NO. CTLDVIDMMLZ	REV. B					
REF	COLOR VARIATIONS MAY OCCUR	SCALE: NONE	CAD FILE: CTLDVIDMMLZ.SLDDRW	SHEET 1 OF 1				