

DC Axial Fan

D1238B



□ 120 × 38 (□ 4.7" × 1.5")

Max. airflow: 6.2 m³/min
Max. static pressure: 300 Pa
Mass: 430 g

Fan model code

D1238B12B7AZ-00

D1238B12B8AP-00

D1238B12B8AZ-00

D1238B12B9AP-00

D1238B12B9AZ-00

D1238B24B7AP-00

D1238B24B7AZ-00

D1238B24B8AS-00

D1238B24B8AZ-00

D1238B24B9AP-00

D1238B24B9AS-00

D1238B24B9AZ-00

D1238B24BAAZ-00

D1238B48B7AP-00

D1238B48B7AZ-00

D1238B48B8AP-00

D1238B48B8AS-00

D1238B48B8AZ-00

D1238B48B9AP-00

D1238B48B9AS-00

D1238B48B9AZ-00

D1238B48BAAP-00

D1238B48BAAS-00

D1238B48BAAZ-00

Standard specification

Max. Airflow		Max. Static Pressure		Noise dB	Speed min ⁻¹	Input W	Voltage Spec. V		Current mA		Model Code	Operating Temp. Range °C
m³/min	CFM	Pa	inH ₂ O				Rating	Operating Range	Rating	Starting		
6.2	219	300	1.21	62	5500	26.4	24	18-27.6	1100	2700	D1238B24BAAZ-00	-20 ~ +70
							48	36-55.2	560		D1238B48BAAZ-00	
5.25	185	250	1.01	59	4900	19.8	12	8.4-13.8	1650	5200	D1238B12B9AZ-00	
						19.7	24	16.8-27.6	820	2600	D1238B24B9AZ-00	
						19.2	48	36-55.2	400	950	D1238B48B9AZ-00	
						14.4	12	8.4-13.8	1200		D1238B12B8AZ-00	
4.8	169	185	0.74	56	4400	13.9	24	16.8-27.6	580	1850	D1238B24B8AZ-00	
						15.4	48	36-55.2	320		D1238B48B8AZ-00	
4.4	155	160	0.64	54	4000	14.4	12	8.4-13.8	1200		D1238B12B7AZ-00	
						14.4	24	16.8-27.6	600	1600	D1238B24B7AZ-00	
						12.0	48	36-55.2	250	1600	D1238B48B7AZ-00	


- Figures in the table are average measured values. Please request the product delivery specification when preparing a purchase specification.
- The characteristics are the values at rated voltage (12 V, 24 V or 48 V), and normal temperature and humidity.

General specification


Materials Used	Venturi: Aluminum alloy die castings Propeller: ABS and PBT synthetic resins Bearing: Both side shielded ball bearing
Motor	Brushless DC motor, Protection type: Overcurrent detection and automatic resetting by current limiting
Common Elec. Spec.	See pages G-11, G-12, G-13.

Standard airflow and static pressure characteristics (At rated voltage)

[By double chamber method]




Wiring connection diagram

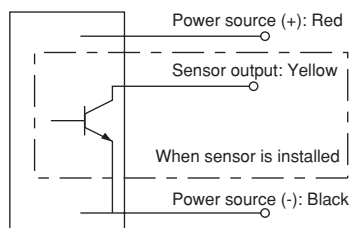

Customized fans with a higher airflow are also available.
Please contact NIDEC SERVO for more information.


External dimensions in mm (inches)

● Lead wire type

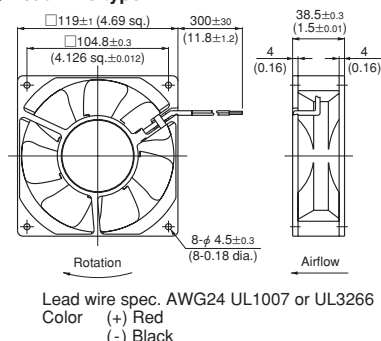

Lead wire spec. AWG24 UL1007 or UL3266
Color (+) Red
(-) Black

Mounting hole dimensions in mm (inches)
[Recommendation]



Options (sold separately)

- Guard: F120UL guard
- Filter: F120 filter

DC axial fan with sensor

Rated Vol.	Model Code			
12 V		D1238B12B8AP-00	D1238B12B9AP-00	
24 V	D1238B24B7AP-00	D1238B24B8AS-00	D1238B24B9AS-00	
48 V		D1238B48B8AS-00	D1238B48B9AS-00	D1238B48BAAS-00
	D1238B48B7AP-00	D1238B48B8AP-00	D1238B48B9AP-00	D1238B48BAAP-00

- PWM (pulse width modulation) allowing for variable speed control is available in some models (reference the G-51 spec).
- NIDEC SERVO can meet many of your requirements for customization, such as special connectors, other sensors not listed above, variable speed specifications, and other modifications. Please contact NIDEC SERVO during your product planning and development stage.
- The listed products are registered in the following overseas standards files, UL: E129458, CSA: LR49399, TUV: R50004410
- 3D data is also available at our web2-CAD site (www.cadenas.co.jp).

Fan model code

D0925C12B8ZP-00
D0925C24B8ZP-00
D1238B48B7ZP-00
D1751M24B4ZP-00
D1751M24B5ZP-00
D1751M24B6ZP-00
D1751M24B7ZP-00
D1751M24B8ZP300
D1751M24B9ZP300
D1751M48B4ZP-00
D1751M48B5ZP-00
D1751M48B6ZP-00
D1751M48B7ZP-00
D1751M48B8ZP-00
D1751M48B9ZP-00
D1751S24B4ZP-00
D1751S24B5ZP-00
D1751S24B6ZP-00
D1751S24B6ZQ-00
D1751S24B7ZP-00
D1751S24B8ZP300
D1751S24B9ZP300
D1751S48B4ZP-00
D1751S48B5ZP-00
D1751S48B6ZP-00
D1751S48B7ZP-00
D1751S48B8ZP-00
D1751S48B9ZP-00
D1751S24B4ZR-13
E1033H12B8ZS-00
E1033H12BAZP-00
E1033H24BAZS-00
E1033H24BAZP-00
E2271Z24B5YP-00
E2271Z48B7ZP-00

Lineup of PWM variable-speed semi-standard products

- A PWM signal from the customer equipment is input to the control line (blue) of the fan motor for variable-speed operation of fans and blowers. (Input and noise can be reduced when the internal temperature of the customer equipment is low, such as during idling.)

Sizes



Axial fans: □60 mm~□172 mm
Blower: □70 mm~φ220 mm

Characteristics for reference

(The characteristics are typical characteristics and their curves will differ, depending on the particular model)

- Standard values for PWM control signal - speed specification (at rated voltage, open, and normal temperature and humidity)

I _{out}	1 mA MAX.
V _{out}	5 V MAX.
V _{LoSat}	0.4 MAX.
Freq.	500 Hz~5000 Hz

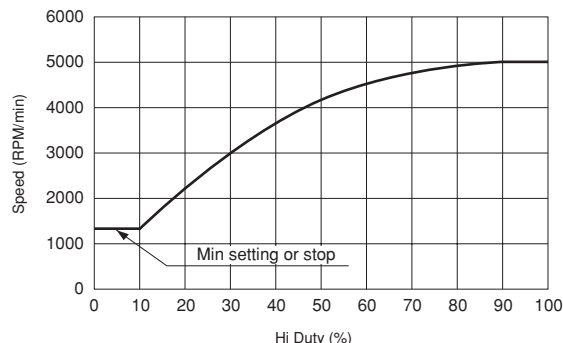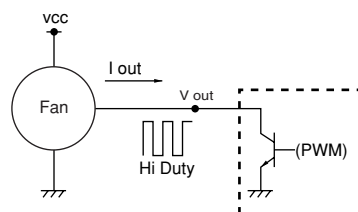


Semi-standard products (Products in regular production)

Size	Model Code	Max. Airflow		Max. Static Pressure		Noise dB	Speed min ⁻¹		Voltage Spec. V		Operating Temp. Range °C
		m ³ /min	CFM	Pa	inH ₂ O		Max.	Min.	Rating	Operating Range	
□92×25mm	D0925C12B8ZP-00	2	71	67	0.27	40	4450	1000	12	10.2-13.2	-20 ~ 60°C
	D0925C24B8ZP-00						4450	1750	24	21.6-26.4	
□120×38mm	D1238B48B7ZP-00	4.4	155	170	0.68	54	4000	1250	48	40.8-55.2	-20 ~ 70°C
	D1751M24B9ZP300	14.2	501	580	2.33	75	6800	3200	24	16-28	
φ172×150×51mm	D1751M48B9ZP-00								48	36-60	-20 ~ 70°C
	D1751M24B8ZP300	12.7	448	510	2.05	72	6100	2600	24	16-28	
	D1751M48B8ZP-00								48	36-60	
	D1751M24B7ZP-00	11.4	402	410	1.65	69	5400	1500	24	12-27.6	
	D1751M48B7ZP-00								48	36-60	
	D1751M24B6ZP-00	10.2	360	315	1.27	64	4800	1000	24	12-27.6	
	D1751M48B6ZP-00								48	36-60	
	D1751M24B5ZP-00	9	318	260	1.04	61	4200	1000	24	12-27.6	
	D1751M48B5ZP-00								48	36-60	
	D1751M24B4ZP-00	8	282	205	0.82	57	3800	1000	24	12-27.6	
	D1751M48B4ZP-00								48	36-60	
	D1751S24B9ZP300	14.2	501	640	2.57	68	6800	3200	24	16-28	
	D1751S48B9ZP-00								48	36-60	
	D1751S24B8ZP300	12.7	448	520	2.09	65	6100	2600	24	16-28	
φ172×51mm	D1751S48B8ZP-00								48	36-60	-20 ~ 60°C
	D1751S24B7ZP-00	11.4	402	435	1.75	62	5400	1500	24	12-27.6	
	D1751S48B7ZP-00								48	36-60	
	D1751S24B6ZP-00	10.2	360	335	1.35	59	4800	1000	24	12-27.6	
	D1751S48B6ZP-00								48	36-60	
	D1751S24B5ZP-00	9	318	270	1.08	56	4200	1000	24	12-27.6	
	D1751S48B5ZP-00								48	36-60	
	D1751S24B4ZP-00	8	282	220	0.88	53.5	3800	1000	24	12-27.6	
	D1751S48B4ZP-00								48	36-60	
	※ D1751S24B4ZR-13	8	282	230	0.92	53.5	3800	1500	24	20.4-27.6	
97×95×33mm (Blowers)	E1033H12B8ZS-00	0.85	30	320	1.29	51	3450	1250	12	10.8-13.2	-20 ~ 70°C
	E1033H12BAZP-00										
	E1033H24BAZP-00	1.14	40	500	2.01	58	4850	1800	24	21.6-26.4	-20 ~ 60°C
	E1033H24BAZS-00										
φ220×71mm (Blowers)	E2271Z48B7ZP-00	18.1	639	600	2.41	74	3200	1000	48	36-57	-20 ~ 60°C
	E2271Z24B5YP-00	14.7	519	470	1.89	66	2650	530	24	21.6-26.4	-20 ~ 40°C

※: The D1751S24B4ZR-13 is a FFU (Fan Filter Unit) product. Only this version has 'voltage speed control' whereby speed is varied by control voltage.


- Aside from the above models, please see also the high pressure, variable speed G series fans. Details may be found in specs G-31 to G-36.
- The lineup of variable-speed fans and blowers will be expanded regularly. Visit the NIDEC SERVO Website for information on the latest lineup.
- Direct your inquiry to NIDEC SERVO for connector termination to lead wires, for sensor specifications other than those contained in the catalog and for variable speed specifications. (Products tailored to voltage command control and resistance value command control are also available)
- To ensure correct installation and smooth operation please obtain a drawing for approval or reference drawing from NIDEC SERVO Co.

F60P Guard (Mass 4 g)




Material: Polycarbonate (black)
UL94V-2

F60UL Guard (Mass 12 g)




Material: Mild steel wire 1.6 dia.
Surface treatment:
Nickel chromium plating

F80UL Guard (Mass 14 g)




Material: Mild steel wire 1.6 dia.
Surface treatment:
Nickel chromium plating

F92UL Guard (Mass 16 g)




Material: Mild steel wire 1.6 dia.
Surface treatment:
Nickel chromium plating

F120UL Guard (Mass 29 g)




Material: Mild steel wire 1.6 dia.
Surface treatment:
Nickel chromium plating

F127UL Guard




Material: Mild steel wire 1.6 dia.
Surface treatment:
Nickel chromium plating

GUARD 172




Material: Mild steel wire 2 dia.
Surface treatment:
Nickel chromium plating

F180UL Guard

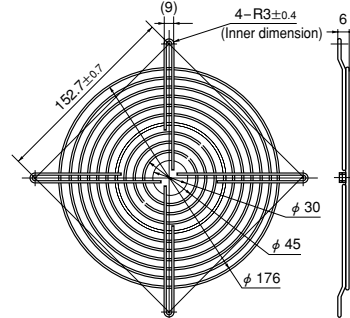


Material: Mild steel wire 1.6 dia.
Surface treatment:
Nickel chromium plating

F200UL Guard (Mass 82 g)

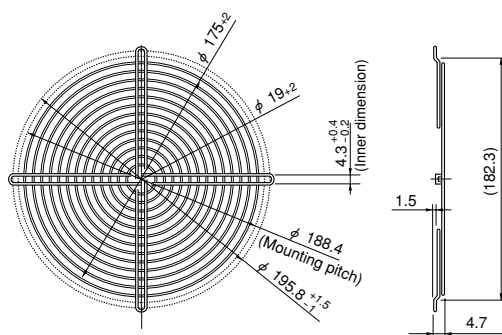


Material: Mild steel wire 1.6 dia.
Surface treatment:
Nickel chromium plating

SCU Guard (Mass 50 g)



Material: Mild steel wire 1.6 dia.
Surface treatment:
Nickel chromium plating

SCN Guard (Mass 55 g)



Material: Mild steel wire 1.6 dia.
Surface treatment:
Nickel chromium plating

• Guard special for intake side of
SCU (metal venturi) fans.

• Guard special for intake side of
SCN (metal venturi) fans.

List of mating fan series


Guard	F60P	F60UL	F80UL	F92UL	F120UL	F127UL	GUARD 172	F180UL	F200UL	SCN	SCU
AC Axial Fans											
SCU					○*1						○*2
SCN					○*1					○*2	
VE			○								
WE				○							
KA				○							
CU					○						
CN					○						
MA							○				
PA							○				
PL								○			
DC Axial Fans											
TUDC	○	○									
PUDC			○								
KUDC				○							
DO925C				○							
KLDC				○							
CUDC					○						
D1225C					○						
CNDC					○						
D1238T					○						
D1238B					○						
D1338B					○						
D1338S					○						
D1751M							○				
D1751S							○				
G0638D		○									
G0838C			○								
G0938B				○							
G1238B					○						
G1751M							○				

*1: Can be installed only on outlet side. *2: Can be installed only on intake side.


All guards conform to the UL standard when combined with NIDEC SERVO fans. The installation of a filter, guard and other accessories will constitute a ventilating load, reducing the airflow. Select a suitable guard, taking into consideration the increase in air resistance. (See Figs. 12 and 13 on page G-7.)

Filter

3-piece set

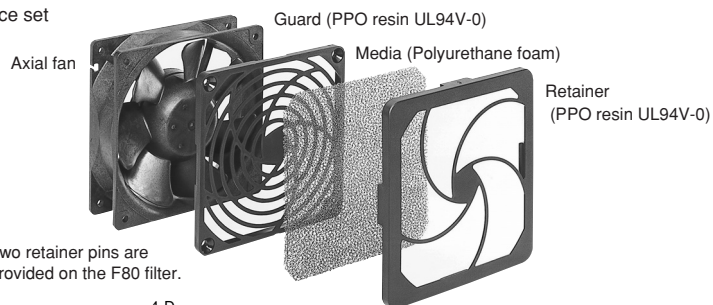

Note: Two retainer pins are provided on the F80 filter.

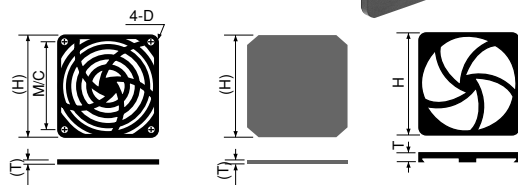


List of mating fan series

Filter	F80	F92	F120
PUDC	○		
KUDC		○	
D0925C		○	
KLDC		○	
CUDC			○
D1225C			○
CNDC			○
D1238T			○
D1238B			○
G0838C	○		
G0938B		○	
G1238B			○

Filter	F80	F92	F120
VE	○		
WE		○	
KA		○	
CU			○
CN			○


Component (Model Code)	H	T	M/C	D
F80 Filter	83.6	10	71.5	φ 3.8
F92 Filter	96.5	10	82.5	φ 3.8
F120 Filter	123.7	10.7	104.8	φ 4.6

Flange spacer



Component (Model Code)	A mm	B mm	C mm	D mm	E mm	Mating Model Code
Flange Spacer PUDC (※)	5	8	2	17	14.5	KUDC, PUDC
Flange Spacer CUDC (※)	8	11	3.5	15	19.8	CUDC
Flange Spacer CNDC	8	11	3.5	28	19.8	CNDC


※Ribbed venturis (PUDC-R, CUDC-R) are available for PUDC and CUDC.



Insert a flange spacer into the ribs of a venturi.

(Installing a flange spacer)

Inlet ring

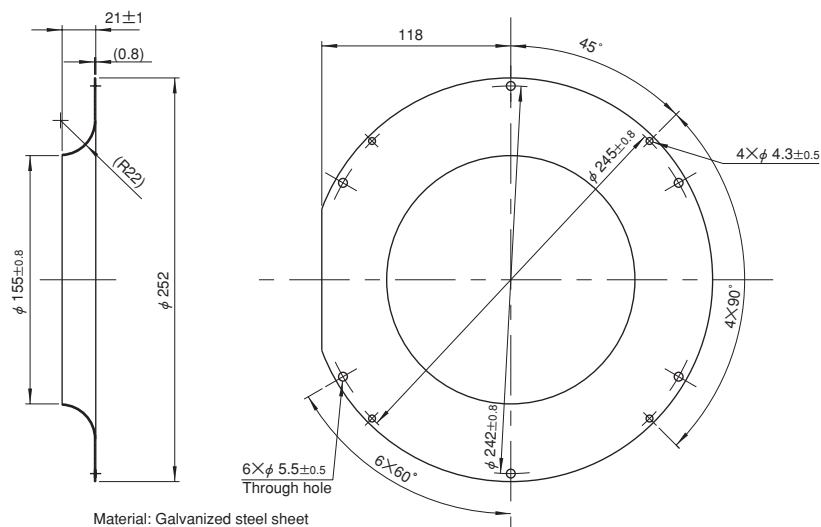

Material: Galvanized steel sheet

Component (Model Code)	Mating Model Code
E2271 Inlet ring	E2271Z

DC axial fans & blowers with sensors


The DC fans and blowers of NIDEC SERVO have a function to send an alarm signal when the fan motor revolutions slow down. Several systems are used to cut off the system power supply by this alarm signal, with three types of sensors available. Select the right type of sensor in accordance with the purpose of use. The lead wire for the sensor is yellow. The output type is an open collector output for all three types.

■ Sensor type

1. Lock detection type (Product code: S)

The output signal indicates an [L] state (transistor is ON) while the propeller is rotating, changing to an [H] state (transistor is OFF) less than five seconds after the propeller stops rotating. The propeller automatically restarts operation within five seconds when the lock is unlocked. ([H] → [L] 5 s). If the pull-up voltage is live, the [H] state (transistor is OFF) will engage in less than five seconds, even when the power is turned off.

- Specification: $V_{CE} = 28 \text{ V max}$
(55.2 V max for 48 V products)
 $I_C = 5 \text{ mA max}$
($V_{CE(SAT)} = 0.4 \text{ V max}$)
- Output waveform

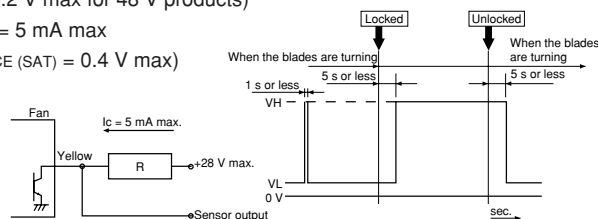


※When the power is turned on, the state sometimes becomes high [H] for several hundred ms.

2. Pulse output type (Product code: P)

A rectangular wave of two pulses will be output for each turn of the propeller while the propeller is rotating, outputting two types of signal depending on the propeller position when the propeller is locked. (See the note below ※)

- Specification: $V_{CE} = 28 \text{ V max}$
(55.2 V max for 48 V products)
 $I_C = 5 \text{ mA max}$
($V_{CE(SAT)} = 0.4 \text{ V max}$)
- Output waveform

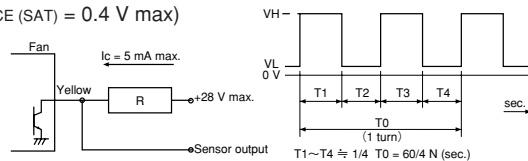

※Output signal waveform when the fan is stopped: The following two types of waveform are output, depending on the blade position when the propeller is stopped:
Pulse outputs of High - constant or restart timing (0.05 Hz to 2 Hz).


3. Speed detection type (Product code: Q)

The output signal indicates the [H] state when the propeller revolutions are slower than the preset speed, changing to the [L] state when the propeller revolutions exceed the reset speed.

[Products with a reversed output waveform are also available, suitable for a wired OR connection when several fans are installed. Contact NIDEC SERVO for further information. {Former code: SQ, new code (15 - digit code products): R}]

- Specification: $V_{CE} = 28 \text{ V max}$
(55.2 V max for 48 V products)
 $I_C = 5 \text{ mA max}$
($V_{CE(SAT)} = 0.4 \text{ V max at } 5 \text{ mA}$)

● Output waveform

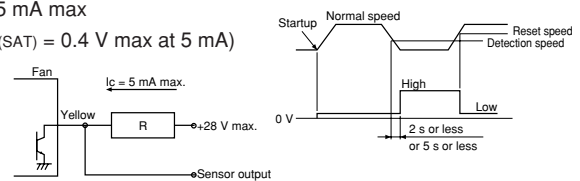

Note: The output waveform for type SQ (R) will be reversed.

The speed setting for the alarm output is about half the rated speed.

For more detailed information, please request a product delivery specification from NIDEC SERVO.

AC fans with sensors

By equipping the motor with a rotation detection function, the AC fans of NIDEC SERVO have a system to send an alarm signal when the fan motor revolutions slow down and to cut off the system power supply. In 1980, NIDEC SERVO developed a system to output an alarm signal by detecting the lowering of generated voltage by installing a tachometer generator with the cooling fan and this system has since been incorporated in NIDEC SERVO products. The output type of the alarm signal is an open collector output.


Type	Tachometer generator type			
Sensor output operation	Open collector transistor, permissible sync Current: 50 mA max. Permissible imposed voltage: DC 40 V max. Permissible power consumption: 1.5 W max. (at 25 °C)			
Sensor output operation	AC power supply	Speed	Output transistor operation	Output state
	OFF		OPEN	HIGH (Abnormal)
	ON	Below detection speed	OPEN	HIGH (Abnormal)
	ON	Above detection speed	CLOSE	LOW (Normal)
Detection speed RD	1500 ~ 2200 rpm			
Detection delay time TD	2 s or less 17 Type			
Type	Standard speed			
Insulation resistance	10 M Ω or higher by a DC 500 V: Between the sensor lead and venturi			
Dielectric strength	Between the sensor lead and venturi		No anomaly allowed after applying AC 500 V 50 Hz for 1 minute	

■ Sensor specification


■ Operational and handling precautions

Operate fans and blowers at an ambient temperature of between -10 °C and 60 °C and relative humidity of less than 90 %. Latch output is not used so malfunction by electrical noise can be ruled out. However, note that the semiconductor devices in the internal circuitry may be damaged by electrical noise and high voltage. No delay circuit is provided so a trouble signal is output on startup. As when operating and handling the fan, exercise caution to avoid dropping and exposing the blower to shock and vibration.


■ Sensor connection



1. LED Display



2. Relay operation



※ A sensor is available with the AS ad PL series only.