



**MAIDA STYLE NUMBER** D61ZOV581RA65

**MAIDA ITEM NUMBER** 01-3288

The Standard Series is our broadest and most comprehensive line of radial-leaded varistors. These components consist of wire leads and have nominal disk diameters from 5mm to 25mm. They are available with maximum continuous operating voltages (MCOV) ranging from 11VAC to 1000VAC (up to 1500VAC upon request). The Standard Series is designed to handle most low and medium power applications requiring through-hole components. Most sizes are available in Tape and Reel and ammo pack.

The Maida Style Number is the typical means to identify our components when ordered. The style number identifies several parameters that are important for the characteristics of the device. An alternative ordering method, if known, is by our Item Number.

The following example is the standard part numbering system when ordering our Standard Series components by the Maida Style Number:

**D 65 21 ZOV 131 RA 20 T1N**

**Coating Designation**

D – Standard Epoxy Coating  
 P – Phenolic Coating  
 None – Denote no conformal coating.

**Nominal Sizes**

58 - 5mm      69 - 14mm  
 73 - 7mm      64 - 16mm  
 68 - 8mm      63 - 18mm  
 61 - 10mm     65 - 20mm  
 71 - 11mm     66 - 25mm  
 62 - 12mm

**Lead Configuration**

**Material Identifier**

Zinc Oxide Varistor (ZOV)

**AC Voltage Rating**

Two significant figures plus number of zeroes that follow, i.e. 131 is 130VAC

**Special Instructions**

RA is standard (RB, RD, RX optional)

**Rating Code**

Up to four numbers

**Optional Taping Code**

T - Tape and Reel or Tape and Ammo  
 Followed by two digit alphanumeric

**Electrical Specifications**

Continuous AC Voltage	580 VAC
Continuous DC Voltage	735 VDC
Maximum DC Leakage @ 735 VDC	200 uA
Low Varistor Voltage Limit	821 VDC
High Varistor Voltage Limit	1002 VDC
Nominal Varistor Voltage	912 VDC
Current for Varistor Voltage	1 mA
Maximum Clamp Voltage	1500 V
Maximum Clamp Voltage Test Current	25 A
Peak Current Rating (1 Pulse)	3500 A
Peak Current Rating (2 Pulse)	2500 A
Energy Rating (8X20us)	140 J
Typical Capacitance	95 pF
Impulse Response Time	< 50 ns
Minimum Hipot of Coating	2500 VDC
Minimum I.R. of Coating	1000 MΩ
Current/Energy Derating Above 85°C	-2.5 %/°C

**Special Notes:**

**Safety Agency Recognitions**

UL 1449 File Number      E321173  
 - Tested to Type:            5-1kA  
 C-UL File Number        E321173  
 VDE File Number  
 CSA File Number  
 SEV File Number


**MAIDA DEVELOPMENT COMPANY**

P.O. Box 3529  
 Hampton, Virginia 23663  
 Ph: (757) 723-0785 Fax (757) 722-1194

[www.maida.com](http://www.maida.com)

## Characteristic Graphs

### D61 (10mm) SERIES

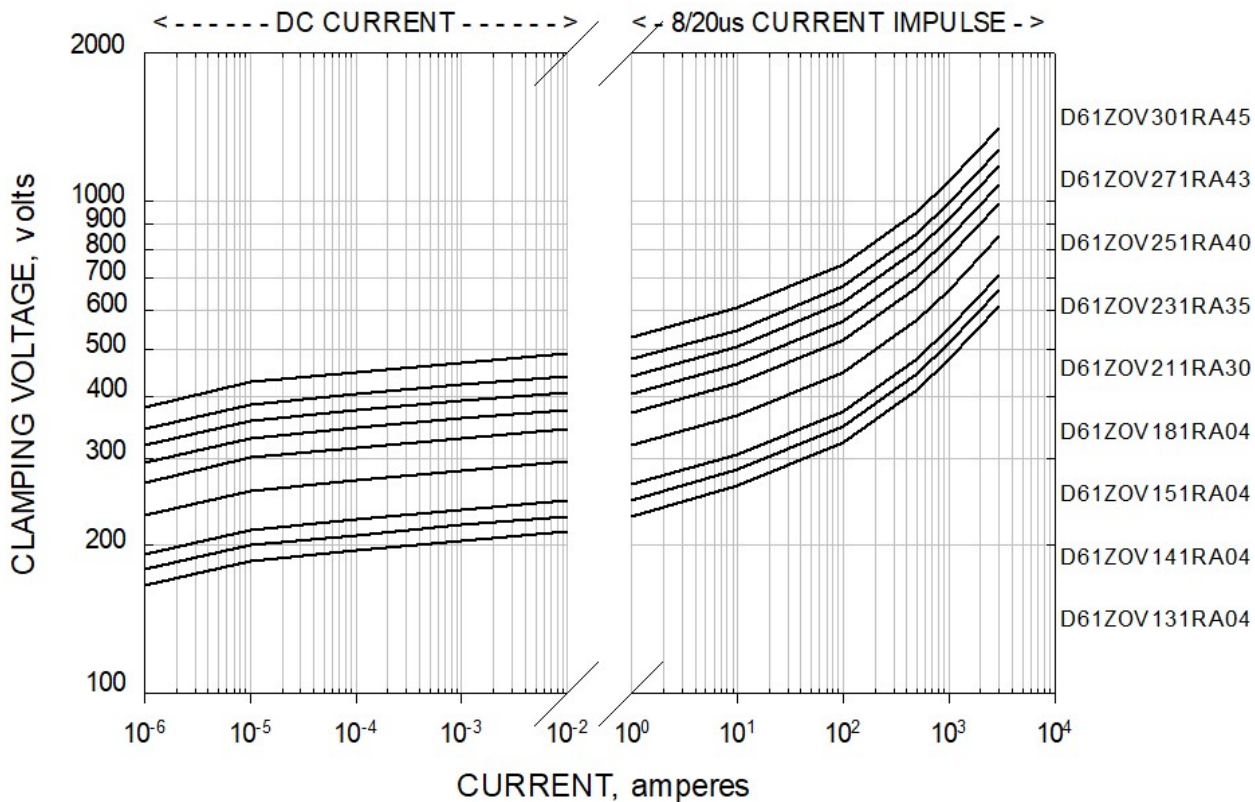



\* Contact Maida for a more detailed configuration drawing.

### Physical Specifications

Lead Style	082J1
X Nominal	0.3 in.
X Tolerance	0.04 in.
Y Nominal	0.212 in.
Y Tolerance	0.03 in.
Z Nominal	0.367 in.
Z Tolerance	0.04 in.
Lead Length Nominal	1.00 in.
Lead Length Tolerance	min. in.
d Nominal	0.032 in.
Wire Gauge	20 AWG
Minimum Marking	Z581-65UL
Nominal Disk Size	10 mm
D Maximum	0.472 in.
T Maximum	0.373 in.
H Maximum	0.597 in.
Coating Type	EPOXY

### Thermal Specifications

Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	85 °C
Varistor Voltage Temperature Coeff	-0.05 %/°C
Minimum Storage Temperature	-50 °C
Maximum Storage Temperature	125 °C
Recommended Solder Temperature	260 °C
Recommended Reflow Temperature	260 °C

### Environmental Compliances



### Recommended Soldering Profile



## MOV Terminology

TECHNICAL TERM	DESCRIPTION
Operating Temperature	Operating Temperature Range without Derating.
Storage Temperature	Storage Temperature Range without Voltage Applied.
Curent / Energy Derating	Derating of maximum Values when Operated above +85°C
Varistor Voltage Temperature Coefficient	$\frac{V_v \text{ at } 85^\circ\text{C} - V_v \text{ at } 25^\circ\text{C}}{V_v \text{ at } 25^\circ\text{C}} \times \frac{1}{60} \times 100$ <p>Where V<sub>v</sub> is varistor voltage at 1mADC</p>
Insulation Resistance	Minimum resistance between shorted terminals and varistor surface.
HiPot Encapsulation	Minimum voltage applied for one minute between shorted terminals and varistor surface.
Impulse Response Time	Time lag between application of surge and varistor's "turn-on" conduction state.
DC Leakage Current	Maximum current with specified DC voltage applied.
Applied Voltage - AC	Maximum continuous sinusoidal RMS voltage which may be applied (MCOV).
Applied Voltage - DC	Maximum continuous DC voltage which may be applied.
Transient Energy (Joules)	The maximum energy absorbed with a varistor voltage change of less than ± 10% when one impulse of an 8x20us current waveform is applied.
Transient Peak Current	The maximum current with a varistor voltage change of less than ± 10% when one impulse of an 8x20us current waveform is applied.
Varistor Voltage	Voltage across the varistor measured at 1mADC
Maximum Clamping Voltage	Peak voltage across the varistor with a specific peak impulse current applied (8x20us).
Capacitance	Typical value measured at 1V <sub>rms</sub> and a test frequency of 1KHz.