



**MAIDA STYLE NUMBER** D65ZOV321HC

**MAIDA ITEM NUMBER** 01-2025

The HC Series, or High Current Series, is our specialized line of round and square, radial-leaded varistors.

The HC Series is designed for pulse repetition and/or higher surge current environments including requirements by many safety agency standards, such as UL943. Most sizes are available in Tape and Reel and ammo pack.

The Maida Style Number is the typical means to identify our components when ordered. The style number identifies several parameters that are important for the characteristics of the device. An alternative ordering method, if known, is by our Item Number.

The following example is the standard part numbering system when ordering our HC Series components by the Maida Style Number:

**D 65 21 ZOV 131 HC T1N**

**Coating Designation**

- D – Standard Epoxy Coating
- P – Phenolic Coating
- R/S – Square Disc Epoxy Coating
- PR/PS – Square Disc Phenolic Coating
- None – Denote no conformal coating.

**Nominal Sizes**

- 68 - 8mm      R61 - 9mm Square
- 61 - 10mm    R71 - 10mm Square
- 71 - 11mm    R62 - 11mm Square
- 62 - 12mm    R69 - 12mm Square
- 69 - 14mm    R64 - 14mm Square
- 79 - 15mm    R65 - 17mm Square
- 64 - 16mm    R80 - 20mm Square
- 63 - 18mm    S66 - 25mm Square
- 65 - 20mm
- 66 - 25mm

**Lead Configuration**

**Material Identifier**

Zinc Oxide Varistor

**AC Voltage Rating**

Two significant figures plus number of zeroes that follow, i.e. 131 is 130VAC

**Special Instructions**

HC is standard

**Optional Taping Code**

T - Tape and Reel or Tape and Ammo  
Followed by two digit alphanumeric

**Electrical Specifications**

Continuous AC Voltage	320 VAC
Continuous DC Voltage	420 VDC
Maximum DC Leakage @ 420 VDC	200 uA
Low Varistor Voltage Limit	453 VDC
High Varistor Voltage Limit	553 VDC
Nominal Varistor Voltage	503 VDC
Current for Varistor Voltage	1 mA
Maximum Clamp Voltage	850 V
Maximum Clamp Voltage Test Current	100 A
Peak Current Rating (1 Pulse)	13000 A
Peak Current Rating (2 Pulse)	10000 A
Energy Rating (8X20us)	375 J
Typical Capacitance	955 pF
Impulse Response Time	< 50 ns
Minimum Hipot of Coating	2500 VDC
Minimum I.R. of Coating	1000 MΩ
Current/Energy Derating Above 85°C	-2.5 %/°C

**Special Notes:**

**Safety Agency Recognitions**

UL 1449 File Number	E321173
- Tested to Type:	5-5kA
C-UL File Number	E321173
VDE File Number	
CSA File Number	
SEV File Number	

**MAIDA DEVELOPMENT COMPANY**

P.O. Box 3529


Hampton, Virginia 23663


Ph: (757) 723-0785 Fax (757) 722-1194

[www.maida.com](http://www.maida.com)

## Characteristic Graphs

### D65 (20mm) SERIES

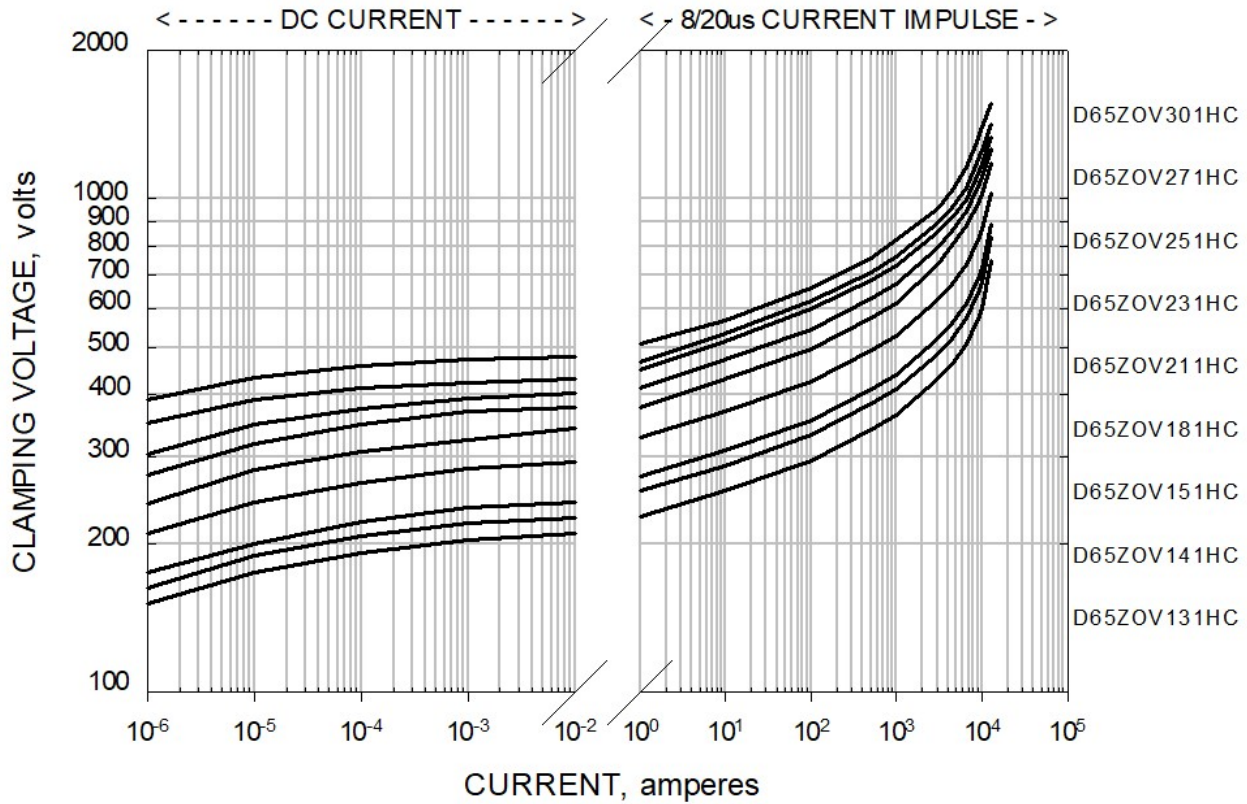

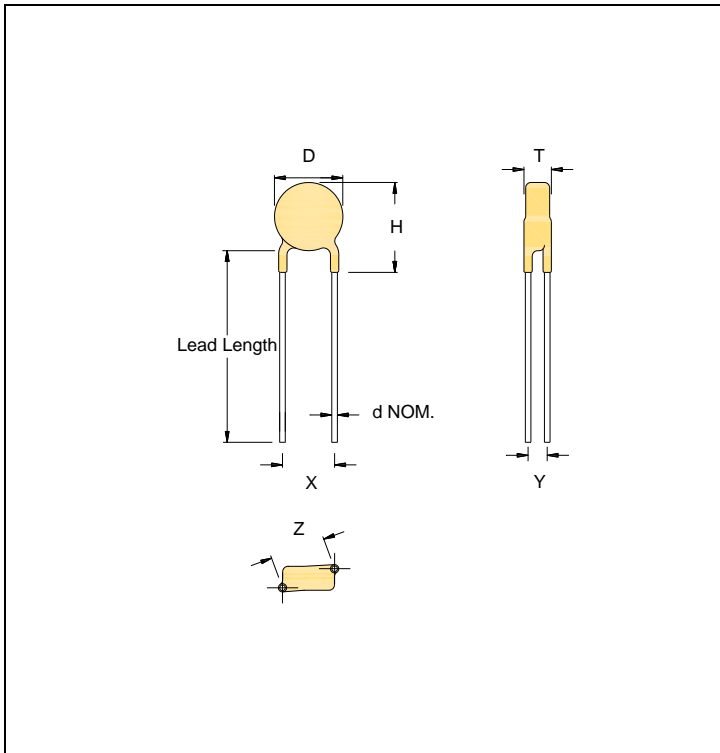

\* Contact Maida for a more detailed configuration drawing.

### Physical Specifications

Lead Style	082J1D
X Nominal	0.3 in.
X Tolerance	0.04 in.
Y Nominal	0.207 in.
Y Tolerance	0.03 in.
Z Nominal	0.364 in.
Z Tolerance	0.04 in.
Lead Length Nominal	1.0 in.
Lead Length Tolerance	min. in.
d Nominal	0.032 in.
Wire Gauge	20 AWG
Minimum Marking	HZ321-160UL
Nominal Disk Size	20 mm
D Maximum	0.905 in.
T Maximum	0.315 in.
H Maximum	1.03 in.
Coating Type	EPOXY


### Thermal Specifications

Minimum Operating Temperature	-40 °C
Maximum Operating Temperature	85 °C
Varistor Voltage Temperature Coeff	-0.05 %/°C
Minimum Storage Temperature	-50 °C
Maximum Storage Temperature	125 °C
Recommended Solder Temperature	260 °C
Recommended Reflow Temperature	260 °C

### Environmental Compliances



### Recommended Soldering Profile

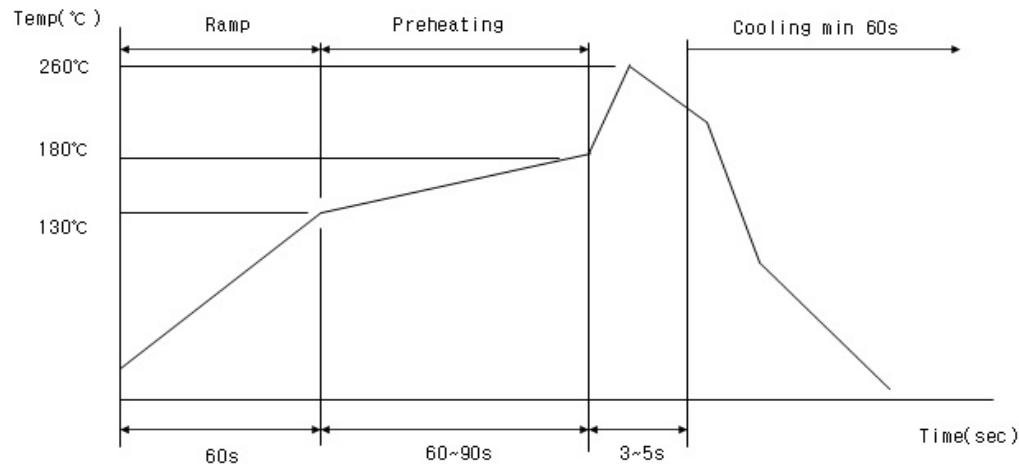

## MOV Terminology

TECHNICAL TERM	DESCRIPTION
Operating Temperature	Operating Temperature Range without Derating.
Storage Temperature	Storage Temperature Range without Voltage Applied.
Curent / Energy Derating	Derating of maximum Values when Operated above +85°C
Varistor Voltage Temperature Coefficient	$\frac{V_v \text{ at } 85^\circ\text{C} - V_v \text{ at } 25^\circ\text{C}}{V_v \text{ at } 25^\circ\text{C}} \times \frac{1}{60} \times 100$ <p>Where Vv is varistor voltage at 1mADC</p>
Insulation Resistance	Minimum resistance between shorted terminals and varistor surface.
HiPot Encapsulation	Minimum voltage applied for one minute between shorted terminals and varistor surface.
Impulse Response Time	Time lag between application of surge and varistor's "turn-on" conduction state.
DC Leakage Current	Maximum current with specified DC voltage applied.
Applied Voltage - AC	Maximum continuous sinusoidal RMS voltage which may be applied (MCOV).
Applied Voltage - DC	Maximum continuous DC voltage which may be applied.
Transient Energy (Joules)	The maximum energy absorbed with a varistor voltage change of less than $\pm 10\%$ when one impulse of an 8x20us current waveform is applied.
Transient Peak Current	The maximum current with a varistor voltage change of less than $\pm 10\%$ when one impulse of an 8x20us current waveform is applied.
Varistor Voltage	Voltage across the varistor measured at 1mADC
Maximum Clamping Voltage	Peak voltage across the varistor with a specific peak impulse current applied (8x20us).
Capacitance	Typical value measured at 1Vrms and a test frequency of 1KHz.