



FEMALE END VIEW (DB25 CONNECTOR)

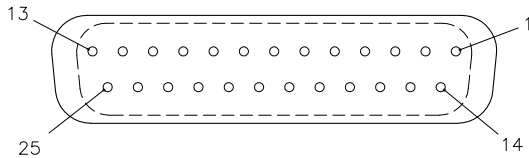

- 1 = BROWN
 - 2 = WHITE/GRAY
 - 3 = BLUE/GRAY
 - 4 = BROWN/GRAY
 - 5 = BLACK/YELLOW
 - 6 = WHITE/YELLOW
 - 7 = BLUE/YELLOW
 - 8 = BROWN/YELLOW
 - 9 = BLACK/RED
 - 10 = WHITE/RED
 - 11 = BLUE/RED
 - 12 = BROWN/RED
 - 13 = BLACK
 - 14 = WHITE
 - 15 = BLUE
 - 16 = BLACK/GRAY
 - 17 = BROWN/ORANGE
 - 18 = WHITE/ORANGE
 - 19 = BLACK/ORANGE
 - 20 = BLACK/GREEN
 - 21 = WHITE/GREEN
 - 22 = BLUE/GREEN
 - 23 = BROWN/GREEN
 - 24 = BLUE/ORANGE
 - 25 = GREEN/YELLOW
- DRAIN/SHIELD

SPECIFICATIONS

RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	25x22 AWG
DRAIN/SHIELD	22 AWG DRAIN/POLYESTER FOIL SHIELD
TEMPERATURE	-40°C TO +80°C (-40°F TO +176°F)

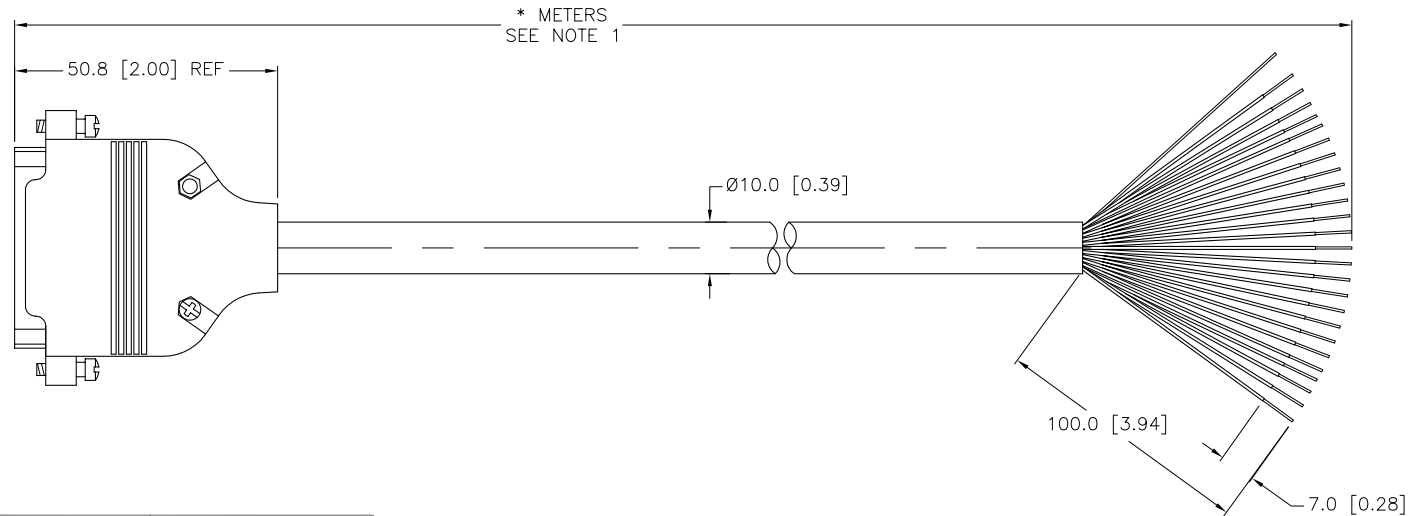

* METERS
SEE NOTE 1

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/CS12365" DESIGNATES 25x22 CABLE WITH SHIELDING. DRAIN IS NOT CONNECTED.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL SEE SPECIFICATIONS	DRFT RWC	DATE 04/30/09	DESCRIPTION DB25F-* /CS12365	
FINISH SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DSGN	SCALE 1=1.5	IDENTIFICATION NO.	
CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		REV A	
DO NOT SCALE THIS DRAWING		FILE: 777024572		SHEET 1 OF 1	

A	DRAWING RELEASE	RWC	04/30/09	
REV	DESCRIPTION	BY	DATE	ECO NO.