




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER		TAB SIZE	AWG WIRE RANGE (mm <sup>2</sup> )	HOUSING COLOR	MAX WIRE INSUL DIA	DIMENSIONS in.			
PREFIX	PK					A±.03 (.8)	B±.02 (.5)	W±.01 (.3)	X±.03 (.8)
DNFR18-250B	-C -M	.250 X .032 (6.3 X 0.8)	22-18 (0.5-1.5)	RED	.130 (3.30)	.78 (19.8)	.20 (5.1)	.36 (9.1)	.62 (15.7)
DNFR14-250B	-C -M	.250 X .032 (6.3 X 0.8)	16-14 (1.5-2.5)	BLUE	.155 (3.94)	.78 (19.8)	.20 (5.1)	.36 (9.1)	.63 (16.0)
DNFR18-205B	-C -M	.205 x .032 (5.2 x 0.8) OR .187 x .032 (4.8 x 0.8)	22-18 (0.5-1.5)	RED	.130 (3.30)	.78 (19.8)	.20 (5.1)	.36 (9.1)	.62 (15.7)
DNFR14-205B	-C -M	.205 x .032 (5.2 x 0.8) OR .187 x .032 (4.8 x 0.8)	16-14 (1.5-2.5)	BLUE	.155 (3.94)	.78 (19.8)	.20 (5.1)	.36 (9.1)	.63 (16.0)
DNFR18-206B	-C -M	.205 x .020 (5.2 x 0.5) OR .187 x .020 (4.8 x 0.5)	22-18 (0.5-1.5)	RED	.130 (3.30)	.78 (19.8)	.20 (5.1)	.36 (9.1)	.62 (15.7)
DNFR14-206B	-C -M	.205 x .020 (5.2 x 0.5) OR .187 x .020 (4.8 x 0.5)	16-14 (1.5-2.5)	BLUE	.155 (3.94)	.78 (19.8)	.20 (5.1)	.36 (9.1)	.63 (16.0)


 LISTED 20H3 E78522 WITH CT-1525 TOOL ONLY  
 CERTIFIED LR31212

NOTES:

- USED FOR:
  - A. 600V MAX VOLTAGE RATING
  - B. 221°F (105°C) MAX TEMP RATING
  - C. STRANDED COPPER WIRE ONLY
- FIRST INSERTION FORCE - 12 LB. (53N) MAX  
 FIRST WITHDRAWAL FORCE - 12 LB. (53N) MAX  
 6 LB. (27N) MIN
- INSTALLATION TOOLS:
  - A. CT-100
  - B. CT-520
  - C. CT-1525
- WIRE STRIP LENGTH: 9/32 <sup>+1/32</sup> <sub>0</sub> (7.1 <sup>+0.8</sup> <sub>0</sub>)
- MATERIAL USED:
  - A. TERMINAL STAMPING: .018 (.46) (THK) TIN PLATED BRASS
  - B. HOUSING : NYLON
- PACKAGING:
  - A. STD : -C = 100
  - B. BULK : -M = 1000
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm<sup>2</sup>

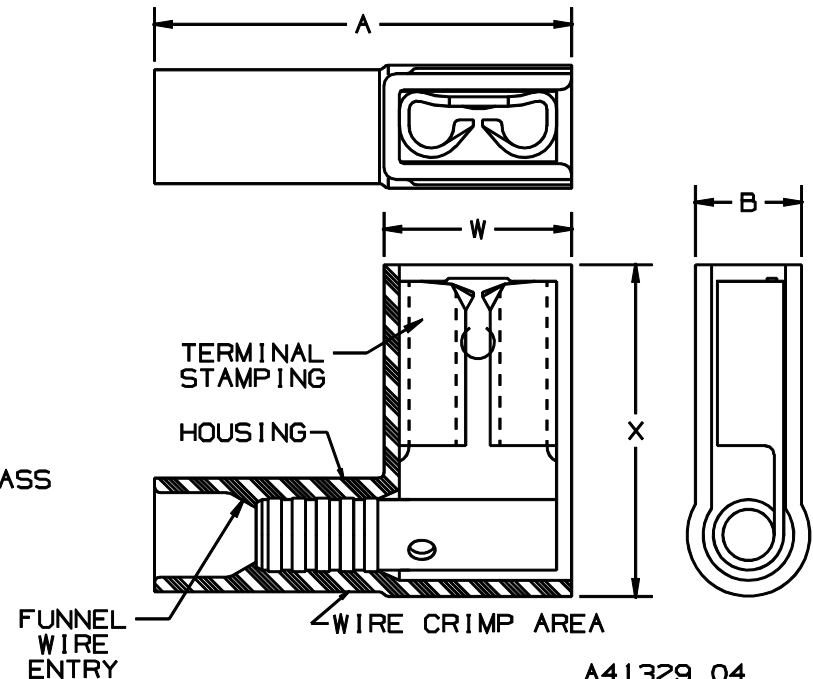

A41329\_04

04	5/98	TM		ADDED CT-1525 AND U.L. SYMBOL				 TINLEY PARK, ILLINOIS
03	8/96	JB	JW	REVISE ORIENTATION OF ALL VIEWS	04923	LA	DH	
02	11/94	TH	RLS	UPDATED NOTES AND DIMENSIONS	02670	LA	JM	
01	4/93	BK	RLS	UPDATED DRAWING	01564	LA	JM	
MOLDED NYLON INSULATED RIGHT ANGLE FEMALE DISCONNECTS, BUTTED SEAM								
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY DAW CK'D RLS SCALE NONE DRAWING NO. A41329