

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS


**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 920157

### Multilayer Ceramic Capacitors (High Capacitance)

Series: **ECJ**

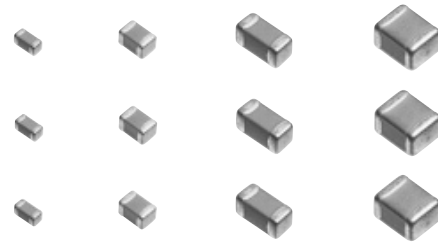

#### ■ Features

- Small size and high capacitance
- Low ESR/ESL and excellent high-frequency characteristics
- Ideal alternative to TANTALUM CHIP CAPACITORS and ALUMINUM ELECTROLYTIC CAPACITORS
- RoHS compliant

#### ■ Recommended Applications

- **Class 2 (Hi-K Type)**
  - Power supply circuitry decoupling applications
  - DC-DC converter power supply circuitry of the high-speed LSI smoothing circuit

#### ■ Handling Precautions

See Page 49 to 54


#### ■ Packaging Specifications

See Page 46, 47, 58


#### ■ Discontinued / Revised Part Numbers, Alternative Part Numbers

See Page 56, 57

#### ■ Explanation of Part Numbers

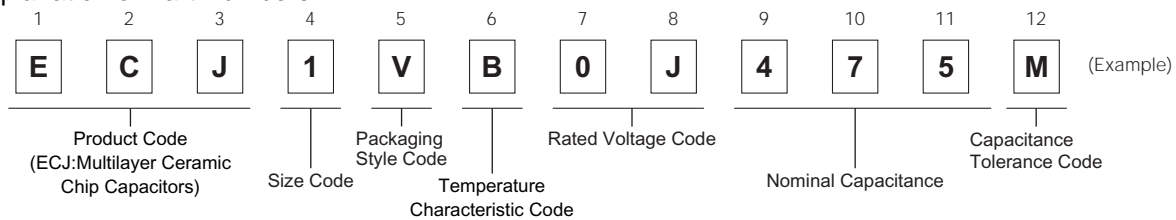


#### ■ Construction

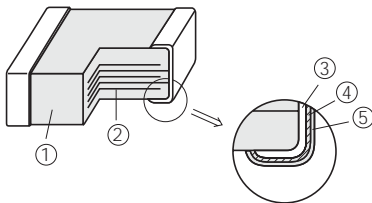

No	Name	
1	Ceramic dielectric	
2	Internal electrode	
3	Terminal electrode	Substrate electrode
4		Intermediate electrode
5		External electrode

#### ■ Dimensions in mm (not to scale)



Size Code	Size (EIA)	L	W	T	L1, L2
0	0402	1.00±0.05	0.50±0.05	0.50±0.05	0.2±0.1
1	0603	1.6±0.1	0.8±0.1	0.8±0.1	0.3±0.2
		1.60±0.15	0.80±0.15	0.80±0.15	
2	0805	2.0±0.1	1.25±0.10	0.85±0.10	0.50±0.25
		2.00±0.15	1.25±0.15	1.25±0.10	
		2.0±0.2	1.25±0.20	1.25±0.20	
G		2.00±0.15	1.25±0.15	0.85±0.10	
3	1206	3.20±0.15	1.60±0.15	0.85±0.10	0.6±0.3
				1.15±0.10	
				1.6±0.2	
D		3.2±0.2	1.6±0.2	0.85±0.10	
M				1.15±0.10	
4	1210	3.2±0.3	2.5±0.2	2.0±0.2	0.6±0.3
			2.5±0.3	2.5±0.3	
			2.5±0.2	0.85±0.10	
9					

### ■ Packaging Styles and Standard Packaging Quantity

Quantity : pcs./reel

Packaging Style Code	Packaging Styles	Size Thickness	0402	0603	0805		1206			1210		
			T=0.5	T=0.8	T=0.85	T=1.25	T=0.85	T=1.15	T=1.6	T=0.85	T=2.0	T=2.5
E	ø180 reel	Paper taping (Pitch : 2 mm)	10,000	—	—	—	—	—	—	—	—	—
V		Paper taping (Pitch : 4 mm)	—	4,000	4,000	—	4,000	—	—	—	—	—
F		Embossed taping (Pitch : 4 mm)	—	—	—	3,000	—	3,000	—	3,000	—	—
Y			—	—	—	—	—	—	2,000	—	2,000	1,000

### ■ Temperature Characteristics

#### ● Class 2

Temperature Characteristic Code	Temperature Characteristics	Capacitance Change	Measurement Temperature Range	Reference Temperature
B	B	±10 %	-25 to 85 °C	20 °C
	X7R	±15 %	-55 to 125 °C	25 °C
	X5R	±15 %	-55 to 85 °C	25 °C
F	F	+30, -80 %	-25 to 85 °C	20 °C
	Y5V	+22, -82 %	-30 to 85 °C	25 °C

For applicable "Temperature Characteristics", see the lists of standard products on page 6 to 7.

### ■ Rated Voltage

Code	1H	1E	1C	1A	0J
Rated Voltage	DC 50 V	DC 25 V	DC 16 V	DC 10 V	DC 6.3 V




### ■ Nominal Capacitance

Ex.	105	225	106	226
Nominal Capacitance	1,000,000 pF (1 µF)	2,200,000 pF (2.2 µF)	10,000,000 pF (10 µF)	22,000,000 pF (22 µF)

### ■ Capacitance Tolerance

Class	Temperature Characteristics	Capacitance Tolerance Code	Capacitance Tolerance
2	B, X7R, X5R	K	±10 %
		M	±20 %
	F, Y5V	Z	+80, -20 %

### ■ Specification and Test Method

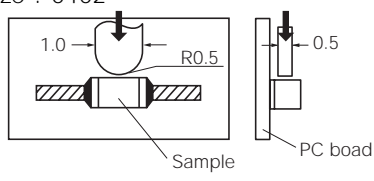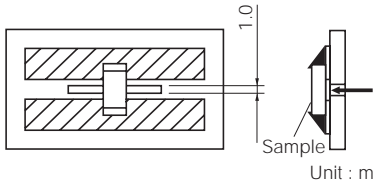Item	Specification	Test Method																														
Operating Temperature Range	Temp. Char. B, X7R : -55 to 125 °C Temp. Char. B, X5R : -55 to 85 °C Temp. Char. F, Y5V : -30 to 85 °C	—————																														
Dielectric Withstanding Voltage	No dielectric breakdown and/or damage	Test voltage : Rated voltage x250 % Duration:1 to 5 s. Charge / Discharge current: 50 mA max.																														
Insulation Resistance (I.R.)	500/C (MΩ) min. Note : 100/C(MΩ)min. for DC 10 V max. C : Nominal Cap. in μF	Measuring voltage : Rated voltage Duration : 60±5 s Charge / Discharge current: 50 mA max.																														
Capacitance	within the specified tolerance	Measuring temperature: 20±2 °C Preconditioning: The capacitors shall be kept in temperature of 150 +0/-10 °C for 1 hour and subject to standard condition* 48±4 hours before initial measurement.																														
Dissipation Factor (tan δ)	0.2 max. Please see the technical specifications for details.																															
		<table border="1"> <thead> <tr> <th>Nominal capacitance</th> <th>C&lt;10 μF</th> <th>C&gt;10 μF</th> </tr> </thead> <tbody> <tr> <td>Measuring frequency</td> <td>1 kHz±10 %</td> <td>120 Hz±20 %</td> </tr> <tr> <td>Measuring voltage</td> <td>1.0±0.2 Vrms</td> <td>0.5±0.2 Vrms</td> </tr> </tbody> </table>	Nominal capacitance	C<10 μF	C>10 μF	Measuring frequency	1 kHz±10 %	120 Hz±20 %	Measuring voltage	1.0±0.2 Vrms	0.5±0.2 Vrms																					
Nominal capacitance	C<10 μF	C>10 μF																														
Measuring frequency	1 kHz±10 %	120 Hz±20 %																														
Measuring voltage	1.0±0.2 Vrms	0.5±0.2 Vrms																														
Temperature Characteristics	Temperature Characteristics B : ±10 % X7R : ±15 % X5R : ±15 % F : +30, -80 % Y5V : +22, -82 %	<p>Maximum capacitance change at stages 1 to 5</p> <table border="1"> <thead> <tr> <th>Temp. Char.</th> <th>B, F</th> <th>X7R</th> <th>X5R</th> <th>Y5V</th> </tr> </thead> <tbody> <tr> <td>Stage 1</td> <td>20 °C</td> <td>25 °C</td> <td>25 °C</td> <td>25 °C</td> </tr> <tr> <td>Stage 2</td> <td>-25 °C</td> <td>-55 °C</td> <td>-55 °C</td> <td>-30 °C</td> </tr> <tr> <td>Stage 3 (Ref. Temp.)</td> <td>20 °C</td> <td>25 °C</td> <td>25 °C</td> <td>25 °C</td> </tr> <tr> <td>Stage 4</td> <td>85 °C</td> <td>125 °C</td> <td>85 °C</td> <td>85 °C</td> </tr> <tr> <td>Stage 5</td> <td>20 °C</td> <td>25 °C</td> <td>25 °C</td> <td>25 °C</td> </tr> </tbody> </table> <p>See the technical specifications for details such as measuring voltage.</p>	Temp. Char.	B, F	X7R	X5R	Y5V	Stage 1	20 °C	25 °C	25 °C	25 °C	Stage 2	-25 °C	-55 °C	-55 °C	-30 °C	Stage 3 (Ref. Temp.)	20 °C	25 °C	25 °C	25 °C	Stage 4	85 °C	125 °C	85 °C	85 °C	Stage 5	20 °C	25 °C	25 °C	25 °C
Temp. Char.	B, F	X7R	X5R	Y5V																												
Stage 1	20 °C	25 °C	25 °C	25 °C																												
Stage 2	-25 °C	-55 °C	-55 °C	-30 °C																												
Stage 3 (Ref. Temp.)	20 °C	25 °C	25 °C	25 °C																												
Stage 4	85 °C	125 °C	85 °C	85 °C																												
Stage 5	20 °C	25 °C	25 °C	25 °C																												
Adhesion	Terminal electrodes shall be free from peeling or signs of peeling.	<p>Applied force : 5 N Duration : 10 s Size : 0402</p>  <p>Size : 0603 to 1210</p>  <p>Unit : mm</p>																														
Bending Strength	Appearance: No mechanical damage Capacitance change: Temp. Char. B, X7R, X5R: within ±12.5 % F, Y5V: within ±30 %	<p>Bending value :1 mm Bending speed : 1 mm/s</p>  <p>Unit : mm</p>																														
Vibration Proof	Appearance : No mechanical damage. Capacitance : Within the specified tolerance tanδ : Initial standard value	<p>Total amplitude : 1.5 mm Vibration frequency : 10 to 55 to 10 Hz for 1 min 3 perpendicular directions for 2 hours each, a total of 6 hours</p>																														

\*Standard condition : Temperature 15 to 35 °C, Relative humidity 45 to 75 %

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Item	Specification	Test Method												
Resistance to Soldering Heat	Appearance : No mechanical damage Capacitance change : Temp. Char. B, X7R, X5R : within $\pm 7.5$ % F, Y5V : within $\pm 20$ % $\tan\delta$ : Initial standard value IR : Initial standard value Withstand voltage : No dielectric breakdown or damage	Soldering bath method Preconditioning : Heat treatment <sup>(*)</sup> Solder temperature : $270 \pm 5$ °C Dipping period : $3.0 \pm 0.5$ s Preheat condition : <table border="1"> <thead> <tr> <th>Order</th> <th>Temp. (°C)</th> <th>Size 0805 max.</th> <th>Size 1206 min.</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>80 to 100</td> <td>120 to 180s</td> <td>300 to 360s</td> </tr> <tr> <td>2</td> <td>150 to 200</td> <td>120 to 180s</td> <td>300 to 360s</td> </tr> </tbody> </table> Recovery (Standard condition) : $48 \pm 4$ h	Order	Temp. (°C)	Size 0805 max.	Size 1206 min.	1	80 to 100	120 to 180s	300 to 360s	2	150 to 200	120 to 180s	300 to 360s
Order	Temp. (°C)	Size 0805 max.	Size 1206 min.											
1	80 to 100	120 to 180s	300 to 360s											
2	150 to 200	120 to 180s	300 to 360s											
Solderability	More than 95 % of the soldered area of both terminal electrodes shall be covered with fresh solder.	Soldering bath method Solder temperature : $230 \pm 5$ °C Dipping period : $4 \pm 1$ s Solder : H63A (JIS-Z-3282)												
Temperature Cycle	Appearance : No mechanical damage Capacitance change : Temp. Char. B, X7R, X5R : within $\pm 7.5$ % F, Y5V : within $\pm 20$ % $\tan\delta$ : Initial standard value IR : Initial standard value Withstand voltage : No dielectric breakdown and/or damage	Preconditioning : Heat treatment <sup>(*)</sup> Step 1: Minimum operating temp. $30 \pm 3$ min Step 2: Room temp. 3 min max. Step 3: Maximum operating temp. $30 \pm 3$ min Step 4: Room temp. 3 min max. Number of cycles : 5 cycles Recovery(Standard condition) : $48 \pm 4$ h												
Damp Heat (steady state)	Appearance : No mechanical damage Capacitance change : Temp. Char. B, X7R, X5R : within $\pm 20$ % F, Y5V : within $\pm 30$ % $\tan\delta$ : Temp. Char. B, X7R, X5R : 0.25 max. F, Y5V : 0.3 max. IR : $50/C$ (M $\Omega$ ) min. Note : $10/C$ (M $\Omega$ ) min. for rated vol. DC 10 V max. C:Nominal cap. in $\mu$ F Please see the technical specifications for details.	Preconditioning : Heat treatment <sup>(*)</sup> Temperature : $40 \pm 2$ °C Relative humidity : 90 to 95 % Test period : 500+24/0 h Recovery(Standard condition) : $48 \pm 4$ h												
Damp Heat Load	Appearance : No mechanical damage Capacitance change : Temp. Char. B, X7R, X5R : within $\pm 20$ % F, Y5V : within $\pm 30$ % $\tan\delta$ : Temp. Char. B, X7R, X5R : 0.25 max. F, Y5V : 0.3 max. IR : $25/C$ (M $\Omega$ ) min. Note : $5/C$ (M $\Omega$ ) min. for rated vol. DC 10 V max. C:Nominal cap. in $\mu$ F Please see the technical specifications for details.	Preconditioning : Voltage treatment <sup>(*)</sup> Temperature : $40 \pm 2$ °C Relative humidity : 90 to 95 % Applied voltage : Rated voltage Charge/discharge current : 50 mA max. Test period : 500+24/0 h Recovery(Standard condition) : $48 \pm 4$ h												
High Temperature Load	Appearance : no mechanical damage Capacitance change : Temp. Char. B, X7R, X5R : within $\pm 20$ % F, Y5V : within $\pm 30$ % $\tan\delta$ : Temp. Char. B, X7R, X5R : 0.25 max. F, Y5V : 0.3 max. IR : $50/C$ (M $\Omega$ ) min. Note : $10/C$ (M $\Omega$ ) min. for rated vol. DC 10 V max. C:Nominal cap. in $\mu$ F Please see the technical specifications for details.	Preconditioning : Voltage treatment <sup>(*)</sup> Temperature : Maximum operation temp. $\pm 3$ °C Applied voltage : (1)Rated voltage $\times 200$ % (2)Rated voltage $\times 150$ % (3)Rated voltage $\times 100$ % Please see the technical specifications for details. Charge/discharge current : 50 mA max. Test period : 1000+48/0 h Recovery (Standard condition) : $48 \pm 4$ h												

(\*1) Heat treatment : 1 h of heat treatment at  $150 \pm 0/-10$  °C followed by  $48 \pm 4$  h recovery under the standard condition.

(\*2) Voltage treatment : 1 h of voltage treatment under the specified temperature and voltage for testing followed by  $48 \pm 4$  h of recovery under the standard condition.

### ■ Standard Products for EIA Size "0402", Taped Version

#### ● Class 2

##### ◆ Temperature Characteristic Code : B (Temperature Characteristics : X5R)

Rated Voltage		DC 10 V			DC 6.3 V		
Capacitance (μF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.
				X5R			X5R
1	±10 %(K)	ECJ0EB1A105M	0.5	○	ECJ0EB0J105□	0.5	○
2.2	or ±20 %(M)				ECJ0EB0J225M	0.5	○

□ : Capacitance tolerance code.

Standard packaging quantity of Packaging Style Code "E" (T = 0.5 mm) : 10,000 pcs./reel.

Recommend soldering method : Reflow soldering.

##### ◆ Temperature Characteristic Code : F (Temperature Characteristics : F, Y5V)

Rated Voltage		DC 6.3 V		
Capacitance (μF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.
				F Y5V
1	+80, -20 %(Z)	ECJ0EF0J105Z	0.5	○ ○

Standard packaging quantity of Packaging Style Code "E" (T = 0.5 mm) : 10,000 pcs./reel.

Recommend soldering method : Reflow soldering.

### ■ Standard Products for EIA Size "0603", Taped Version

#### ● Class 2

##### ◆ Temperature Characteristic Code : B (Temperature Characteristics : X5R)

Rated Voltage		DC 25 V			DC 16 V			DC 10 V			DC 6.3 V		
Capacitance (μF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.
				X5R			X5R			X5R			
1	±10 %(K) or ±20 %(M)	ECJ1VB1E105□	0.8	○	ECJ1VB1C105□	0.8	○	ECJ1VB1A105□	0.8	○	ECJ1VB0J105□	0.8	○
2.2								ECJ1VB1A225□	0.8	○	ECJ1VB0J225□	0.8	○
4.7											ECJ1VB0J475□	0.8	○
10											ECJ1VB0J106M	0.8*	○

□ : Capacitance tolerance code.

Dimensional tolerance of L, W, T : ±0.1 mm for no mark, ±0.15 mm for "\*" mark.

Standard packaging quantity of Packaging Style Code "V" (T = 0.8 mm) : 4,000 pcs./reel.

Recommend soldering method : Reflow soldering.

##### ◆ Temperature Characteristic Code : F (Temperature Characteristics : F, Y5V)

Rated Voltage		DC 25 V			DC 16 V			DC 10 V			DC 6.3 V		
Capacitance (μF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.
				F			F			F Y5V			
1	+80,	ECJ1VF1E105Z	0.8	○	ECJ1VF1C105Z	0.8	○	ECJ1VF1A105Z	0.8	○ ○			
2.2	-20 %(Z)							ECJ1VF1A225Z	0.8	○ ○	ECJ1VF0J225Z	0.8	○ ○

Standard packaging quantity of Packaging Style Code "V" (T = 0.8 mm) : 4,000 pcs./reel.

Recommend soldering method : Reflow soldering.

### ■ Standard Products for EIA Size "0805", Taped Version

#### ● Class 2

##### ◆ Temperature Characteristic Code : B (Temperature Characteristics : B, X5R)

Rated Voltage		DC 25 V			DC 16 V			DC 10 V			DC 6.3 V		
Capacitance (μF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.
				X5R			X5R			B X5R			
1	±10 %(K) or ±20 %(M)	ECJ2FB1E105□	1.25*	○	ECJ2FB1C105□	1.25*	○	ECJ2FB1A105□	1.25	○ ○			
2.2		ECJ2FB1E225□	1.25*	○	ECJ2FB1C225□	1.25*	○	ECJ2FB1A225□	1.25*	— ○	ECJ2FB0J225□	1.25	○
4.7		ECJ2FB1E475□	1.25*	○	ECJ2FB1C475□	1.25*	○	ECJ2FB1A475□	1.25*	— ○	ECJ2FB0J475□	1.25*	○
10								ECJ2FB1A106□	1.25**	— ○	ECJ2FB0J106□	1.25**	○
22											ECJ2FB0J226M	1.25**	○

□ : Capacitance tolerance code.

Dimensional tolerance of L, W, T : L, W : ±0.15 mm / T : ±0.1 mm for no mark, ±0.15 mm for "\*" mark, ±0.2 mm for "\*\*" mark.

Standard packaging quantity of Packaging Style Code "F" (T = 1.25 mm) : 3,000 pcs./reel.

Avoid flow soldering.

##### ◆ Temperature Characteristic Code : F (Temperature Characteristics : F, Y5V)

Rated Voltage		DC 50 V			DC 25 V			DC 16 V			DC 10 V		
Capacitance (μF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.
				F			F			F Y5V			
1	+80, -20 %(Z)	ECJ2FF1H105Z	1.25*	○	ECJ2FF1E105Z	1.25*	○	ECJ2VF1C105Z	0.85	○ ○			
2.2					ECJ2FF1E225Z	1.25*	○	ECJGVF1C225Z	0.85	○ ○			
4.7								ECJGVF1C475Z	0.85	○ ○	ECJGVF1A475Z	0.85	○ ○
10											ECJ2FF1A106Z	1.25*	○ ○

Dimensional tolerance of L, W, T : L, W : ±0.15 mm / T : ±0.1 mm for no mark, ±0.15 mm for "\*" mark.

Standard packaging quantity of Packaging Style Code "V" (T = 0.85 mm) : 4,000 pcs./reel, "F" (T = 1.25 mm) : 3,000 pcs./reel.

Soldering method of dimension T > 1 mm : Avoid flow soldering.

### ■ Standard Products for EIA Size "1206", Taped Version

#### ● Class 2

#### ◆ Temperature Characteristic Code : B (Temperature Characteristics : B, X7R, X5R)

Rated Voltage	DC 25 V				DC 16 V				DC 10 V				DC 6.3 V			
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.
B X7R X5R				B X7R X5R			B X5R			X5R						
1	±10 % (K) or ±20 % (M)	ECJ3YB1E105□	1.6	○ ○ ○	ECJ3FB1C105□	1.15*	○ ○ ○									
2.2		ECJ3YB1E225□	1.6	— — ○	ECJ3YB1C225□	1.6	○ ○ ○	ECJ3YB1A225□	1.6	○ ○ ○						
4.7		ECJ3YB1E475□	1.6	— — ○	ECJ3YB1C475□	1.6	— — ○	ECJ3YB1A475□	1.6	— — ○	ECJ3YB0J475□	1.6	○ ○ ○			
10		ECJ3YB1E106□	1.6	— — ○	ECJ3YB1C106□	1.6	— — ○	ECJ3YB1A106□	1.6	— — ○	ECJDV50J106M	0.85**	○ ○ ○			
22											ECJDV50J226M	0.85**	○ ○ ○			

□ : Capacitance tolerance code.

Dimensional tolerance of L, W, T: ±0.2 mm for no mark, L, W: ±0.15 mm / T: ±0.1 mm for "\*" mark, L, W: ±0.2 mm / T: ±0.1 mm for "\*\*" mark.

Standard packaging quantity of Packaging Style Code "V" (T = 0.85 mm) : 4,000 pcs./reel, "F" (T = 1.15 mm) : 3,000 pcs./reel, "Y" (T = 1.6 mm) : 2,000 pcs./reel

Avoid flow soldering.

#### ◆ Temperature Characteristic Code : F (Temperature Characteristics : F, Y5V)

Rated Voltage	DC 50 V				DC 25 V				DC 16 V				DC 10 V			
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.
F				F Y5V			F Y5V			F Y5V						
1	+80, -20 % (Z)	ECJ3FF1H105Z	1.15*	○ ○ ○	ECJ3FF1E105Z	1.15*	○ ○ ○	ECJ3VF1C105Z	0.85*	○ ○ ○						
2.2					ECJ3FF1E225Z	1.15*	○ ○ ○	ECJ3VF1C225Z	0.85*	○ ○ ○						
4.7					ECJ3FF1E475Z	1.15*	○ ○ ○	ECJ3FF1C475Z	1.15*	○ ○ ○						
10					ECJ3YF1E106Z	1.60	○ ○ ○	ECJMFF1C106Z	1.15**	○ ○ ○	ECJMFF1A106Z	1.15**	○ ○ ○			
22											ECJMFF1A226Z	1.15**	○ ○ ○			

Dimensional tolerance of L, W, T: ±0.2 mm for no mark, L, W: ±0.15 mm / T: ±0.1 mm for "\*" mark, L, W: ±0.2 mm / T: ±0.1 mm for "\*\*" mark.

Standard packaging quantity of Packaging Style Code "V" (T = 0.85 mm) : 4,000 pcs./reel, "F" (T = 1.15 mm) : 3,000 pcs./reel, "Y" (T = 1.6 mm) : 2,000 pcs./reel

Soldering method of dimension T > 1 mm: Avoid flow soldering.

### ■ Standard Products for EIA Size "1210", Taped Version

#### ● Class 2 Capacitors

#### ◆ Temperature Characteristic Code : B (Temperature Characteristics : X5R)

Rated Voltage	DC 50 V				DC 25 V				DC 16 V				DC 10 V				DC 6.3 V			
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	
X5R				X5R			X5R			X5R										
1	±10 % (K) or ±20 % (M)	ECJ4YB1H105□	2.0	○ ○ ○																
2.2					ECJ4YB1E225□	2.0*	○ ○ ○													
4.7					ECJ4YB1E475□	2.0*	○ ○ ○	ECJ4YB1C475□	2.0*	○ ○ ○										
10					ECJ4YB1E106M	2.5	○ ○ ○	ECJ4YB1C106M	2.0*	○ ○ ○	ECJ4YB1A106□	2.0*	○ ○ ○							
22					ECJ4YB1E226M	2.5	○ ○ ○	ECJ4YB1C226M	2.5	○ ○ ○	ECJ4YB1A226M	2.5	○ ○ ○	ECJ4YB0J226M	2.5	○ ○ ○				

□ : Capacitance tolerance code.

Dimensional tolerance of L, W, T: ±0.3 mm for no mark, L: ±0.3 mm / W, T: ±0.2 mm for "\*" mark.

Standard packaging quantity of Packaging Style Code "Y" (T = 2.0 mm) : 2,000 pcs./reel, "Y" (T = 2.5 mm) : 1,000 pcs./reel

Avoid flow soldering.

#### ◆ Temperature Characteristic Code : F (Temperature Characteristics : F, Y5V)

Rated Voltage	DC 50 V				DC 25 V				DC 16 V				DC 10 V			
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.	Part No.	Dim. T (mm)	Temp. Char.
F				F Y5V			F			F Y5V						
4.7	+80, -20 % (Z)	ECJ4YF1H475Z	2.0*	○ ○ ○	ECJ4YF1E475Z	2.0*	○ ○ ○									
10		ECJ4YF1H106Z	2.0*	○ ○ ○	ECJ4YF1E106Z	2.0*	○ ○ ○	ECJ4YF1C106Z	2.0*	○ ○ ○						
22					ECJ4YF1E226Z	2.0*	○ ○ ○	ECJ4YF1C226Z	2.0*	○ ○ ○	ECJ9FF1A226Z	0.85**	○ ○ ○			

Dimensional tolerance of L, W, T: L: ±0.3 mm / W, T: ±0.2 mm for no mark, L, W: ±0.3 mm / T: ±0.1 mm for "\*\*" mark.

Standard packaging quantity of Packaging Style Code "F" (T = 0.85 mm) : 3,000 pcs./reel, "Y" (T = 2.0 mm) : 2,000 pcs./reel.

Avoid flow soldering.