


Aluminum Electrolytic, 85C, EDK, 220 uF, 20%, 10 V, -40/+85C

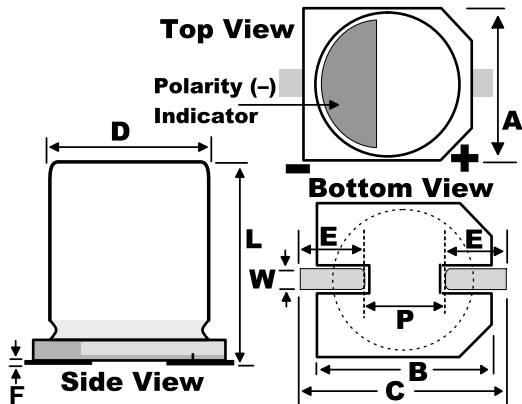

| Dimensions | |
|------------|-----------------|
| D | 6.3mm +/-0.5mm |
| L | 7.7mm +/-0.3mm |
| W | 0.65mm +/-0.1mm |
| F | 0.3mm MAX |
| A | 6.6mm +/-0.2mm |
| B | 6.6mm +/-0.2mm |
| C | 7.8mm MAX |
| E | 2.6mm +/-0.2mm |
| P | 1.8mm +/-0.2mm |

| Packaging Specifications | |
|--------------------------|------------|
| Packaging: | T&R, 380mm |
| Packaging Quantity: | 1000 |

| General Information | |
|---------------------|--------------------------------------|
| Dielectric: | Aluminum Electrolytic |
| Style: | SMD Can |
| Series: | EDK |
| Description: | Surface Mount, Aluminum Electrolytic |
| RoHS: | Yes |
| Lead: | V-Chip |

| Specifications | |
|--------------------------|--|
| Capacitance: | 220 uF |
| Capacitance Tolerance: | 20% |
| Voltage DC: | 10 VDC, 13 VDC (Surge) |
| Temperature Range: | -40/+85C |
| Rated Temperature: | 85C |
| Life: | 2000 Hrs |
| Dissipation Factor: | 26% |
| Current: | 250 mAmps (120Hz), 340 mAmps (120Hz 50C) |
| Leakage: | 22 uAmps (2min 20C) |
| Impedance Ratio at -25C: | 3 |
| Impedance Ratio at -40C: | 6 |
| High Temperature Solder: | No |