


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR	MAX. WIRE INSULATION DIA.	DIMENSIONS in. [mm]		
					L ± .03 [0,8]	W ± .01 [0,3]	H ± .02 [0,5]
EDV18-188B	#22-18 [0,5-1,0]	.187 X .020 [4,8 X 0,5]	RED	.136 [3,45]	.79 [20,1]	.23 [5,8]	.10 [2,5]
EDV14-188B*	#16-14 [1,5-2,5]	.187 X .020 [4,8 X 0,5]	BLUE	.162 [4,11]	.79 [20,1]	.23 [5,8]	.10 [2,5]



*UL RECOGNIZED ONLY

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
 - A. STRANDED COPPER WIRE ONLY
 - B. 221°F (105°C) MAX TEMP RATING
 - C. 600V MAX VOLTAGE
2. MATERIAL:
 - A. STAMPING: .016" (0.41) THK BRASS, TIN PLATED
 - B. HOUSING: VINYL
3. INSTALLATION TOOLS:
 - A. UL LISTED AND CSA CERTIFIED: CT-520, CT-1525
 - B. UL RECOGNIZED: CT-520, CT-1525
4. WIRE STRIP LENGTH 1/4" ^{+1/32}₋₀ [6.3mm ^{+0.8}₋₀]
5. FIRST INSERTION FORCE: 12 LB (53N) MAX
FIRST WITHDRAWAL FORCE: 12 LB (53N) MAX
6 LB (27N) MIN
6. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
INDICATED BY PART NUMBER SUFFIX
7. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

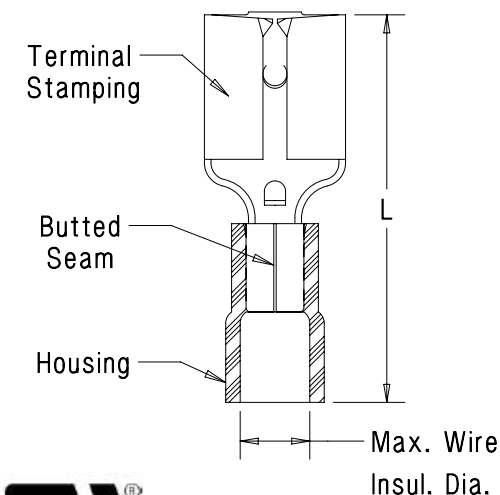

LISTED
20H3
E78522



CERTIFIED
LR31212



RECOGNIZED
E78522

TITLE STRONGHOLD FEMALE DISCONNECT (188 SERIES) VINYL INSULATED, BUTTED SEAM #22-14 AWG			
CUSTOMER DRAWING			
ITEM REVISION NAME		00123STL/00	
DATASET FILE NAME		00123STL/00	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		PANDUIT MATERIAL: SEE NOTES	
THIRD ANGLE PROJECTION		DRAWING NUMBER: SH41554	
DRAWN BY	DATE	CHK	SCALE
JHNU	2/18	TMR	NTS
SHT 1 OF 1			SIZE A

00	2/18	JHNU	TMR	RGB	RELEASED		00123SH
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	