



PHANTOM ELITE®

VHF Antennas

The Phantom Elite® patented technology is beneficial when high performance is desired and extreme ruggedness and low profile is required. Measuring only 2.4 inches tall, the Phantom Elite VHF antenna models' revolutionary design features field diversity with both vertical and horizontal polarization components. This gives the antenna diversity, frequency agility, low visibility, wide bandwidth and a low angle radiation pattern that is superior to traditional gain antennas in most applications.

FEATURES


- Cross polarization design ensures uninterrupted transmissions in urban canyons and rural drop-off areas
- Phantom® outperforms a whip in many applications
- U.S. Patent Nos. 5,977,931 – 6,292,156 and 7,209,096

APPLICATIONS

- Public safety
- Transportation
- Utility
- Military mobile
- Fixed radio applications

MODEL	DESCRIPTION	FREQ. RANGE	GAIN	COLOR	RADOME HEIGHT	MAX
ETRA1440	Phantom Elite VHF Antenna	144-148 MHz	Unity	Black	6.0325 cm (2.375 in.)	60 W
ETRA1500	Phantom Elite VHF Antenna	150-155 MHz	Unity	White	6.0325 cm (2.375 in.)	60 W
ETRA1500	Phantom Elite VHF Antenna	150-155 MHz	Unity	Black	6.0325 cm (2.375 in.)	60 W
ETRA1550	Phantom Elite VHF Antenna	155-160 MHz	Unity	White	6.0325 cm (2.375 in.)	60 W
ETRA1550	Phantom Elite VHF Antenna	155-160 MHz	Unity	Black	6.0325 cm (2.375 in.)	60 W
ETRA1650	Phantom Elite VHF Antenna	165-170 MHz	Unity	Black	6.0325 cm (2.375 in.)	60 W

ANTENNA PATTERN

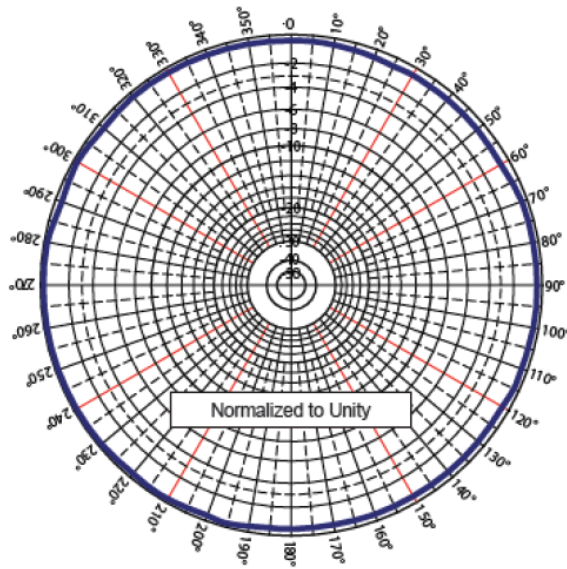

Azimuth Pattern, (X, Y or E-Plane)

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original