


ANGELINA-W

~50° wide beam


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 82 mm
Height	31 mm
Fastening	
Colour	metal
Box size	480 x 280 x 300 mm
Box weight	11.3 kg
Quantity in Box	900 pcs
ROHS compliant	yes ⓘ








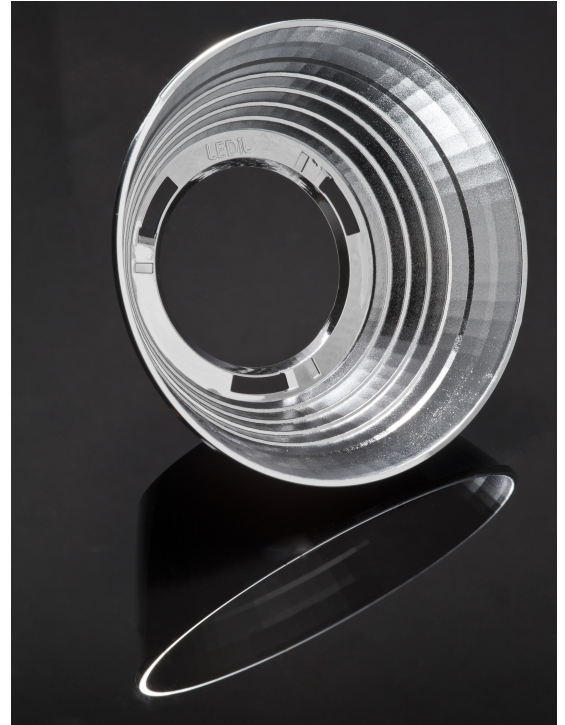


MATERIAL SPECIFICATIONS:









Component	Type	Material	Colour	Coating
ANGELINA-W	Reflector	PC	metal	HMDS

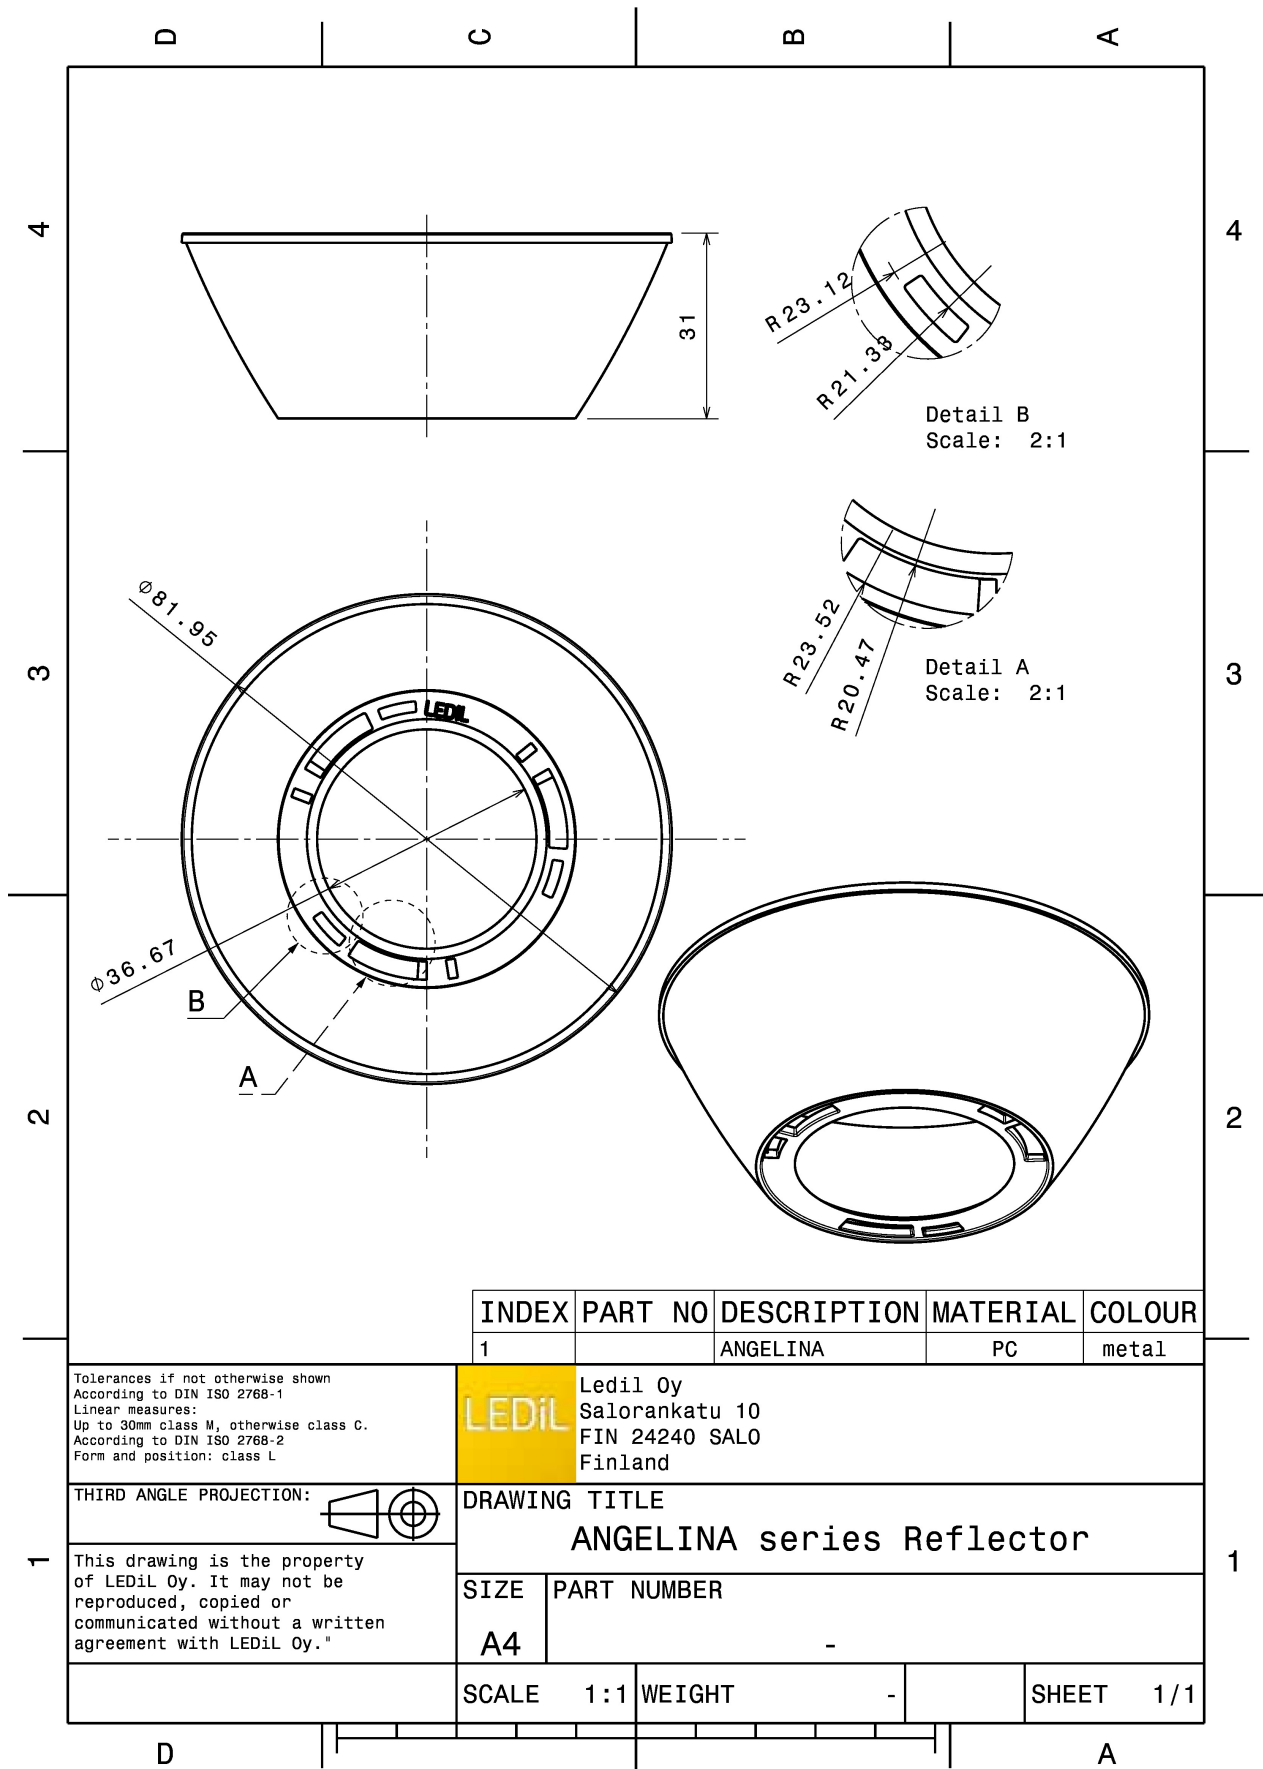


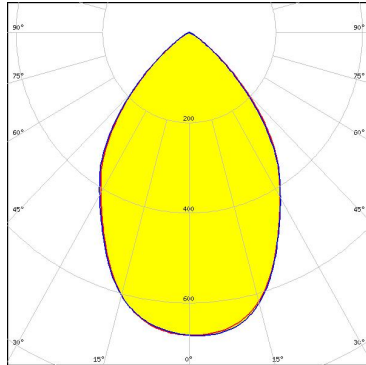
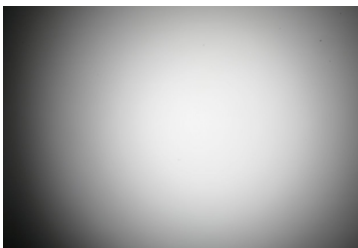
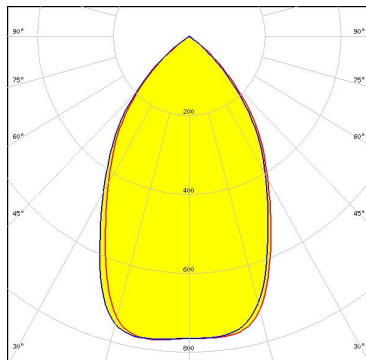

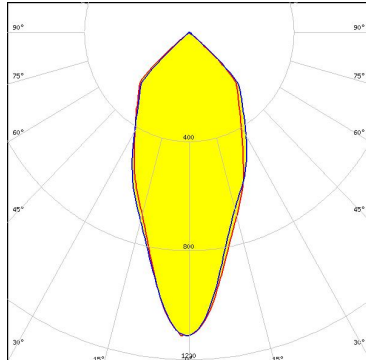
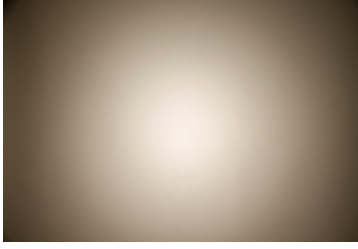
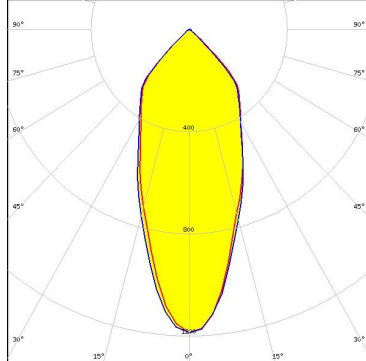
PHOTOMETRIC DATA (MEASURED):
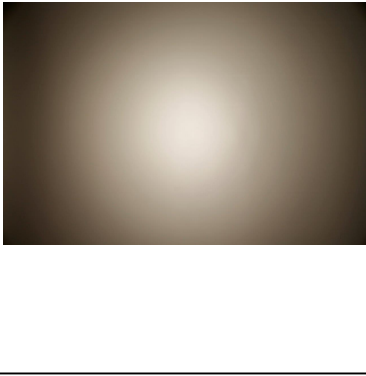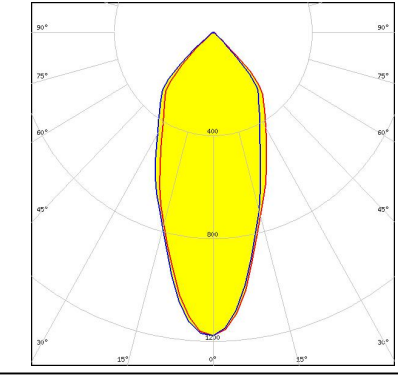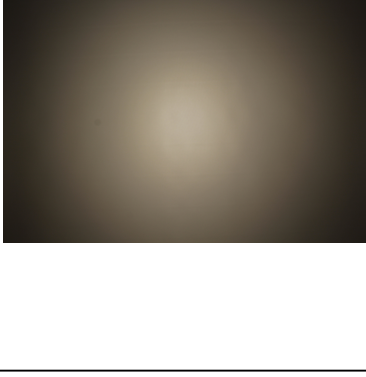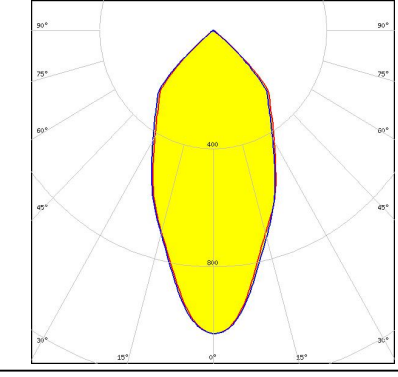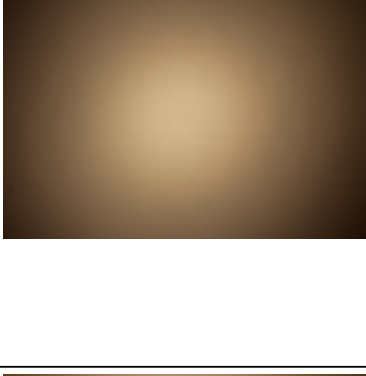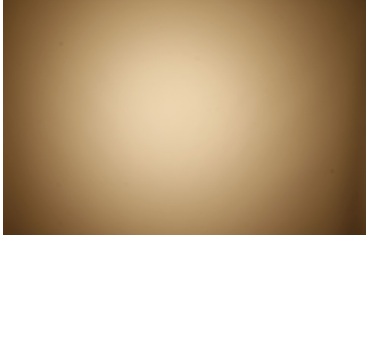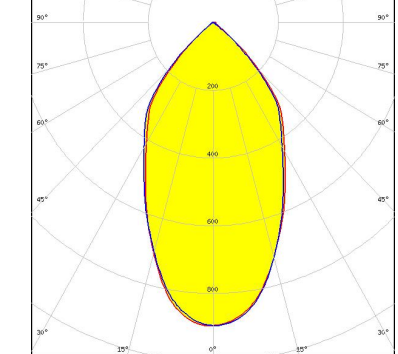
<p>bridgelux.</p> <p>LED BXRA ES Rectangle</p> <p>FWHM 43.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 1.210 cd/lm</p> <p>Required components: IDEAL: 50-2100BL + 50-2100AN</p>		
<p>bridgelux.</p> <p>LED V13 Gen7</p> <p>FWHM 50.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 1.000 cd/lm</p> <p>Required components: TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1</p>		
<p>bridgelux.</p> <p>LED V15 Gen6</p> <p>FWHM 51.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 1.100 cd/lm</p> <p>Required components: C13658_CLAMP-VERO13-18 Bender Wirth: 456 Typ L2</p>		
<p>bridgelux.</p> <p>LED V22 Gen6</p> <p>FWHM 57.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.900 cd/lm</p> <p>Required components: IDEAL: 50-2204-CT + 50-2100AN</p>		

PHOTOMETRIC DATA (MEASURED):
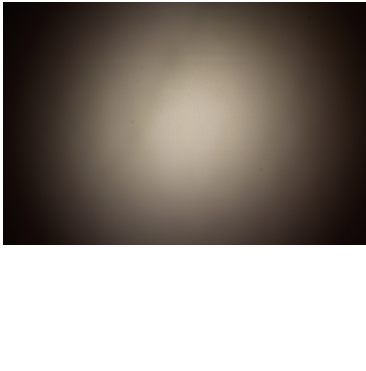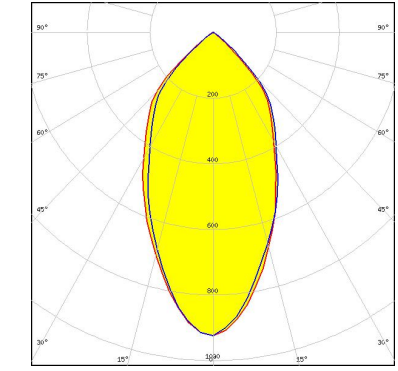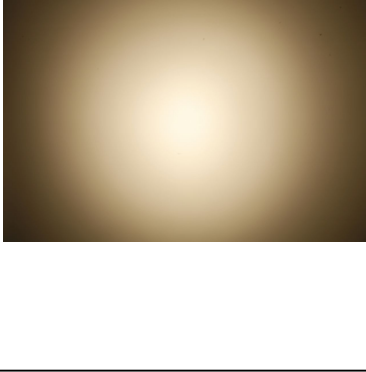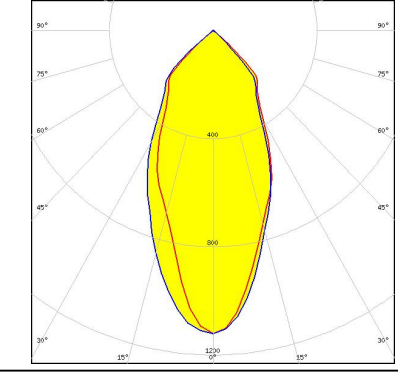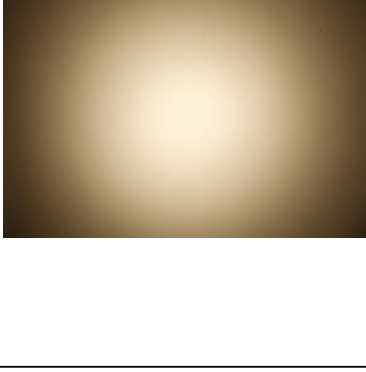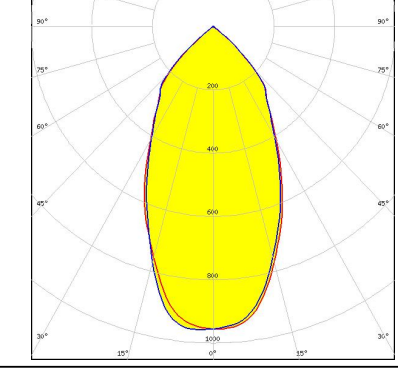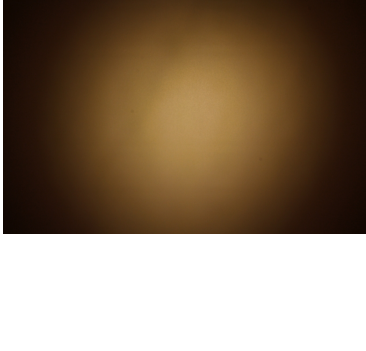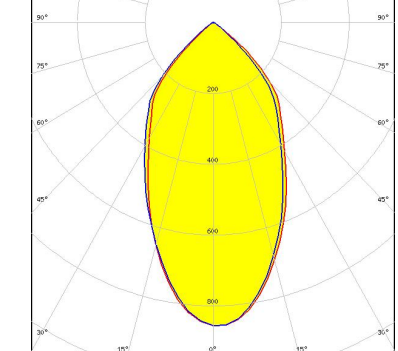
<p>bridgelux.</p> <p>LED VERO13</p> <p>FWHM 53.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 0.930 cd/lm</p> <p>Required components: C13658_CLAMP-VERO13-18 F13671_ANGE-RZ-LENS</p>		
<p>bridgelux.</p> <p>LED VERO13</p> <p>FWHM 49.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 1.100 cd/lm</p> <p>Required components: C13658_CLAMP-VERO13-18 LEDiL: LEDiL</p>		
<p>bridgelux.</p> <p>LED VERO18</p> <p>FWHM 55.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 1.000 cd/lm</p> <p>Required components: C13658_CLAMP-VERO13-18 LEDiL: LEDiL</p>		
<p>bridgelux.</p> <p>LED VERO18</p> <p>FWHM 56.0°</p> <p>Efficiency 90 %</p> <p>Peak intensity 0.860 cd/lm</p> <p>Required components: C13658_CLAMP-VERO13-18 F13671_ANGE-RZ-LENS</p>		

PHOTOMETRIC DATA (MEASURED):

<p>bridgelux.</p> <p>LED VERO29</p> <p>FWHM 73.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 0.670 cd/lm</p> <p>Required components: C13584_CLAMP-VERO29 F13671_ANGE-RZ-LENS</p>		
<p>bridgelux.</p> <p>LED VERO29</p> <p>FWHM 64.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 0.800 cd/lm</p> <p>Required components: C13584_CLAMP-VERO29 LEDiL: LEDiL</p>		
<h3>CITIZEN</h3> <p>LED CLL02x/CLU02x (LES10)</p> <p>FWHM 45.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 1.100 cd/lm</p> <p>Required components: C13658_CLAMP-VERO13-18 Bender Wirth: 434 Typ L1</p>		
<h3>CITIZEN</h3> <p>LED CLL03x/CLU03x</p> <p>FWHM 43.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 1.190 cd/lm</p> <p>Required components: IDEAL: 50-2103CT + 50-2100AN</p>		

PHOTOMETRIC DATA (MEASURED):

CITIZEN

LED CLL03x/CLU03x



FWHM 48.0°

Efficiency 94 %

Peak intensity 1.090 cd/lm

Required components:

TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1

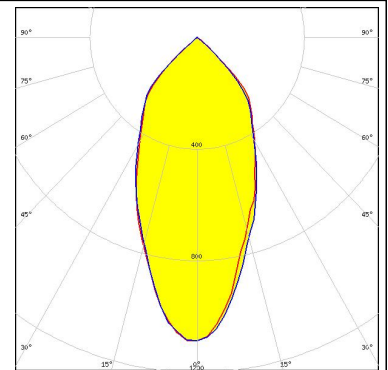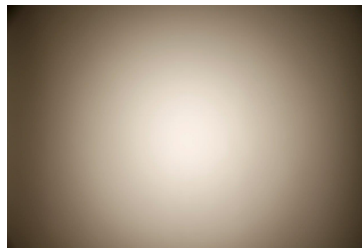

CITIZEN

LED CLL03x/CLU03x

FWHM 52.0°



Efficiency 92 %

Peak intensity 1.000 cd/lm

Required components:

C13658_CLAMP-VERO13-18

Bender Wirth: 433 Typ L1

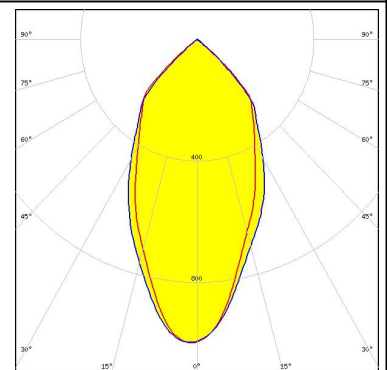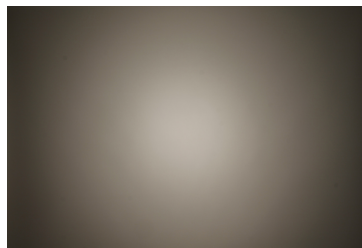

CITIZEN

LED CLL04x/CLU04x



FWHM 43.0°

Efficiency 91 %

Peak intensity 1.100 cd/lm

Required components:

IDEAL: 50-2204-CT + 50-2100AN

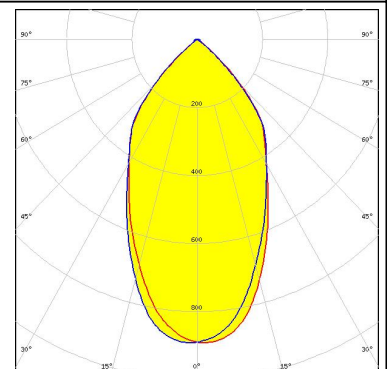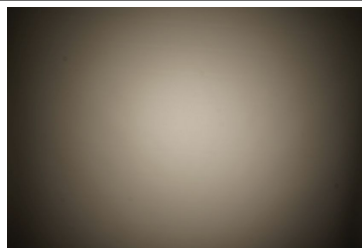

CITIZEN

LED CLL04x/CLU04x

FWHM 54.0°



Efficiency 92 %

Peak intensity 0.960 cd/lm

Required components:

C13584_CLAMP-VERO29



Bender Wirth: 431 Typ L3

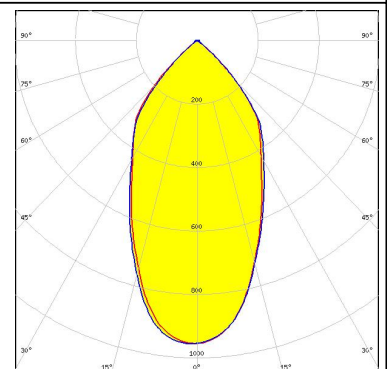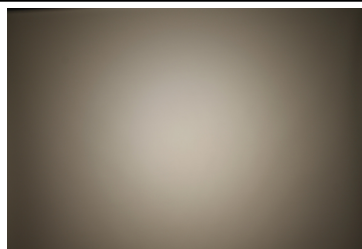

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLU700/701
 FWHM 42.0°
 Efficiency 92 %
 Peak intensity 1.200 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 434 Typ L1

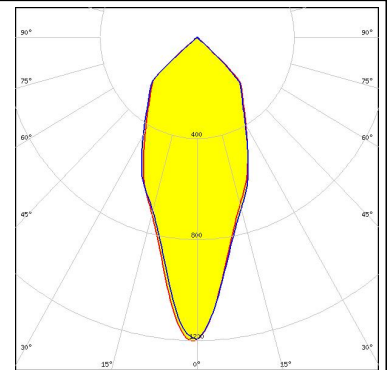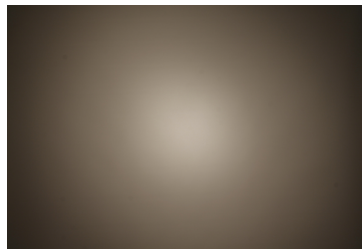



CITIZEN

LED CLU720/721
 FWHM 38.0°
 Efficiency 93 %
 Peak intensity 1.200 cd/lm
 Required components:
 IDEAL: 50-2103CT + 50-2100AN

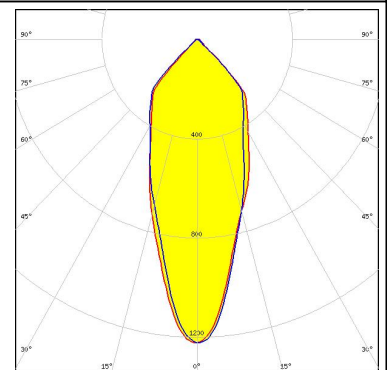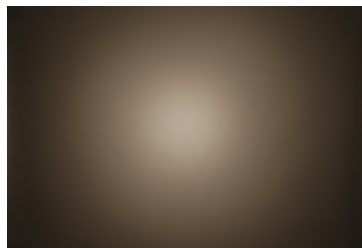



CITIZEN

LED CLU720/721
 FWHM 48.0°
 Efficiency 92 %
 Peak intensity 1.700 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18

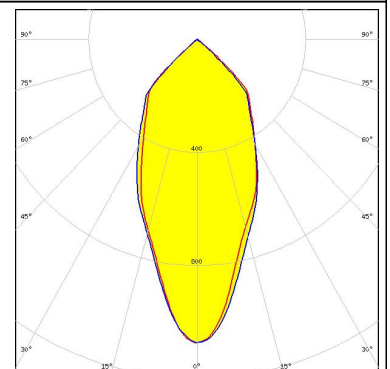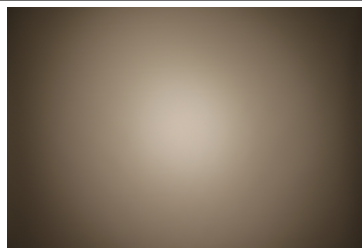

CITIZEN



LED CLU720/721
 FWHM 45.0°
 Efficiency 94 %
 Peak intensity 1.100 cd/lm
 Required components:
 TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1

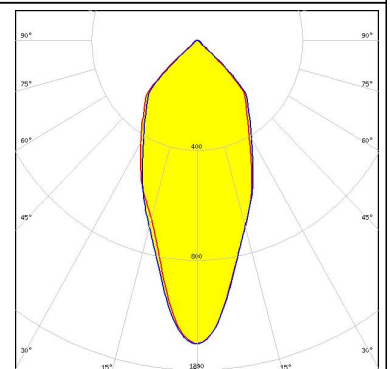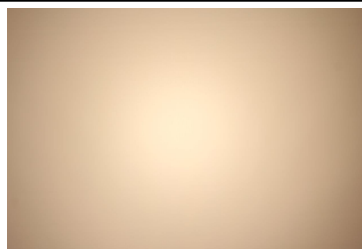

PHOTOMETRIC DATA (MEASURED):


CITIZEN

LED CLU730/731
 FWHM 56.0°
 Efficiency 91 %
 Peak intensity 1.100 cd/lm
 Required components:
 IDEAL: 50-2204-CT + 50-2100AN

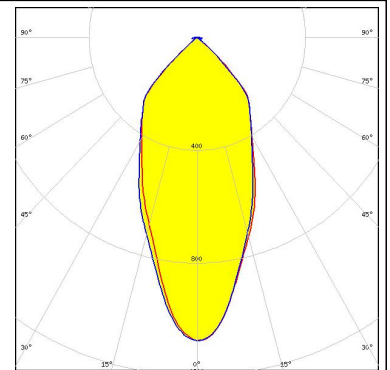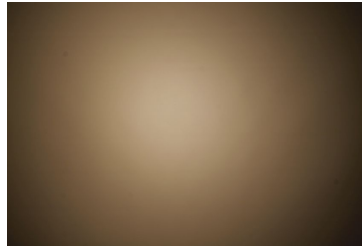


CREE

LED CXA/B 15xx
 FWHM 42.0°
 Efficiency 93 %
 Peak intensity 1.200 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 441 Typ L1

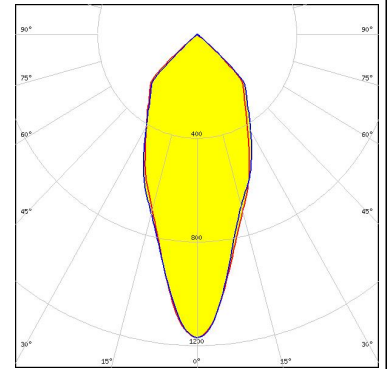



CREE

LED CXA/B 15xx
 FWHM 46.0°
 Efficiency 93 %
 Peak intensity 1.200 cd/lm
 Required components:
 C14123_CLAMP-CXA15-18
 LEDiL: LEDiL

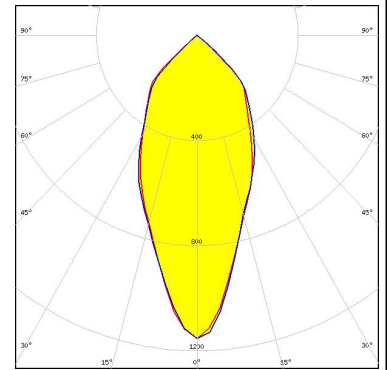

CREE



LED CXA/B 1816 & CXA/B 1820 & CXA 1850
 FWHM 50.0°
 Efficiency 94 %
 Peak intensity 1.100 cd/lm
 Required components:
 C14123_CLAMP-CXA15-18
 LEDiL: LEDiL

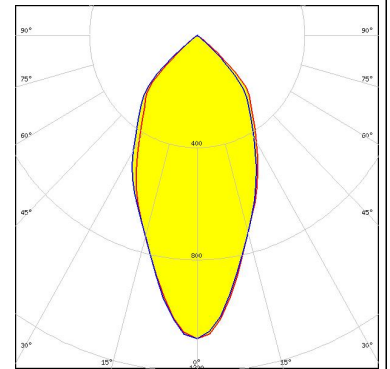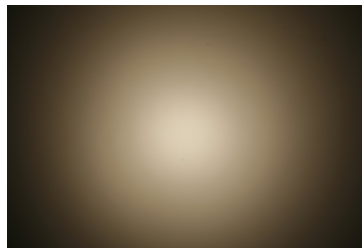



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 1816 & CXA/B 1820 & CXA 1850
 FWHM 50.0°
 Efficiency 92 %
 Peak intensity 1.000 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 437 Typ L1

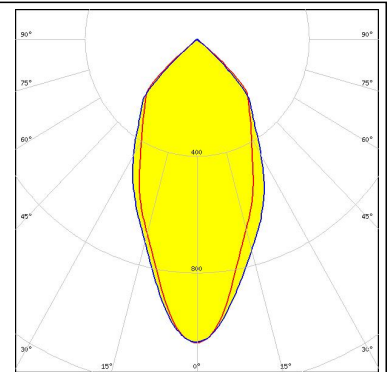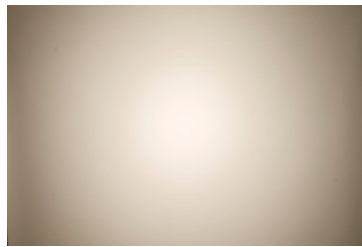



LED CXA/B 1816 & CXA/B 1820 & CXA 1850
 FWHM 39.0°
 Efficiency 94 %
 Peak intensity 1.280 cd/lm
 Required components:
 IDEAL: 50-2101CR + 50-2100AN

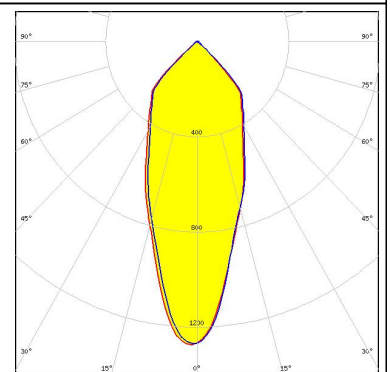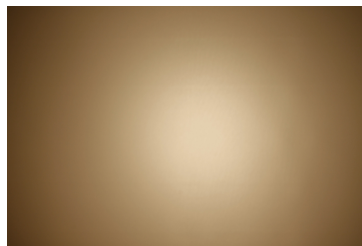

LED CXA/B 25xx
 FWHM 56.0°
 Efficiency 93 %
 Peak intensity 0.900 cd/lm
 Required components:
 C14036_CLAMP-CXA25-30
 LEDiL: LEDiL

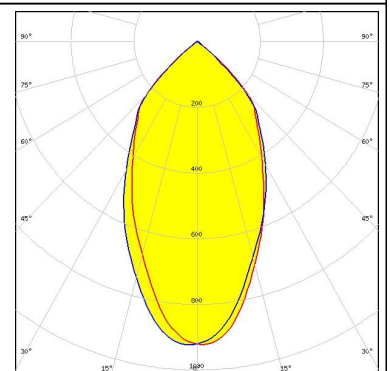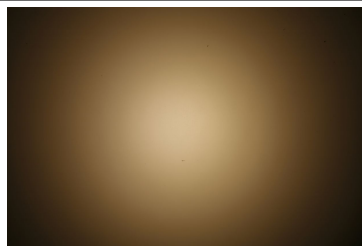



LED CXA/B 25xx
 FWHM 47.0°
 Efficiency 94 %
 Peak intensity 1.090 cd/lm
 Required components:
 IDEAL: 50-2102CR + 50-2100AN

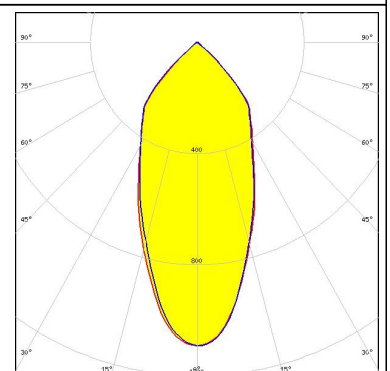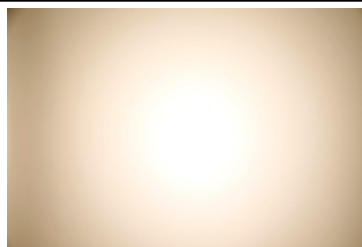



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 30xx
 FWHM 61.0°
 Efficiency 92 %
 Peak intensity 0.840 cd/lm
 Required components:
 C14036_CLAMP-CXA25-30

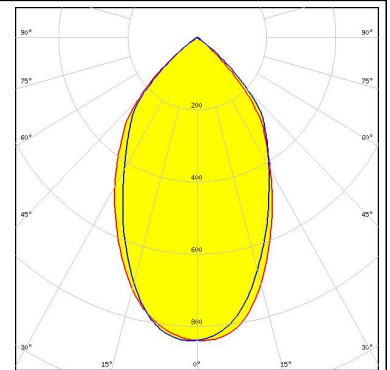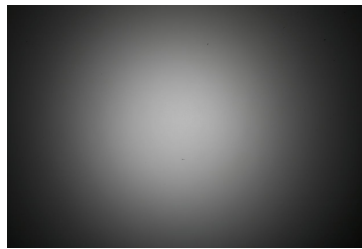


LED CXA/B 30xx
 FWHM 52.0°
 Efficiency 93 %
 Peak intensity 0.980 cd/lm
 Required components:
 IDEAL: 50-2234C + 50-2100AN

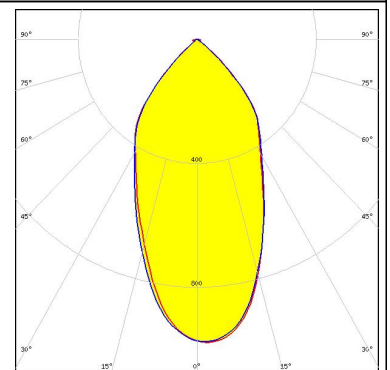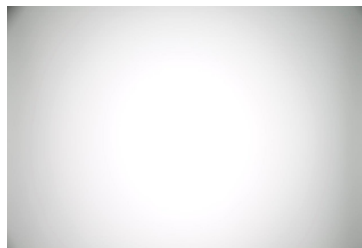

LED CXA/B 3590
 FWHM 66.0°
 Efficiency 93 %
 Peak intensity 0.790 cd/lm
 Required components:
 IDEAL: 50-2303CR + 50-2300AN

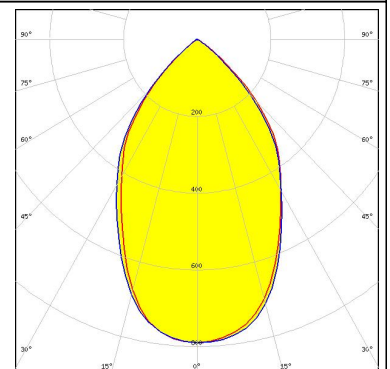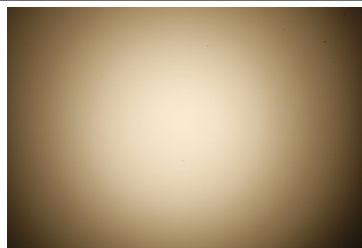


LED CHI3030 19W
 FWHM 54.0°
 Efficiency 88 %
 Peak intensity 0.900 cd/lm
 Required components:
 C13584_CLAMP-VERO29
 F13671_ANGE-RZ-LENS
 Bender Wirth: 468 Typ L3

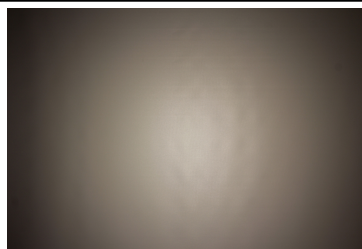

PHOTOMETRIC DATA (MEASURED):



EVERLIGHT

LED CHI3030 29W
 FWHM 62.0°
 Efficiency 87 %
 Peak intensity 0.900 cd/lm
 Required components:
 C13584_CLAMP-VERO29
 F13671_ANGE-RZ-LENS
 Bender Wirth: 468 Typ L3

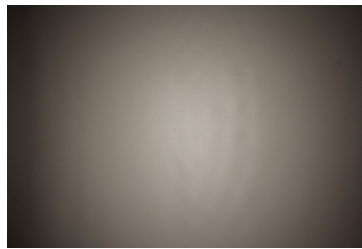



LG Innotek

LED COB 10W/13W/17W/24W
 FWHM 40.0°
 Efficiency 93 %
 Peak intensity 1.250 cd/lm
 Required components:
 IDEAL: 50-2100LG + 50-2100AN

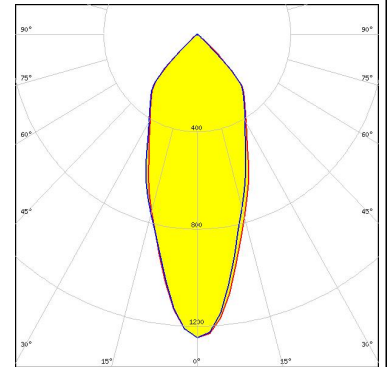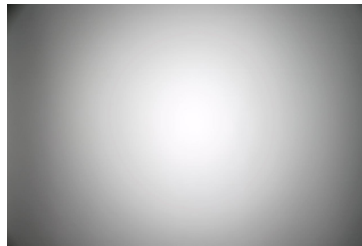



LUMILEDS

LED LUXEON CoB 1202/1203
 FWHM 45.0°
 Efficiency 93 %
 Peak intensity 1.100 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 438 Typ L1

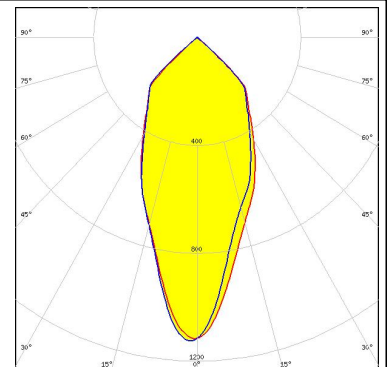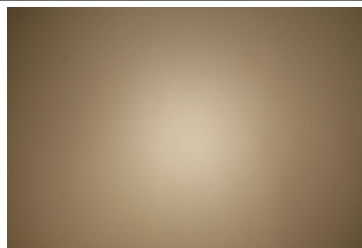

LUMILEDS

LED LUXEON CoB 1204/1205
 FWHM 40.0°
 Efficiency 93 %
 Peak intensity 1.240 cd/lm
 Required components:
 IDEAL: 50-2100SH + 50-2100AN

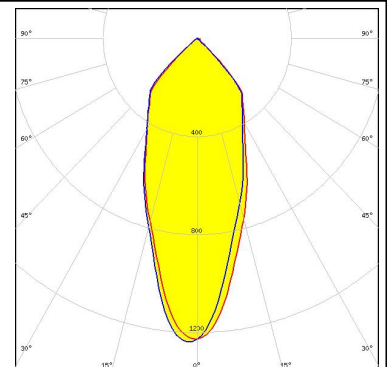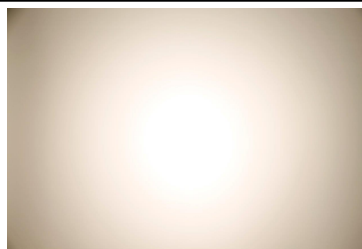

PHOTOMETRIC DATA (MEASURED):

LUMILEDS

LED LUXEON CoB 1204/1205



FWHM 45.0°

Efficiency 94 %

Peak intensity 1.200 cd/lm

Required components:

TE: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1

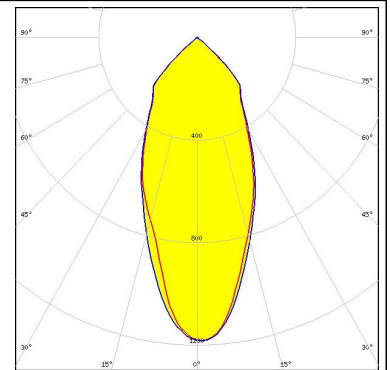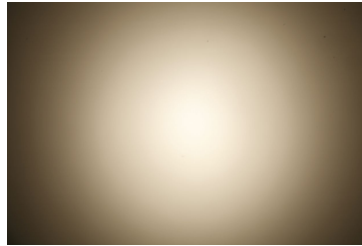

LUMILEDS

LED LUXEON CoB 1208



FWHM 48.0°

Efficiency 93 %

Peak intensity 1.100 cd/lm

Required components:

TE: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1

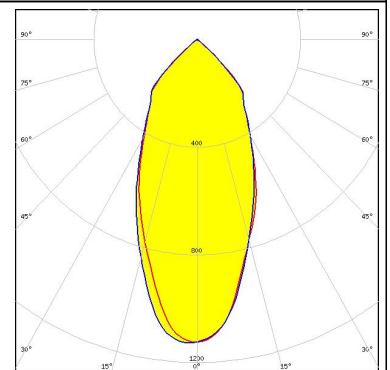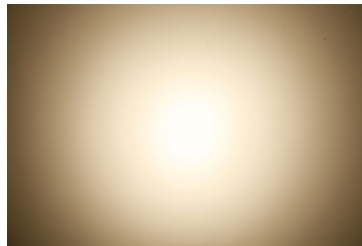

LUMILEDS

LED LUXEON CoB 1208



FWHM 44.0°

Efficiency 93 %

Peak intensity 1.170 cd/lm

Required components:

IDEAL: 50-2100SH + 50-2100AN

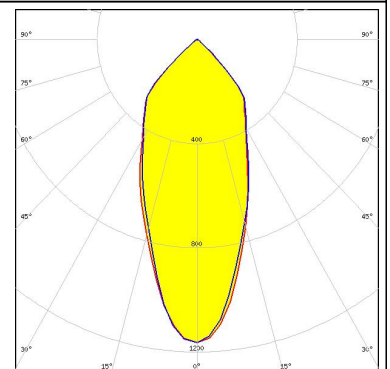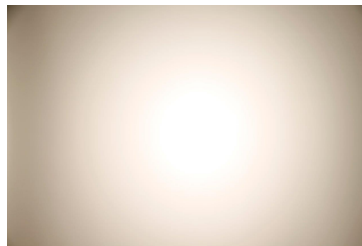

LUMILEDS

LED LUXEON CoB 1211



FWHM 53.0°

Efficiency 91 %









Peak intensity 0.910 cd/lm

Required components:






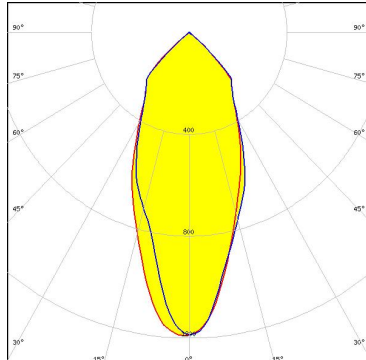
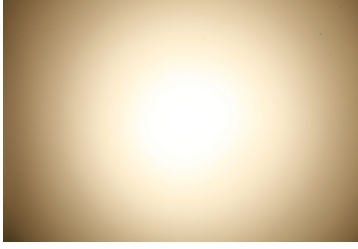
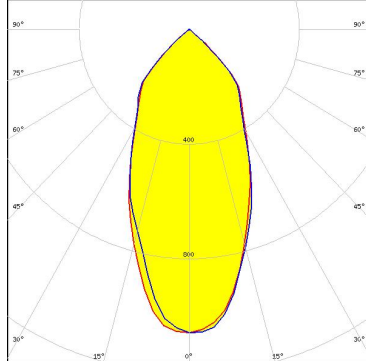
IDEAL: 50-2204-CT + 50-2100AN

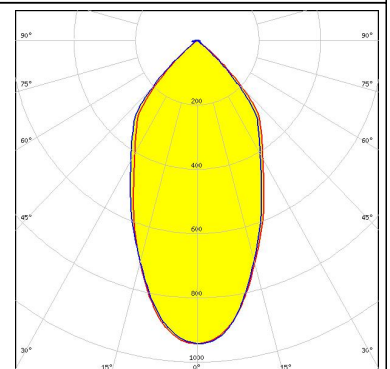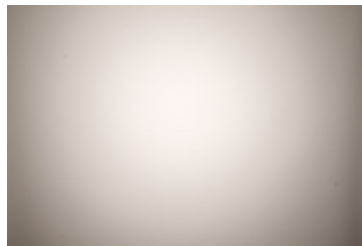

PHOTOMETRIC DATA (MEASURED):
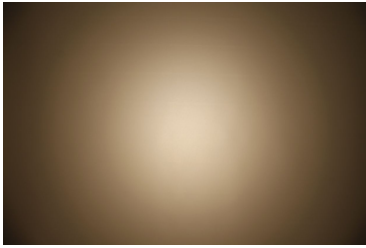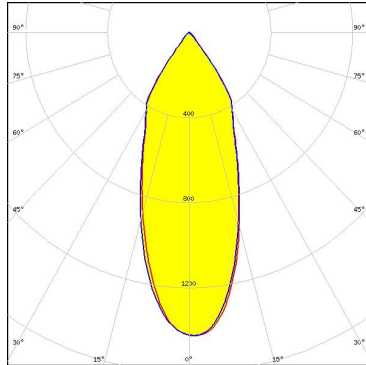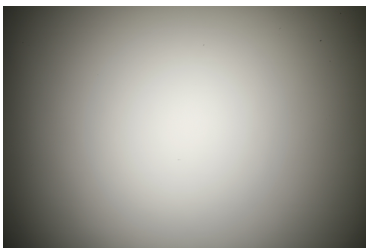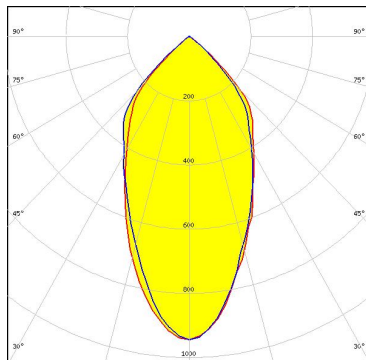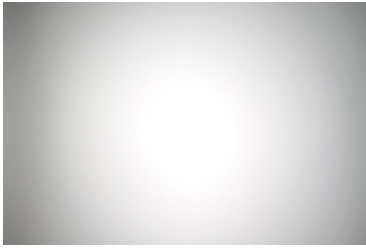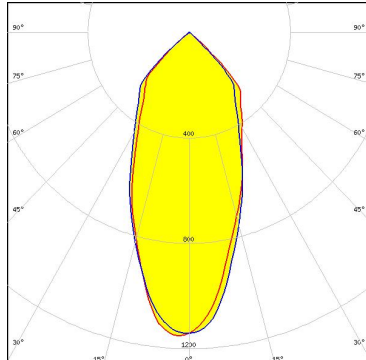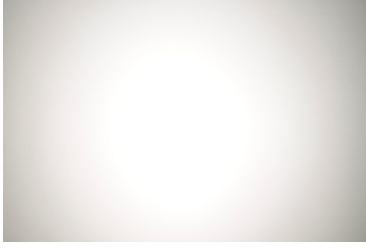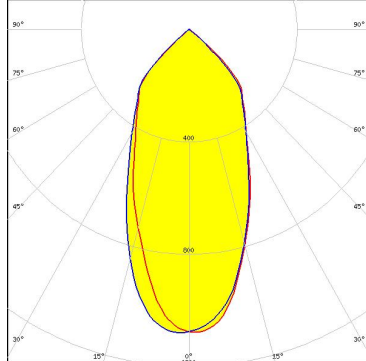
<p>LUMILEDS</p> <p>LED LUXEON CoB 1211</p> <p>FWHM 55.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 0.940 cd/lm</p> <p>Required components: C13584_CLAMP-VERO29 Bender Wirth: 431 Typ L3</p>		
<p>LUMILEDS</p> <p>LED LUXEON K12</p> <p>FWHM 54.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 1.000 cd/lm</p> <p>Required components: F13671_ANGE-RZ-LENS TE: 2213134-2 + OPTIC CLIP Z50 TYPE1 2213194-1</p>		
<p>LUMILEDS</p> <p>LED LUXEON K12</p> <p>FWHM 45.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 1.150 cd/lm</p> <p>Required components: TE: 2213134-2 + OPTIC CLIP Z50 TYPE1 2213194-1</p>		
<p>LUMILEDS</p> <p>LED LUXEON K16</p> <p>FWHM 48.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 1.000 cd/lm</p> <p>Required components: TE: 2213134-2 + OPTIC CLIP Z50 TYPE1 2213194-1</p>		

PHOTOMETRIC DATA (MEASURED):

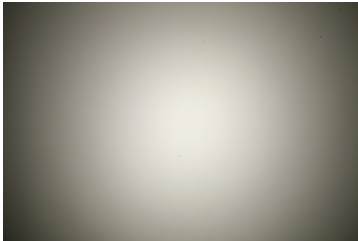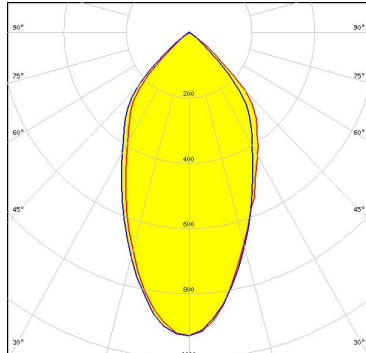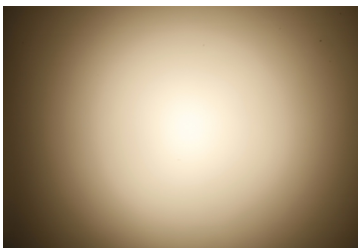
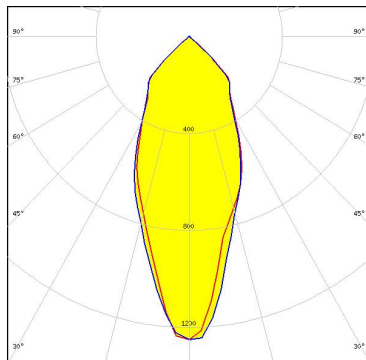
<p>LUMILEDS</p> <p>LED LUXEON K16</p> <p>FWHM 54.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 0.900 cd/lm</p> <p>Required components: F13671_ANGE-RZ-LENS TE: 2213134-2 + OPTIC CLIP Z50 TYPE1 2213194-1</p>		
<p>LUMILEDS</p> <p>LED LUXEON S2000</p> <p>FWHM 42.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 1.300 cd/lm</p> <p>Required components: C13395_CLAMP-S2000 LEDiL: LEDiL</p>		
<p>LUMILEDS</p> <p>LED LUXEON S3000</p> <p>FWHM 44.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 1.200 cd/lm</p> <p>Required components: C13397_CLAMP-S3000 LEDiL: LEDiL</p>		
<p>LUMILEDS</p> <p>LED LUXEON S5000</p> <p>FWHM 49.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 1.000 cd/lm</p> <p>Required components: C13399_CLAMP-S5000 LEDiL: LEDiL</p>		

PHOTOMETRIC DATA (MEASURED):





LED CXM-14
 FWHM 48.0°
 Efficiency 93 %
 Peak intensity 1.070 cd/lm
 Required components:

TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1

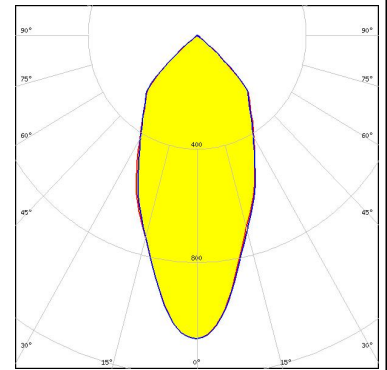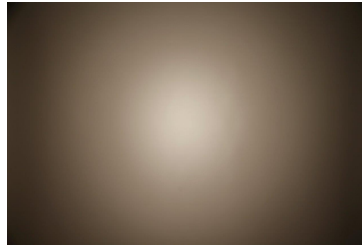



LED COB J-Type
 FWHM 48.0°
 Efficiency 87 %
 Peak intensity 0.930 cd/lm
 Required components:

F13671_ANGE-RZ-LENS
 IDEAL: 50-2103NC + 50-2100AN

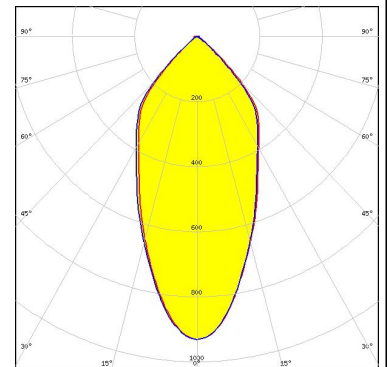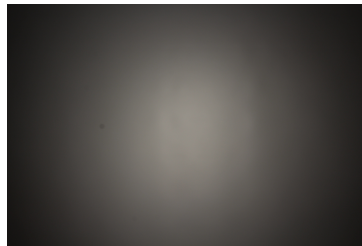



LED COB J-Type
 FWHM 43.0°
 Efficiency 94 %
 Peak intensity 1.190 cd/lm
 Required components:

IDEAL: 50-2103NC + 50-2100AN

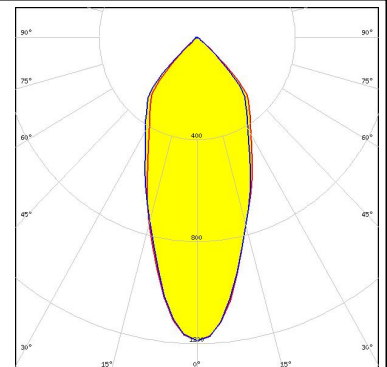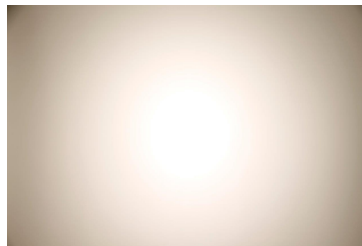

LED COB J-Type
 FWHM 51.0°
 Efficiency 93 %
 Peak intensity 1.000 cd/lm
 Required components:



C13658_CLAMP-VERO13-18
 Bender Wirth: 463 Typ L2

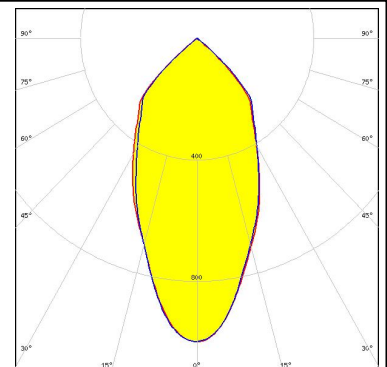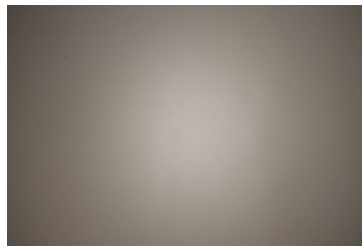



PHOTOMETRIC DATA (MEASURED):





LED COB L-Type (LES 11)
 FWHM 39.0°
 Efficiency 91 %
 Peak intensity 1.230 cd/lm
 Required components:
 IDEAL: 50-2100NC + 50-2100AN

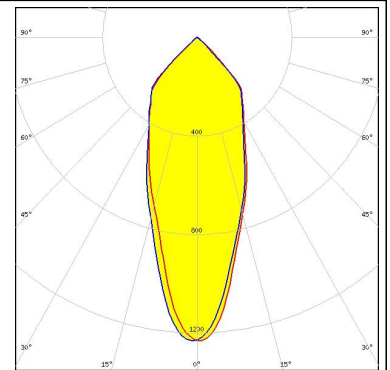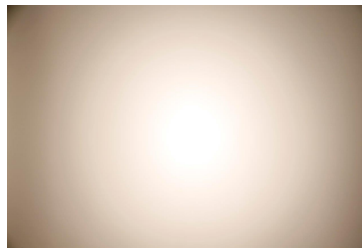



LED COB L-Type (LES 11)
 FWHM 51.0°
 Efficiency 94 %
 Peak intensity 1.015 cd/lm
 Required components:
 Molex: 180580-0005

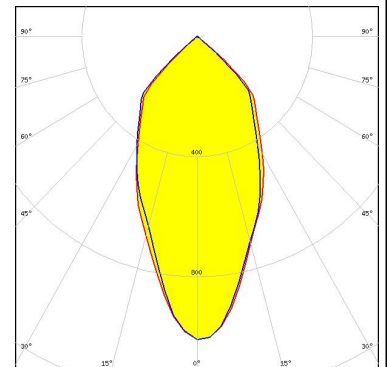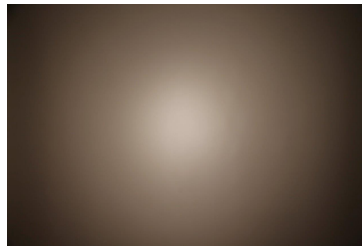

LED COB L-Type (LES 11)
 FWHM 47.0°
 Efficiency 92 %
 Peak intensity 1.100 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 438 Typ L1

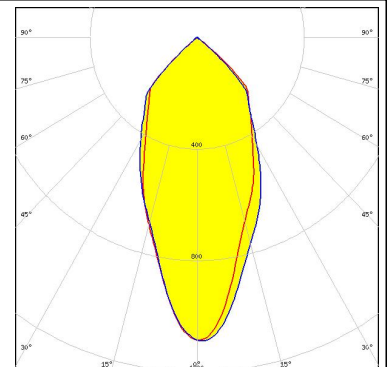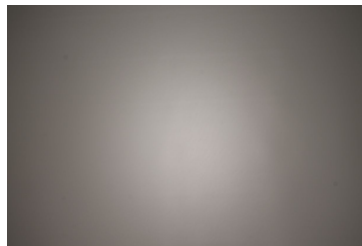



LED COB L-Type (LES 11)
 FWHM 48.0°
 Efficiency 92 %
 Peak intensity 1.060 cd/lm
 Required components:
 TE: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1

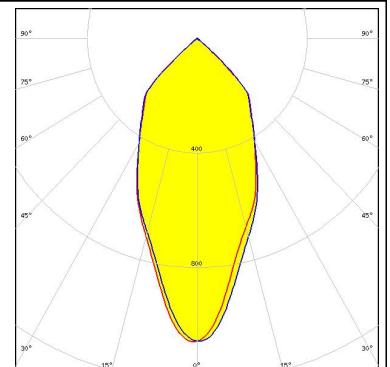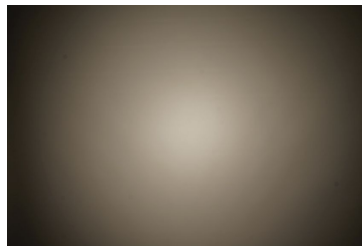

PHOTOMETRIC DATA (MEASURED):


OSRAM

LED PrevaLED Core AC (LEP-2000)
 FWHM 49.0°
 Efficiency 93 %
 Peak intensity 1.070 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

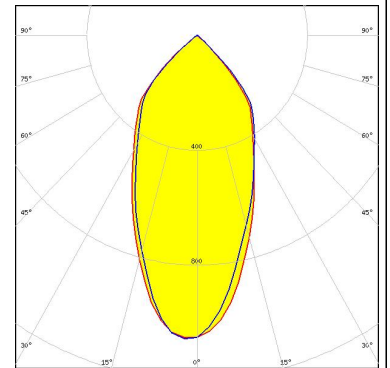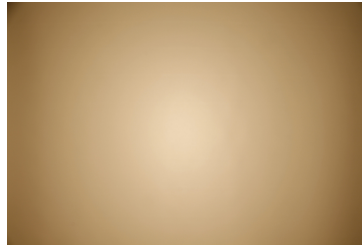



OSRAM

LED PrevaLED Core AC (LEP-800)
 FWHM 40.0°
 Efficiency 93 %
 Peak intensity 1.260 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

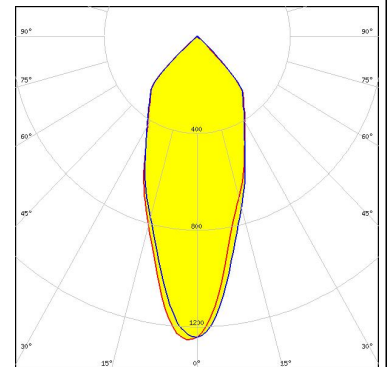



OSRAM

LED PrevaLED Core Z3 LES19
 FWHM 50.0°
 Efficiency 94 %
 Peak intensity 1.040 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

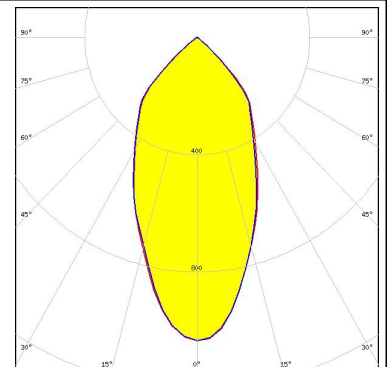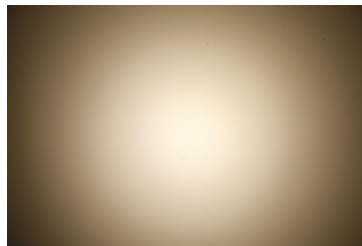

OSRAM


LED PrevaLED Core Z3 LES23
 FWHM 55.0°
 Efficiency 94 %
 Peak intensity 0.950 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

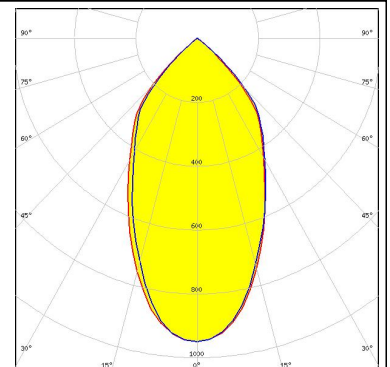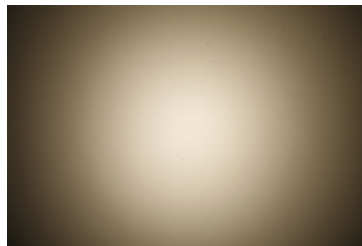

PHOTOMETRIC DATA (MEASURED):



OSRAM

LED PrevaLED Core Z3 LES9
 FWHM 38.0°
 Efficiency 93 %
 Peak intensity 1.280 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

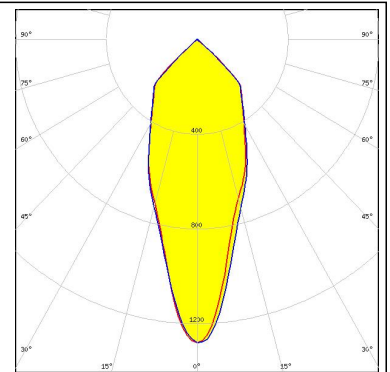



OSRAM

LED PrevaLED Core Z4 LES19
 FWHM 47.0°
 Efficiency 93 %
 Peak intensity 1.100 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

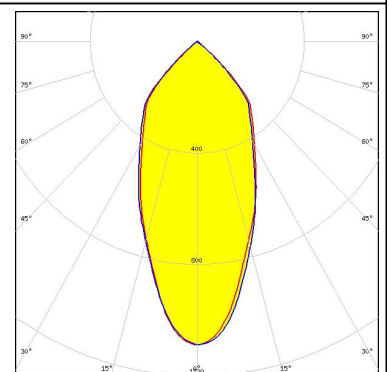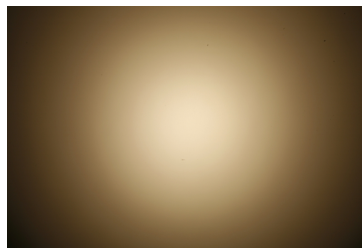



OSRAM

LED PrevaLED Core Z4 LES19
 FWHM 55.0°
 Efficiency 88 %
 Peak intensity 0.870 cd/lm
 Required components:
 F13671_ANGE-RZ-LENS
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

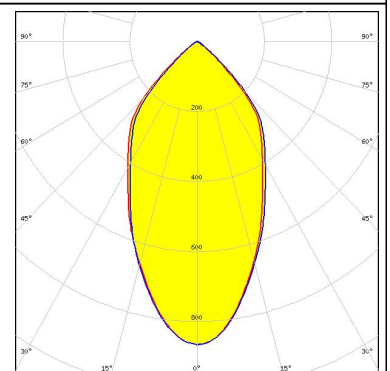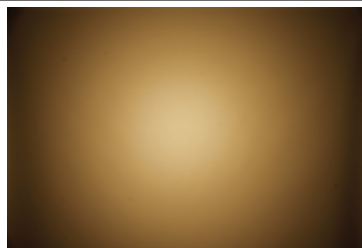

OSRAM Opto Semiconductors



LED Soleriq P13
 FWHM 47.0°
 Efficiency 93 %
 Peak intensity 1.080 cd/lm
 Required components:
 TE: 2213401-2 + OPTIC CLIP Z50 TYPE1 2213194-1

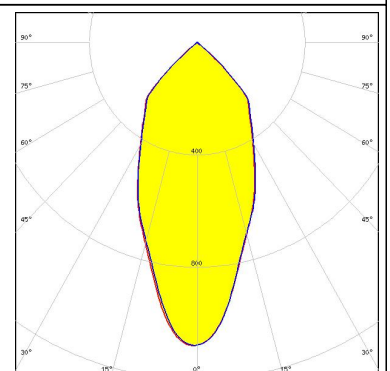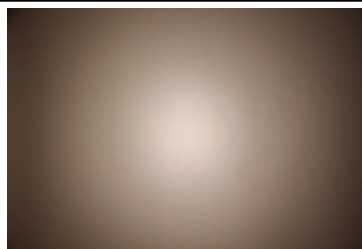

PHOTOMETRIC DATA (MEASURED):


OSRAM
Opto Semiconductors

LED Soleriq P13
 FWHM 44.0°
 Efficiency 92 %
 Peak intensity 1.100 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 437 Typ L1

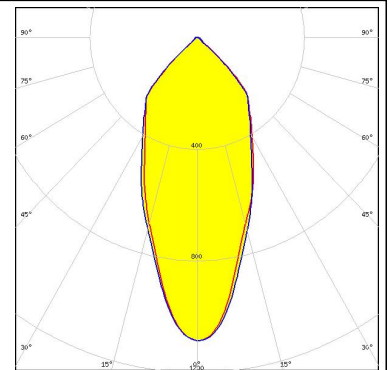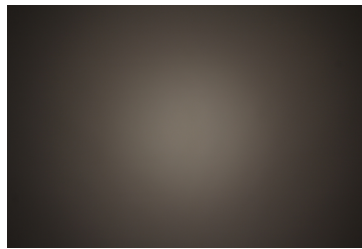



OSRAM
Opto Semiconductors

LED Soleriq P9
 FWHM 44.0°
 Efficiency 92 %
 Peak intensity 1.200 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 461 Typ L1

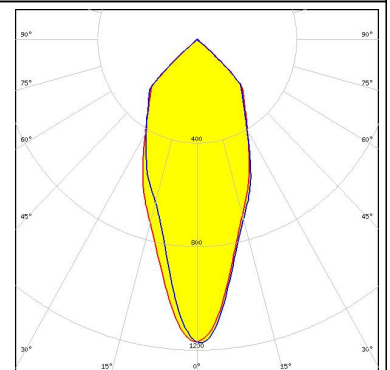



OSRAM
Opto Semiconductors

LED Soleriq S13
 FWHM 47.0°
 Efficiency 94 %
 Peak intensity 1.200 cd/lm
 Required components:
 TE: 2213401-2 + OPTIC CLIP Z50 TYPE1 2213194-1

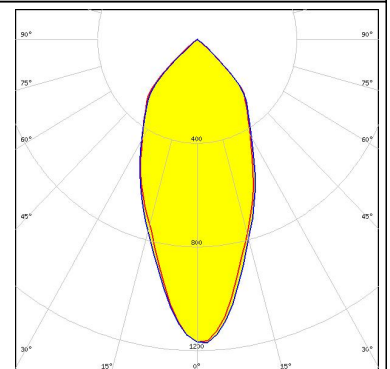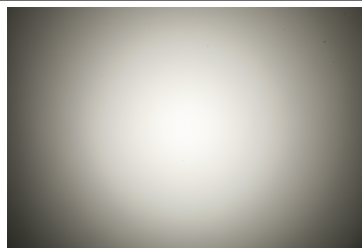

OSRAM
Opto Semiconductors

LED Soleriq S13
 FWHM 49.0°
 Efficiency 92 %
 Peak intensity 1.100 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 437 Typ L1

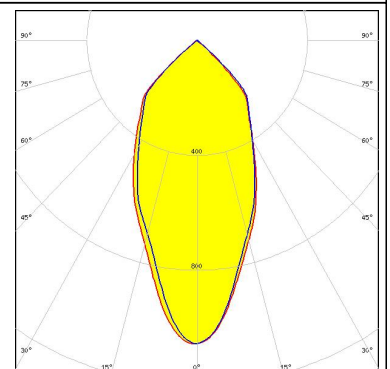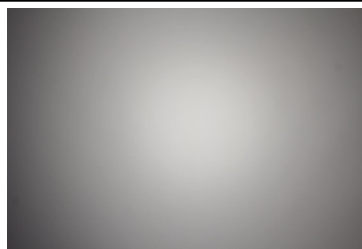

PHOTOMETRIC DATA (MEASURED):

OSRAM
Opto Semiconductors

LED Soleriq S13 Gen2



FWHM 51.0°

Efficiency 92 %

Peak intensity 1.000 cd/lm

Required components:

TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1

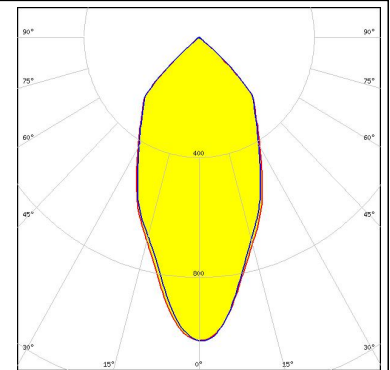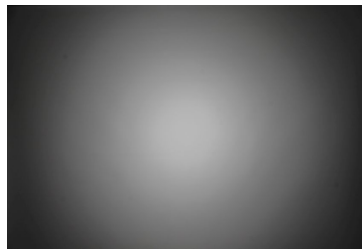

OSRAM
Opto Semiconductors

LED Soleriq S13 Gen2



FWHM 45.0°

Efficiency 91 %

Peak intensity 1.100 cd/lm

Required components:

IDEAL: 50-2103CT + 50-2100AN

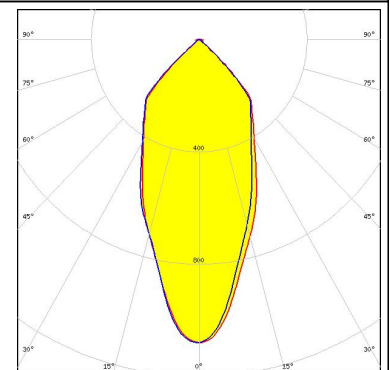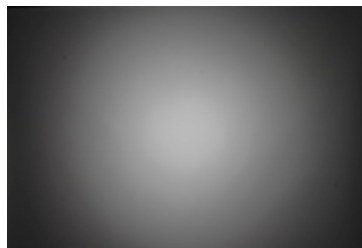

OSRAM
Opto Semiconductors

LED Soleriq S19

FWHM 48.0°



Efficiency 91 %

Peak intensity 1.000 cd/lm

Required components:

C13584_CLAMP-VERO29

Bender Wirth: 462 Typ L3

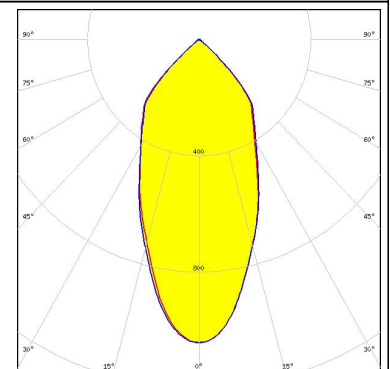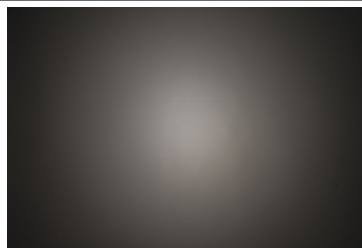

OSRAM
Opto Semiconductors

LED Soleriq S19



FWHM 49.0°

Efficiency 94 %

Peak intensity 1.050 cd/lm

Required components:


TE: 2213407-2 + OPTIC CLIP Z50 TYPE1 2213194-1

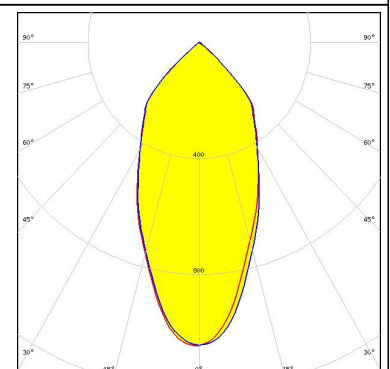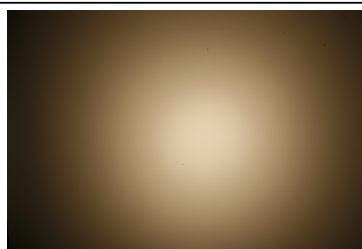

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo LED SLM L13 G4 standard
 FWHM 45.0°
 Efficiency 93 %
 Peak intensity 1.100 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

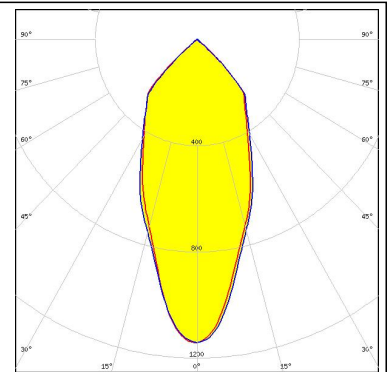



PHILIPS

LED Fortimo LED SLM L15 G4 standard
 FWHM 47.0°
 Efficiency 93 %
 Peak intensity 1.100 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

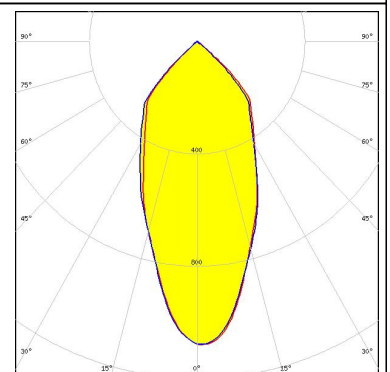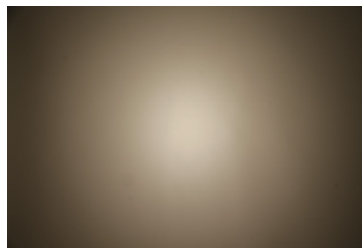



PHILIPS

LED Fortimo LED SLM L19 G4 standard
 FWHM 52.0°
 Efficiency 92 %
 Peak intensity 0.970 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

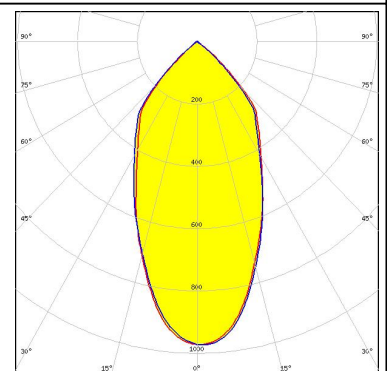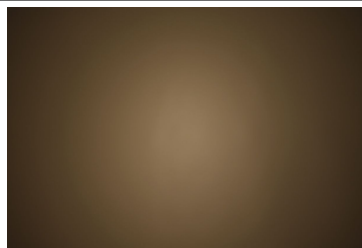

PHILIPS


LED Fortimo LED SLM L9 G4 standard
 FWHM 38.0°
 Efficiency 92 %
 Peak intensity 1.200 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

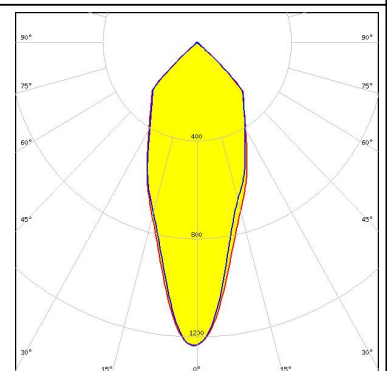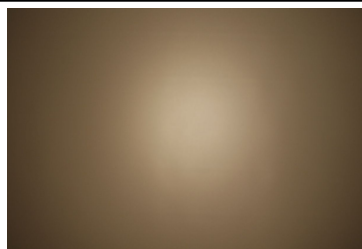

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo SLM 1211 L19 G6 Standard
 FWHM 54.0°
 Efficiency 92 %
 Peak intensity 0.950 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

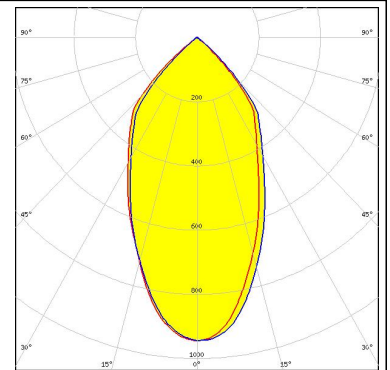



PHILIPS

LED Fortimo SLM 2000 G3
 FWHM 50.0°
 Efficiency 91 %
 Peak intensity 1.000 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

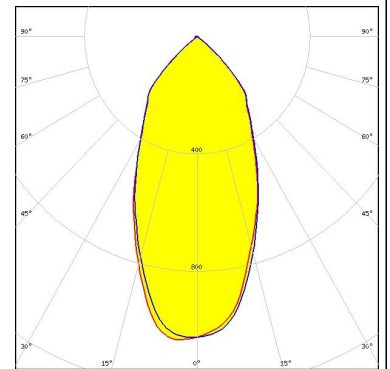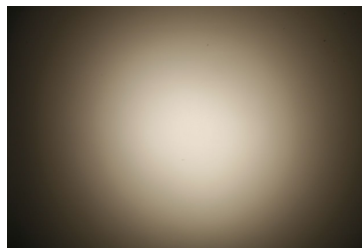



PHILIPS

LED Fortimo SLM 3000 G3
 FWHM 50.0°
 Efficiency 90 %
 Peak intensity 1.000 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

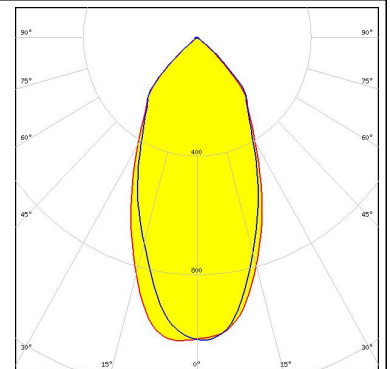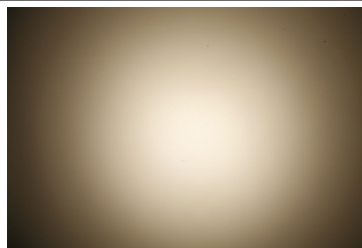

PHILIPS



LED Fortimo SLM 4500 G3
 FWHM 53.0°
 Efficiency 89 %
 Peak intensity 0.900 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

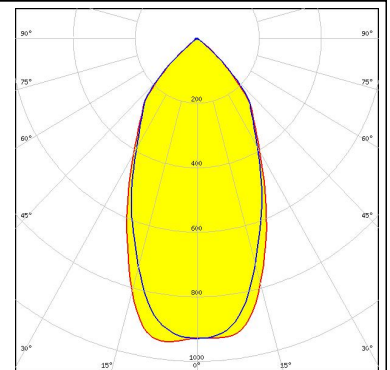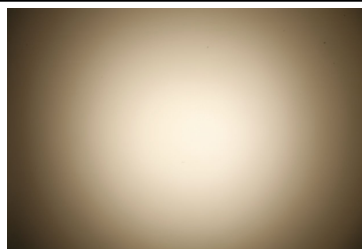

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo SLM G5 LES 13 Standard
 FWHM 48.0°
 Efficiency 92 %
 Peak intensity 1.070 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

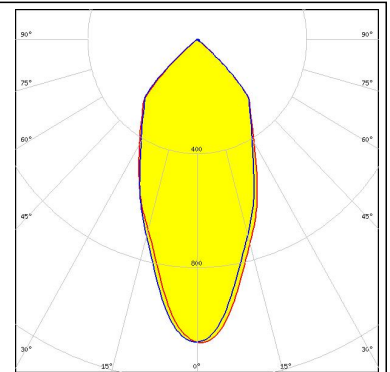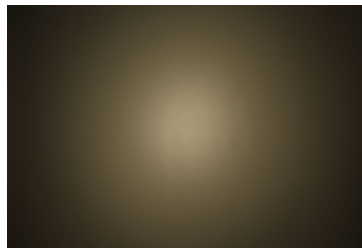



PHILIPS

LED Fortimo SLM G5 LES 15 Standard
 FWHM 51.0°
 Efficiency 90 %
 Peak intensity 1.000 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

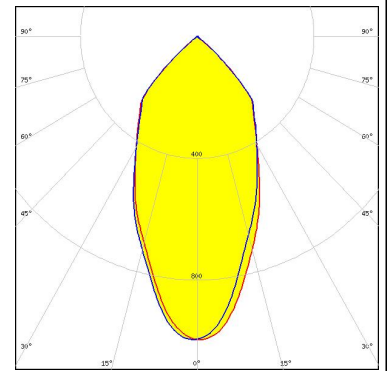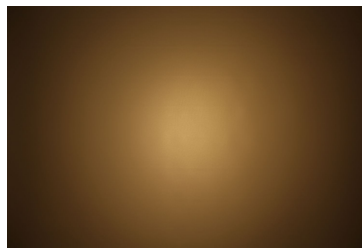



PHILIPS

LED Fortimo SLM G5 LES 15 Standard
 FWHM 57.0°
 Efficiency 87 %
 Peak intensity 0.840 cd/lm
 Required components:
 F13671_ANGE-RZ-LENS
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

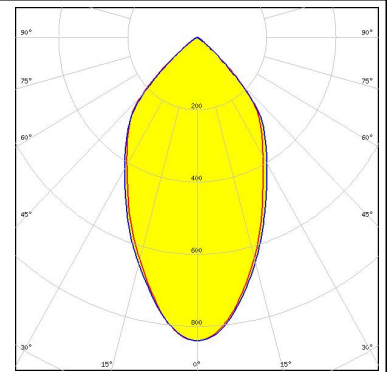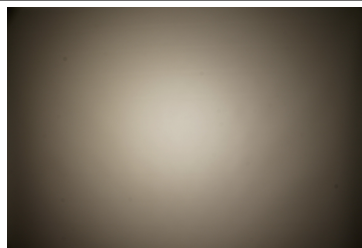

PHILIPS


LED Fortimo SLM G5 LES 19 Standard
 FWHM 54.0°
 Efficiency 89 %
 Peak intensity 0.920 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

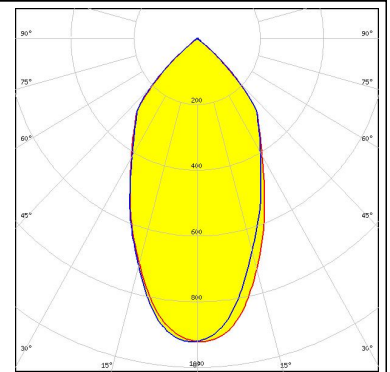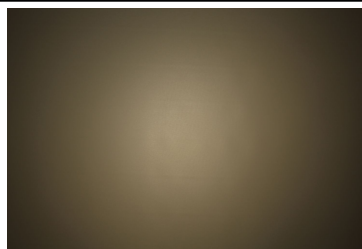

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo SLM G5 LES 9 Standard
 FWHM 42.0°
 Efficiency 92 %
 Peak intensity 1.190 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

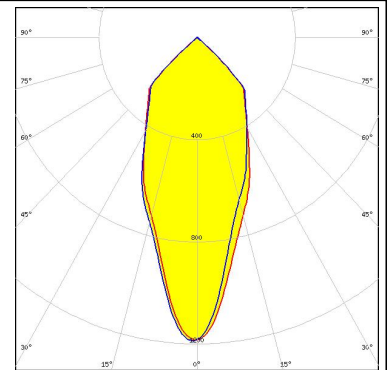



SAMSUNG

LED LC026B / 033B / 040B
 FWHM 54.0°
 Efficiency 92 %
 Peak intensity 0.950 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 450 Typ L2

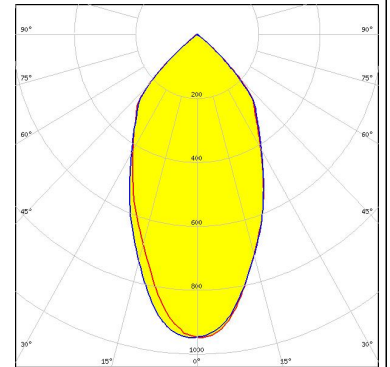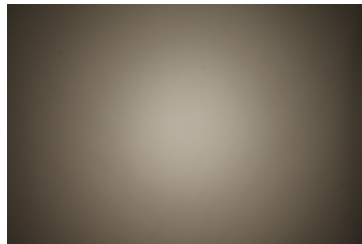



SAMSUNG

LED LC026B / 033B / 040B
 FWHM 51.0°
 Efficiency 92 %
 Peak intensity 1.000 cd/lm
 Required components:
 TE: 2213258-2 + OPTIC CLIP Z50 TYPE1 2213194-1

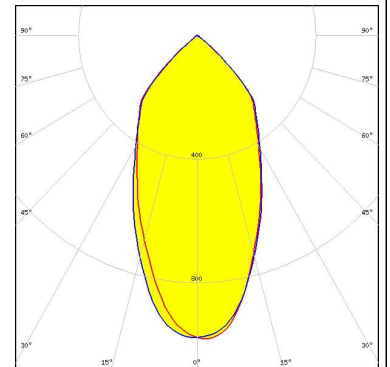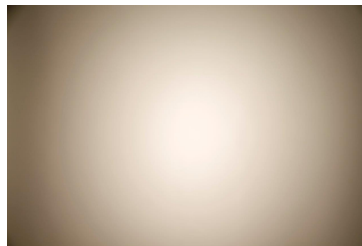
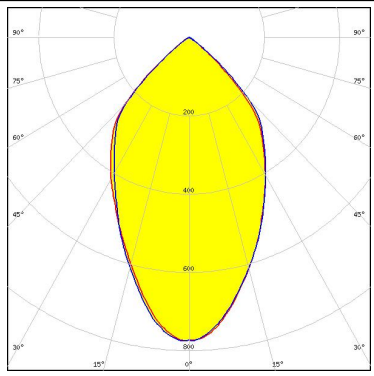

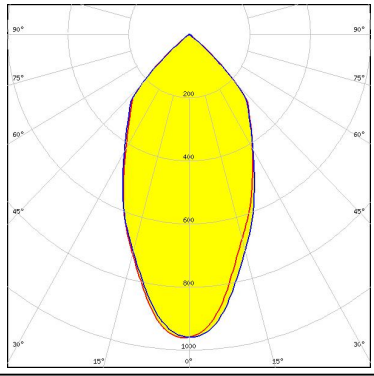

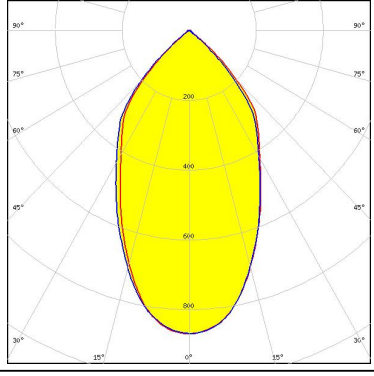
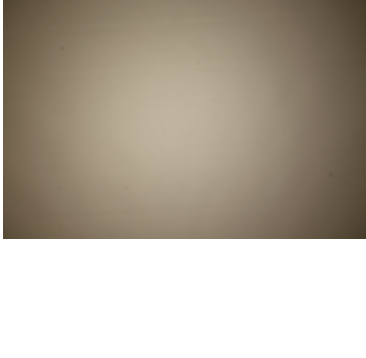
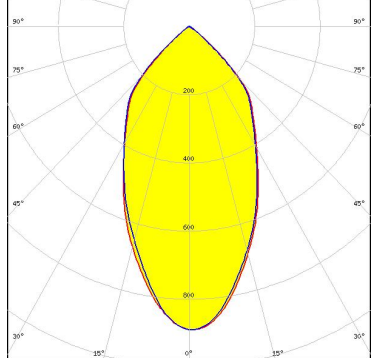


SAMSUNG

LED LC040C
 FWHM 46.0°
 Efficiency 90 %
 Peak intensity 1.100 cd/lm
 Required components:
 TE: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1

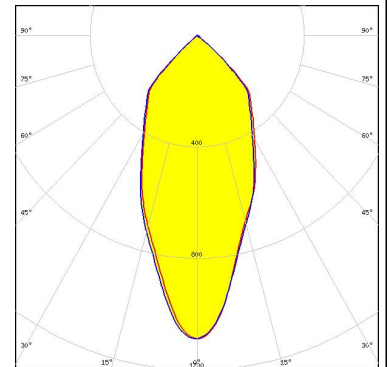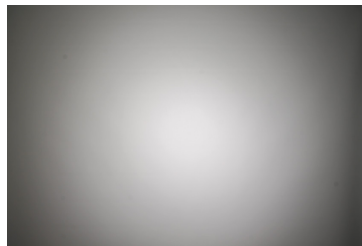

PHOTOMETRIC DATA (MEASURED):

<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED AC Zhaga COB FWHM 64.0° Efficiency 89 % Peak intensity 0.780 cd/lm Required components: F13671_ANGE-RZ-LENS Optosource: SEHSMJD-A</p>		
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED MJT COB LES 14.5 FWHM 54.0° Efficiency 92 % Peak intensity 1.000 cd/lm Required components: TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1</p>		
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED MJT COB LES 22 FWHM 58.0° Efficiency 90 % Peak intensity 0.870 cd/lm Required components: C13584_CLAMP-VERO29 Bender Wirth: 431 Typ L3</p>		
<p>SHARP</p> <p>LED Mega Zenigata (GW6DME) FWHM 55.0° Efficiency 89 % Peak intensity 0.890 cd/lm Required components: F13671_ANGE-RZ-LENS TE: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1</p>		

PHOTOMETRIC DATA (MEASURED):

SHARP

LED Mega Zenigata (GW6DME)



FWHM 47.0°

Efficiency 92 %

Peak intensity 1.100 cd/lm

Required components:

TE: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1

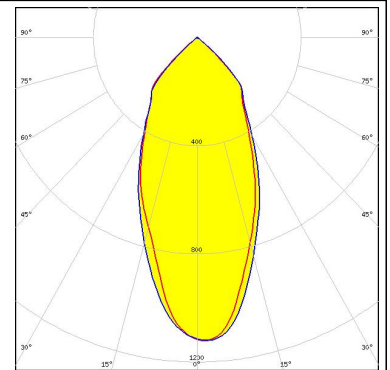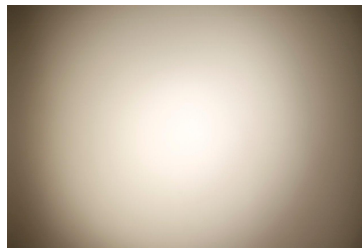

SHARP

LED Mega Zenigata (GW6DME)



FWHM 43.0°

Efficiency 93 %

Peak intensity 1.180 cd/lm

Required components:

IDEAL: 50-2100SH + 50-2100AN

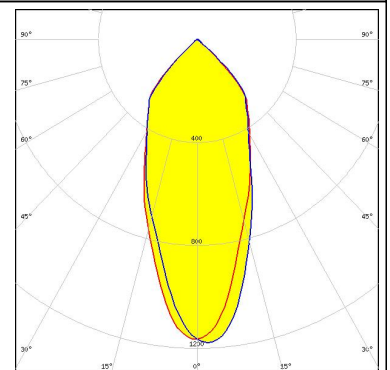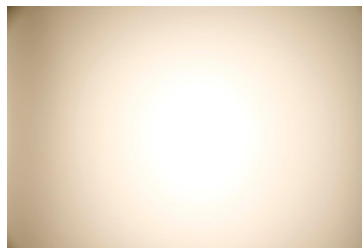

TRIDONIC

LED SLE G4 LES19 H



FWHM 49.0°

Efficiency 90 %

Peak intensity 1.000 cd/lm

Required components:

TE: OPTIC CLIP Z50 TYPE1 2213194-1

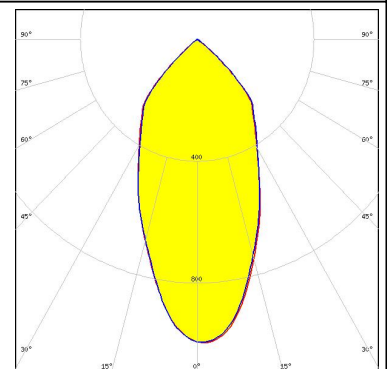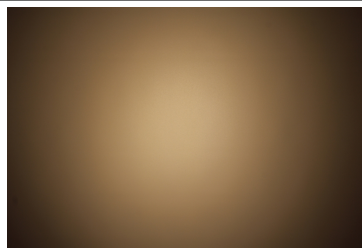

TRIDONIC

LED SLE G4 LES23 H



FWHM 54.0°

Efficiency 93 %

Peak intensity 0.960 cd/lm

Required components:


TE: OPTIC CLIP Z50 TYPE1 2213194-1

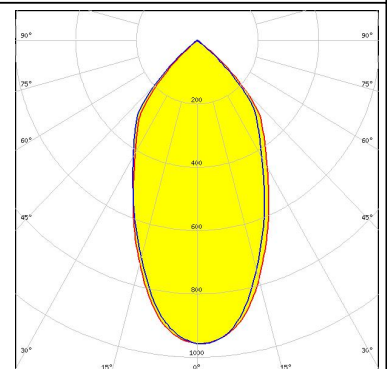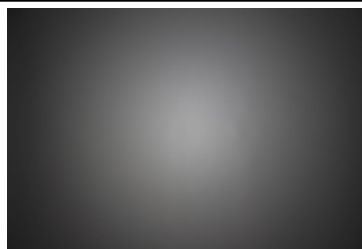

PHOTOMETRIC DATA (MEASURED):



TRIDONIC

LED SLE G5 LES11
 FWHM 47.0°
 Efficiency 92 %
 Peak intensity 1.100 cd/lm
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 434 Typ L1

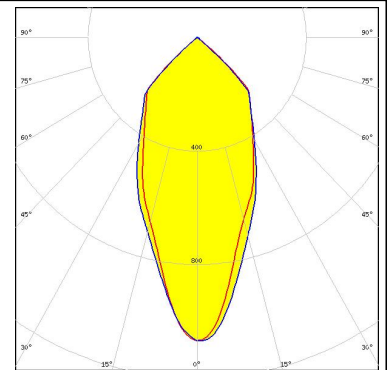


TRIDONIC

LED SLE G5 LES15
 FWHM 50.0°
 Efficiency 92 %
 Peak intensity 1.030 cd/lm
 Required components:
 TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1

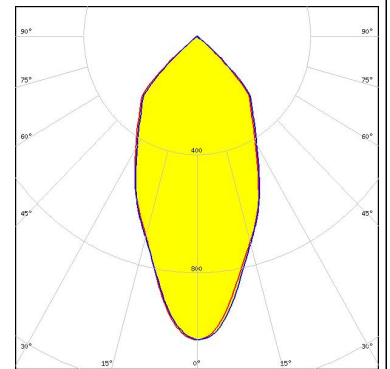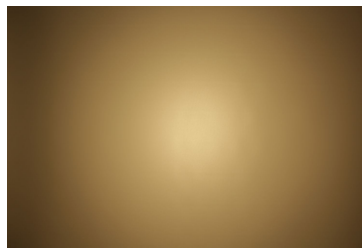


TRIDONIC

LED SLE G5 LES19 H
 FWHM 51.0°
 Efficiency 92 %
 Peak intensity 1.000 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

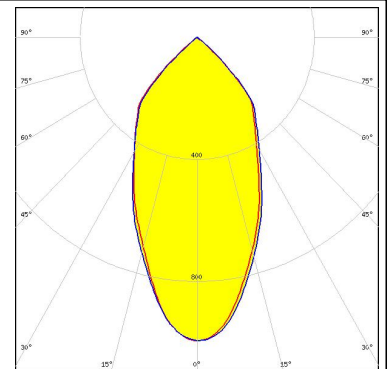

TRIDONIC



LED SLE G5 LES23 H
 FWHM 57.0°
 Efficiency 93 %
 Peak intensity 0.910 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

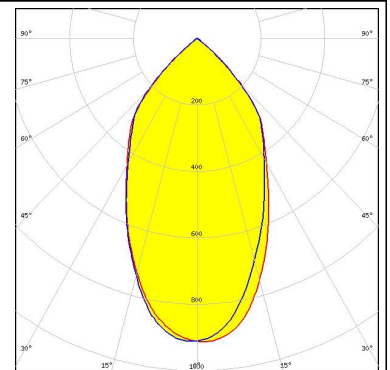

PHOTOMETRIC DATA (MEASURED):



TRIDONIC

LED STARK SLE G2 LES19
FWHM 49.0°
Efficiency 92 %
Peak intensity 1.100 cd/lm
Required components:
TE: OPTIC CLIP Z50 TYPE1 2213194-1

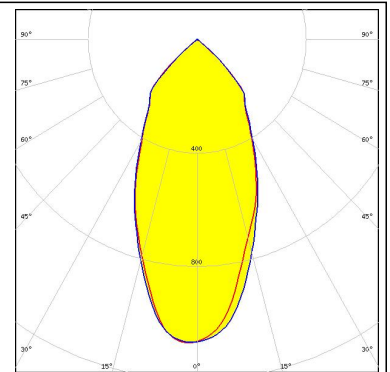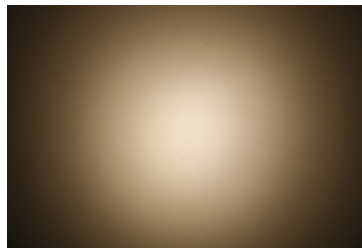



TRIDONIC

LED STARK SLE G2 LES23
FWHM 53.0°
Efficiency 90 %
Peak intensity 1.000 cd/lm
Required components:
TE: OPTIC CLIP Z50 TYPE1 2213194-1

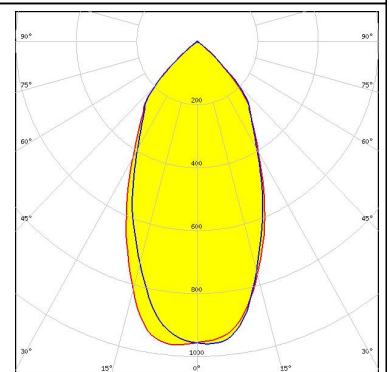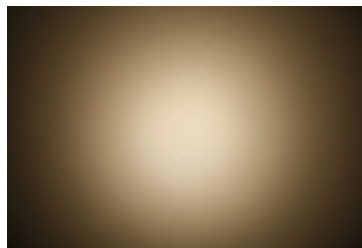



TRIDONIC

LED STARK SLE G2 LES26
FWHM 54.0°
Efficiency 89 %
Peak intensity 0.900 cd/lm
Required components:
TE: OPTIC CLIP Z50 TYPE1 2213194-1

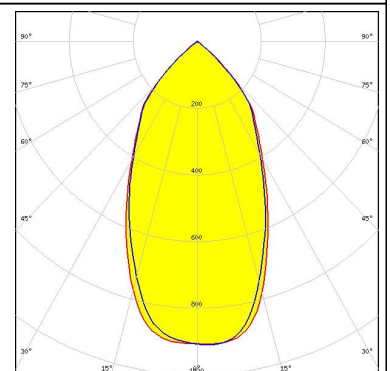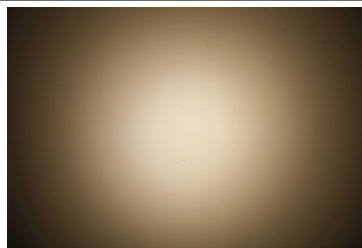

TRIDONIC



LED STARK SLE G3 LES19
FWHM 51.0°
Efficiency 92 %
Peak intensity 1.000 cd/lm
Required components:
TE: OPTIC CLIP Z50 TYPE1 2213194-1

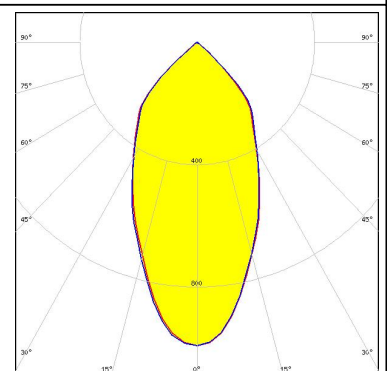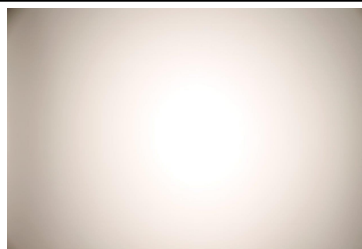

PHOTOMETRIC DATA (MEASURED):



TRIDONIC

LED STARK SLE G3 LES23
 FWHM 56.0°
 Efficiency 90 %
 Peak intensity 0.900 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

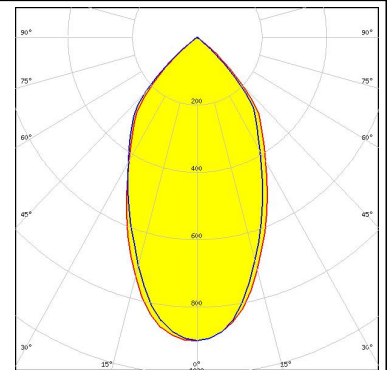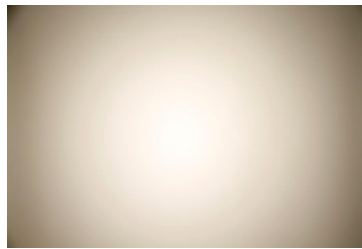



VS LIGHTING SOLUTIONS

LED WU-M-461
 FWHM 50.0°
 Efficiency 93 %
 Peak intensity 1.050 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

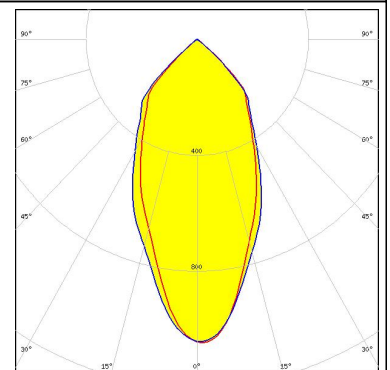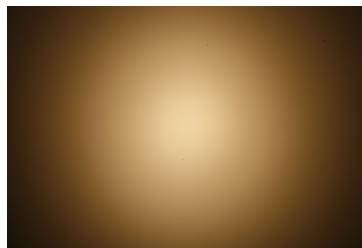



VS LIGHTING SOLUTIONS

LED WU-M-462
 FWHM 55.0°
 Efficiency 93 %
 Peak intensity 0.940 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

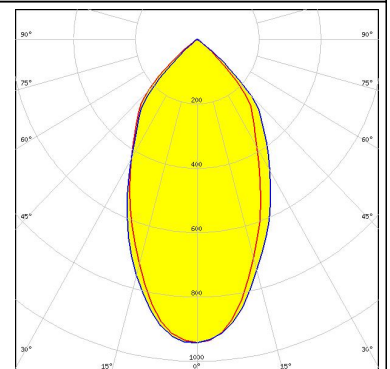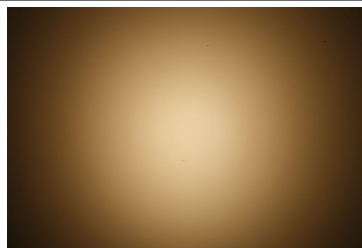
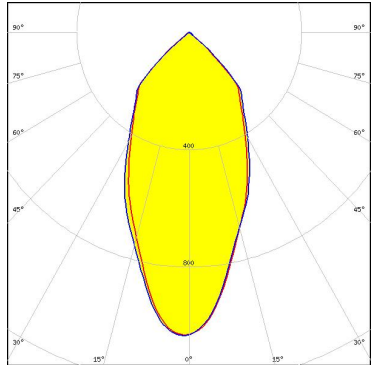
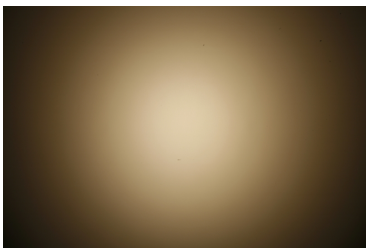
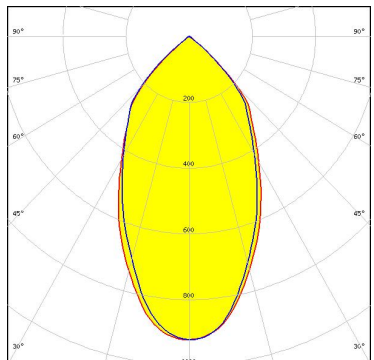
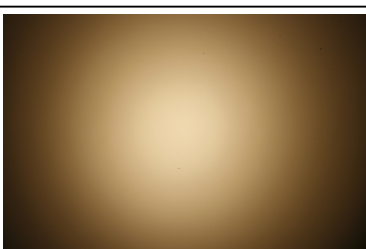
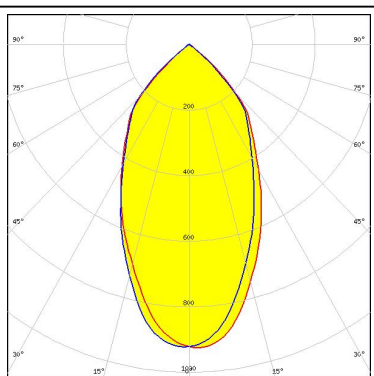


VS LIGHTING SOLUTIONS


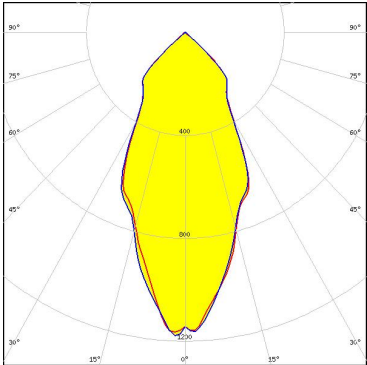

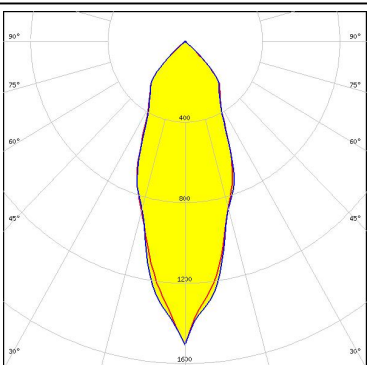

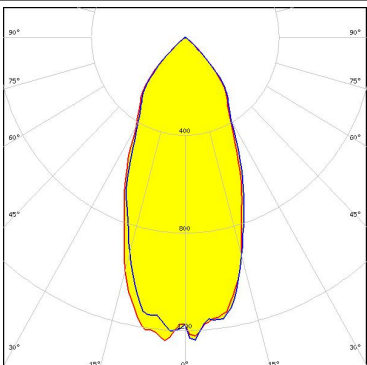

LED WU-M-464
 FWHM 55.0°
 Efficiency 93 %
 Peak intensity 0.940 cd/lm
 Required components:
 TE: OPTIC CLIP Z50 TYPE1 2213194-1

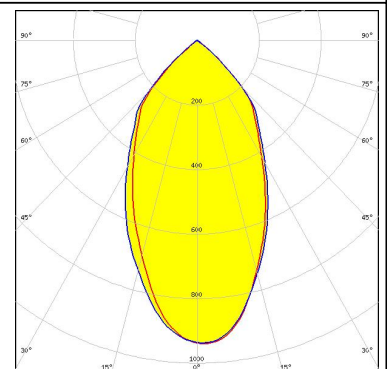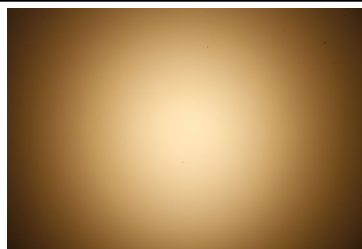

PHOTOMETRIC DATA (MEASURED):

<p>VS LIGHTING SOLUTIONS</p> <p>LED WU-M-484</p> <p>FWHM 51.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 1.040 cd/lm</p> <p>Required components:</p> <p>TE: OPTIC CLIP Z50 TYPE1 2213194-1</p>		
<p>VS LIGHTING SOLUTIONS</p> <p>LED WU-M-485</p> <p>FWHM 57.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 0.920 cd/lm</p> <p>Required components:</p> <p>TE: OPTIC CLIP Z50 TYPE1 2213194-1</p>		
<p>VS LIGHTING SOLUTIONS</p> <p>LED WU-M-486</p> <p>FWHM 56.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 0.930 cd/lm</p> <p>Required components:</p> <p>TE: OPTIC CLIP Z50 TYPE1 2213194-1</p>		

PHOTOMETRIC DATA (SIMULATED):

<p> bridgelux</p> <p>LED V10 Gen7 FWHM 50.0° Efficiency 93 % Peak intensity 1.190 cd/lm</p> <p>Required components: C13658_CLAMP-VERO13-18 Bender Wirth: 434 Typ L1</p>	
<p> bridgelux</p> <p>LED V13 Gen7 FWHM 38.0° Efficiency 93 % Peak intensity 1.507 cd/lm</p> <p>Required components: IDEAL: 50-2103CT + 50-2100AN</p>	
<p> bridgelux</p> <p>LED V22 Gen7 FWHM 43.0° Efficiency 94 % Peak intensity 1.279 cd/lm</p> <p>Required components: IDEAL: 50-2204-CT + 50-2100AN</p>	
<p> LUMINUS</p> <p>LED CXM-14 FWHM 52.0° Efficiency 92 % Peak intensity 1.000 cd/lm</p> <p>Required components: C13658_CLAMP-VERO13-18 Bender Wirth: 433 Typ L1</p>	

PHOTOMETRIC DATA (SIMULATED):



LED CXM-9
FWHM 45.0°
Efficiency 93 %
Peak intensity 1.100 cd/lm
Required components:
C13658_CLAMP-VERO13-18
Bender Wirth: 434 Typ L1




LED ZC12/18
FWHM 52.0°
Efficiency 92 %
Peak intensity 1.000 cd/lm
Required components:
C13658_CLAMP-VERO13-18
Bender Wirth: 433 Typ L1



LED ZC4/6
FWHM 45.0°
Efficiency 93 %
Peak intensity 1.100 cd/lm
Required components:
C13658_CLAMP-VERO13-18
Bender Wirth: 434 Typ L1



LED SLE G6 LES15
FWHM 50.0°
Efficiency 92 %
Peak intensity 1.100 cd/lm
Required components:
TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1

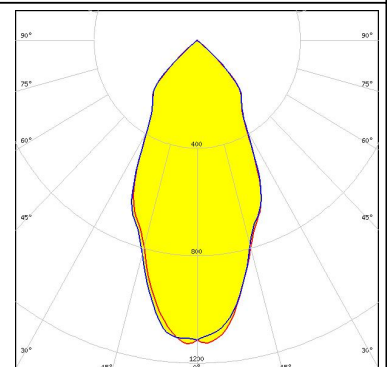

PHOTOMETRIC DATA (SIMULATED):

TRIDONIC

LED SLE G6 LES17


FWHM 52.0°

Efficiency 89 %

Peak intensity 1.060 cd/lm

Required components:

TE: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1

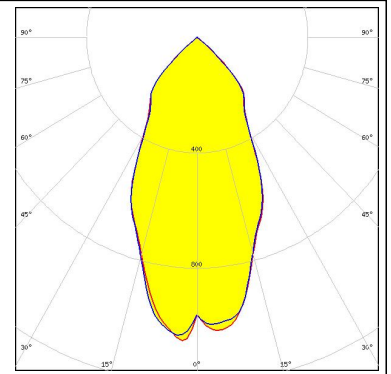

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

www.ledil.com/where_to_buy

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

www.ledil.com/where_to_buy