


LTR	REVISION	DATE	APPD
B	071122-HF01: ADDED P/N: F206CG6-0007	07-11-22	HF



ACTUAL SIZE

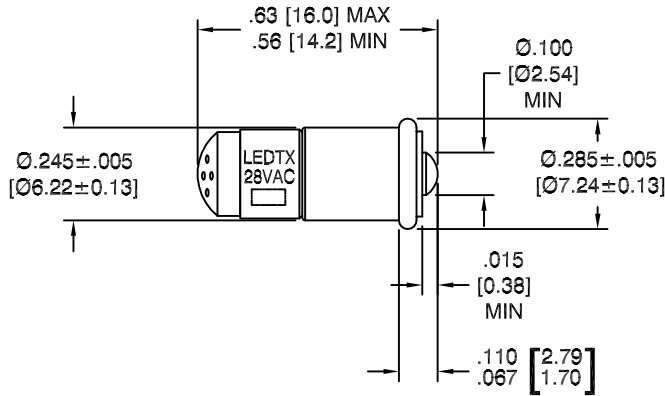

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE FR530
3. BASE MATERIAL: NICKEL PLATED BRASS
4. OPERATING TEMPERATURE: ~ -30°C TO ~ +50°C

**FULL BEAM WIDTH AT 50% INTENSITY

REVISION NOTIFICATION	
<input type="checkbox"/> DLC	
<input type="checkbox"/> UL/ETL	
<input type="checkbox"/> MADE IN USA	
<input type="checkbox"/> CUSTOMER _____	
<input type="checkbox"/> OTHER	
REDLINE CHECKLIST	
<input type="checkbox"/> REDLINE(YES)	
<input type="checkbox"/> DATE: _____	
<input type="checkbox"/> INITIATED BY: _____	
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>	
<input type="checkbox"/> WORK ORDER# _____	

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

F206CG6-0007	F206CG6-28VAC/20	HI-EFF GREEN	28Vac	0.40 W	0.016 A	0.11 cd	565	125°
F206CR6-0005	F206CR6-28VAC/20	HI-EFF RED	28Vac	0.36 W	0.013 A	-	635	160°
F206CY6-0010	F206CY6-28VAC/20	YELLOW	28Vac	0.48 W	0.017 A	-	585	160°
F206CLW7-0006	F206CLW7-28VAC	ULTRA LIME WHITE	28Vac	0.34 W	0.012 A	-	570/595	160°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	LUMINOUS INTENSITY	λP nm	VIEWING ANGLE**

 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary Information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.		TITLE F206CXXX-00XX (F206CXXX-28VAC/20)					
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32		DWG NO F206-28VAC	SCALE 2:1	SHEET 1 OF 1	DATE 03-03-15		
	CODE IDENT NO. 8Z410	DWG BY GP 03-03-15	CHK BY	QA SB 07-14-22	MFG LD 07-14-22	R&D UF 07-13-22		