


F873, Film, Metallized Polypropylene, Safety, 0.022 uF, 20%, 760 VAC (X1), 1500 VDC, 110°C, Lead Spacing = 22.5mm

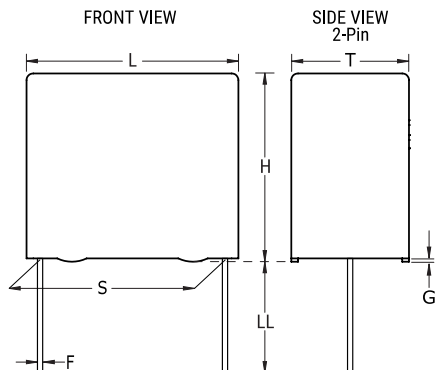

General Information	
Series:	F873
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	MKP EMI Safety
RoHS:	Yes
Lead:	Wire Leads
Qualifications:	ENEC, UL, cUL, CQC
AEC-Q200:	No
Miscellaneous:	ClimCat: 40/110/56/B.
Shelf Life:	104 Weeks

Dimensions	
L	26mm -0.5mm
H	14.5mm -0.5mm
T	6mm -0.5mm
S	22.5mm +0.6/-0.1mm
H0	18.5mm +/-0.5mm
F	0.8mm +/-0.05mm
G	0.5mm NOM

Specifications	
Capacitance:	0.022 uF
Capacitance Tolerance:	20%
Voltage AC:	760 VAC (X1)
Voltage DC:	1500 VDC
Temperature Range:	-40/+110°C
Rated Temperature:	110°C
Dissipation Factor:	0.1% 1kHz
Insulation Resistance:	30 GOhms
Max dV/dt:	300 V/us
Safety Class:	X1

Packaging Specifications	
Packaging:	T&R
Packaging Quantity:	300