



## Miniature circuit-breaker



Powering Business Worldwide™

**Part no.** FAZ-C20/3  
**Article no.** 278874  
**Catalog No.** FAZ-C20/3

### Delivery programme

Basic function			Miniature circuit-breakers
Pole			3 pole
Tripping characteristic			C
Application			Switchgear for industrial and commercial applications
Rated current	$I_n$	A	20
Rated switching capacity acc. to IEC/EN 60947-2		kA	15
Product range			FAZ

### Approvals

Product Standards	IEC/EN 60947-2; IEC/EN 60898; UL 1077; CSA-C22.2 No. 235; CE marking
UL File No.	E177451
UL Category Control No.	QVNU2, QVNU8
CSA File No.	204453
CSA Class No.	3215-30
North America Certification	UL recognized, CSA certified
Conditions of Acceptability	Supplementary Protector only
Suitable for	Branch Circuits; not as BCPD
Current Limiting Circuit-Breaker	No
Max. Voltage Rating	480Y/277 VAC
Degree of Protection	IEC: IP20; UL/CSA Type: -

### Electrical

Standards			IEC/EN 60947-2 IEC/EN 60898
Rated operational voltage	$U_e$	V	
	$U_e$	V AC	230/400
		V DC	48 (per pole)
Rated switching capacity acc. to IEC/EN 60947-2		kA	15
Operational switching capacity		kA	7.5
Characteristic			B, C, D
Max. back-up fuse		A gL/ gG	125
Selectivity Class			3
Lifespan	Operations		> 10000
Direction of incoming supply			as required

### Mechanical

Standard front dimension		mm	45
Enclosure height		mm	80
Terminal protection			Finger and back-of-hand proof to BGV A2
Mounting width per pole		mm	17.5
Mounting			IEC/EN 60715 top-hat rail
Protection type			IP20, IP40 (when fitted)
Terminals top and bottom			Twin-purpose terminals
Terminal capacities		mm <sup>2</sup>	
		mm <sup>2</sup>	1 x 25
		mm <sup>2</sup>	2 x 10
Thickness of busbar material		mm	0.8 ... 2
Mounting position			As required


### Technical data ETIM 5.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)  
 Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB)  
 (eci@ss8-27-14-19-01 [AAB905010])


Release characteristic			C
Number of poles (total)			3
Rated current		A	20
Rated voltage		V	400
Rated short-circuit breaking capacity EN 60898		kA	15
Rated short-circuit breaking capacity IEC 60947-2		kA	15
Voltage type			AC
Current limiting class			3
Frequency		Hz	50
Concurrently switching N-neutral			No
Over voltage category			3
Pollution degree			2
Width in number of modular spacings			3
Built-in depth		mm	70.5
Additional equipment possible			Yes
Degree of protection (IP)			IP20


## Characteristics


Characteristic curves			
-----------------------	--	--	--

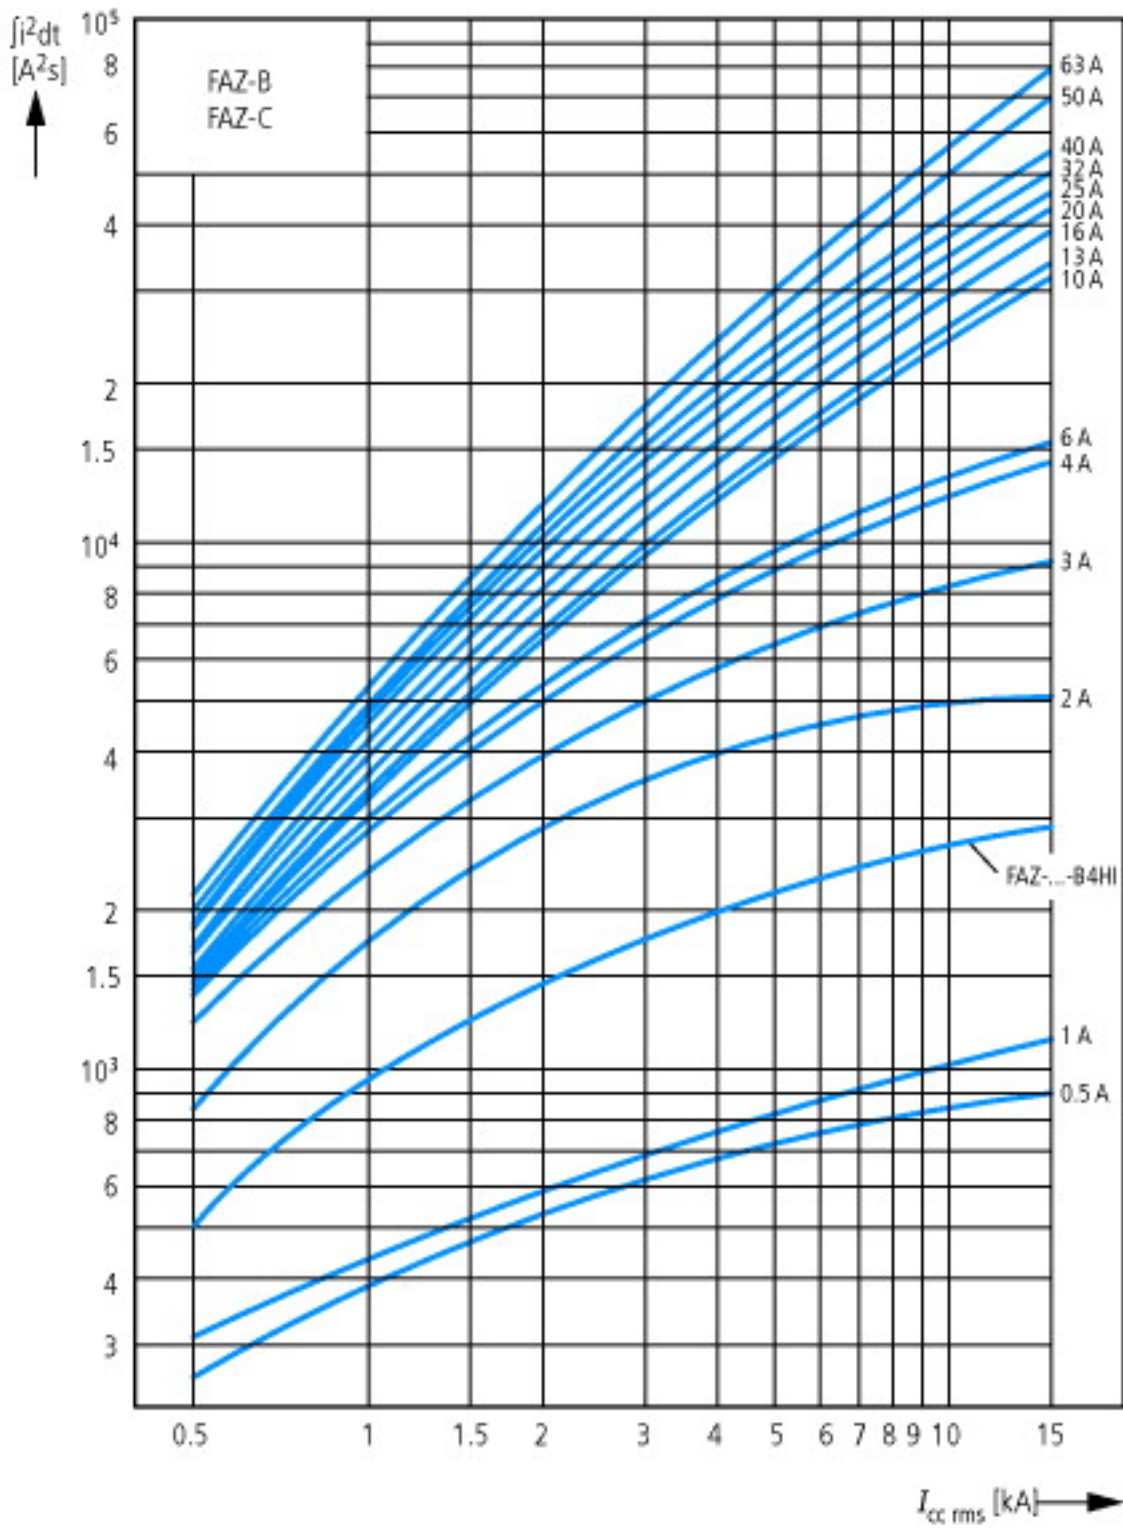


Let-through energy  $\int i^2 dt$   
According to IEC/EN 60898

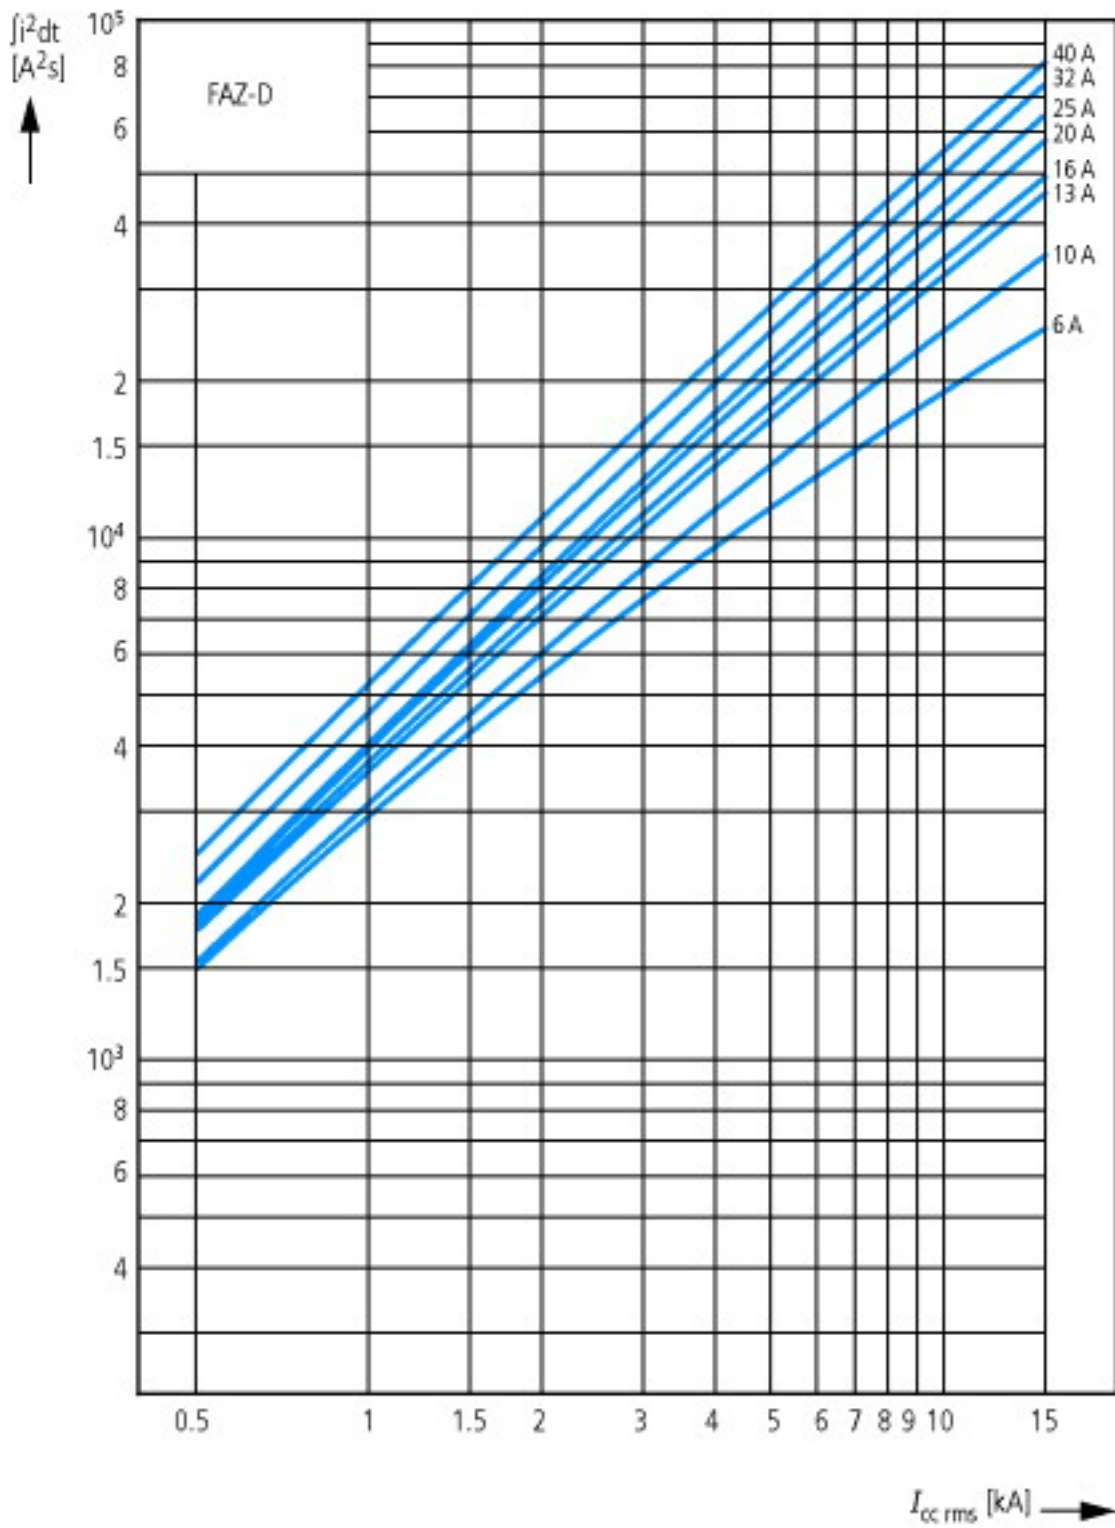

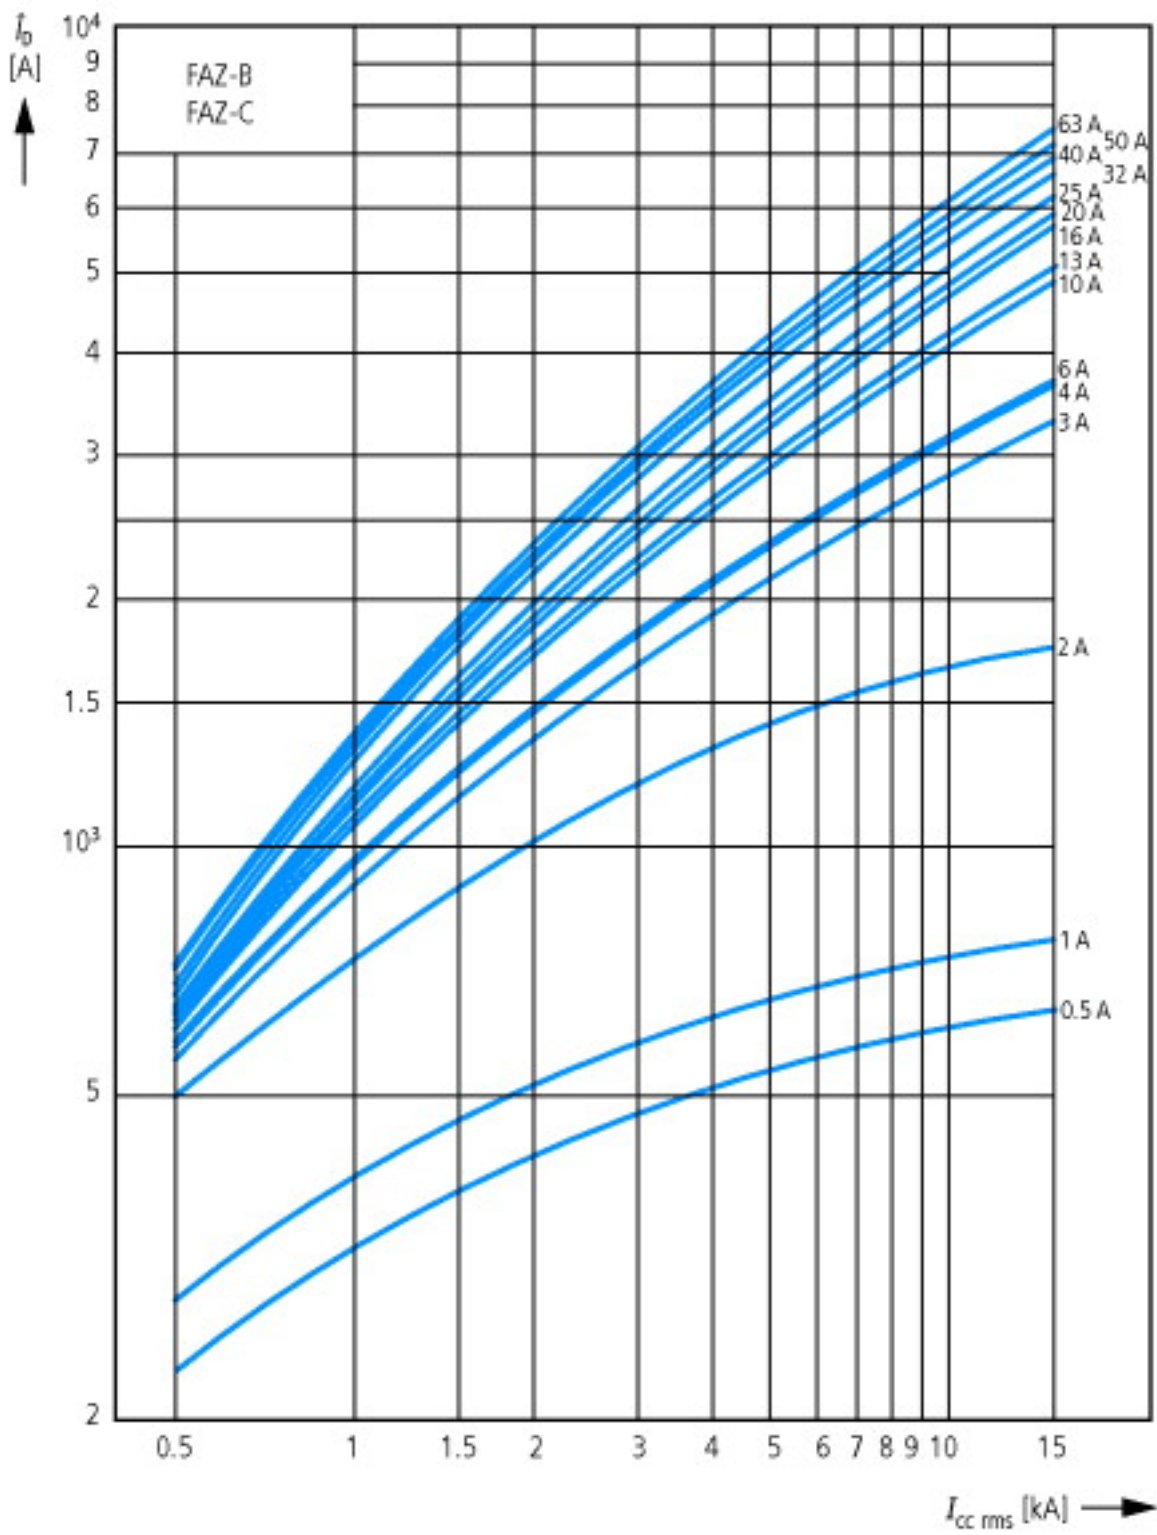


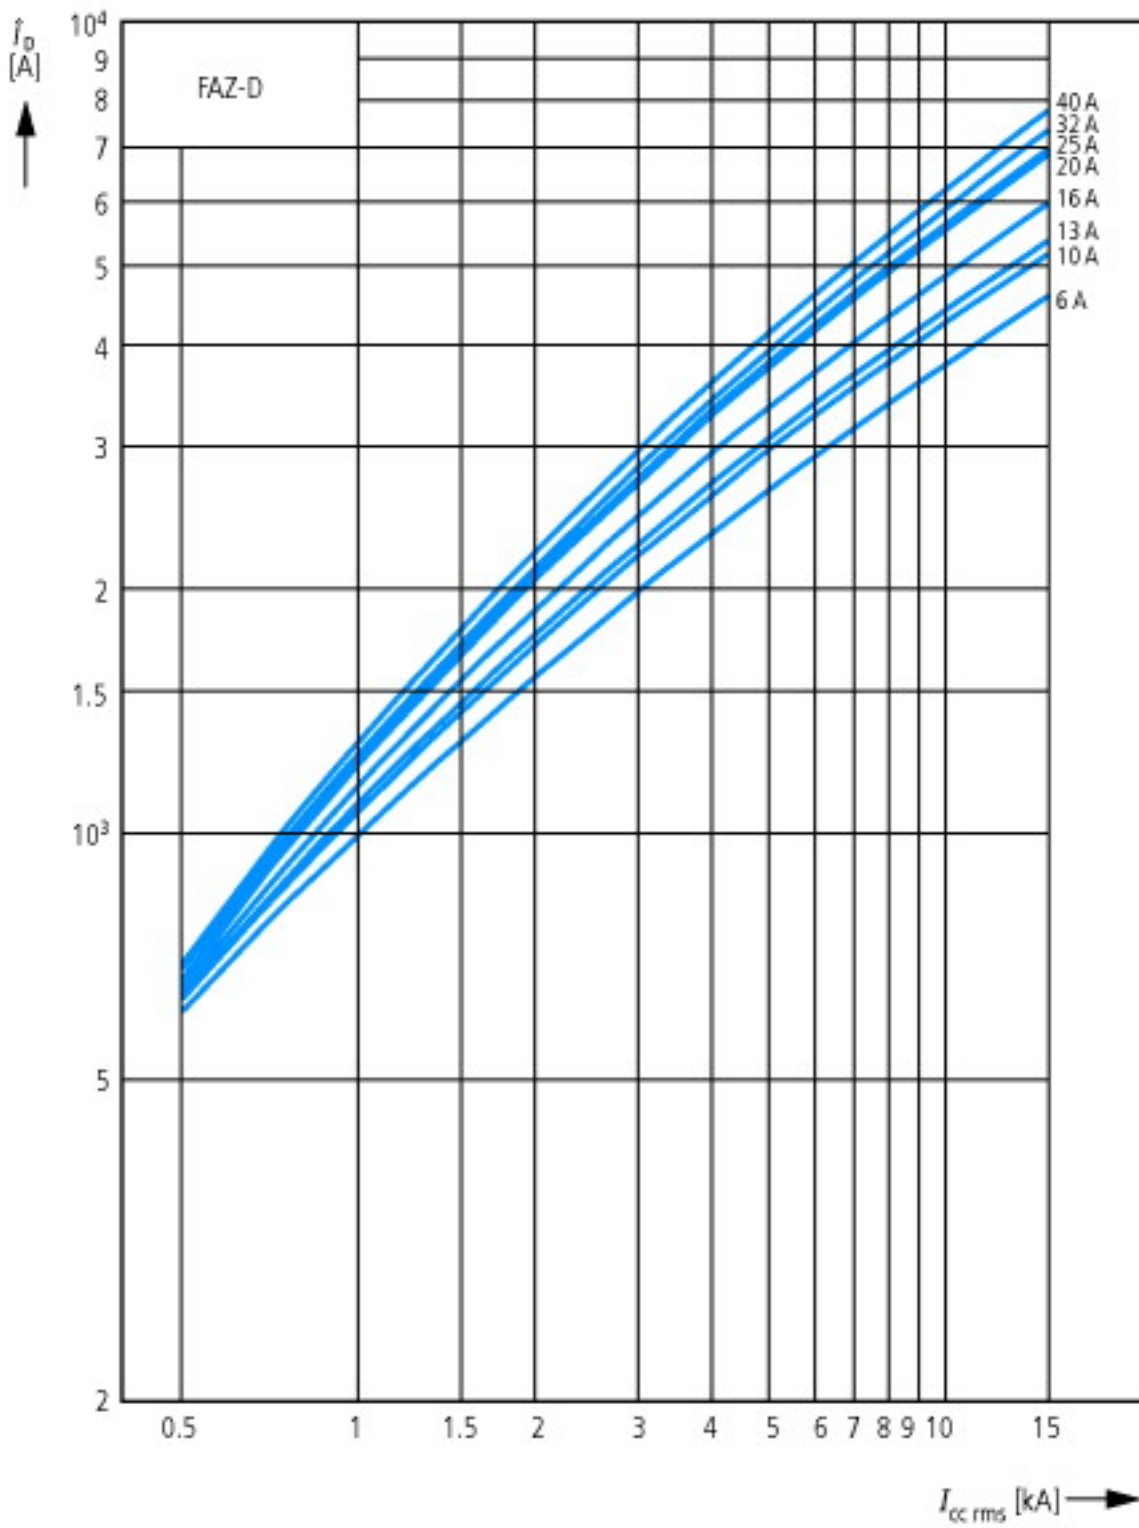

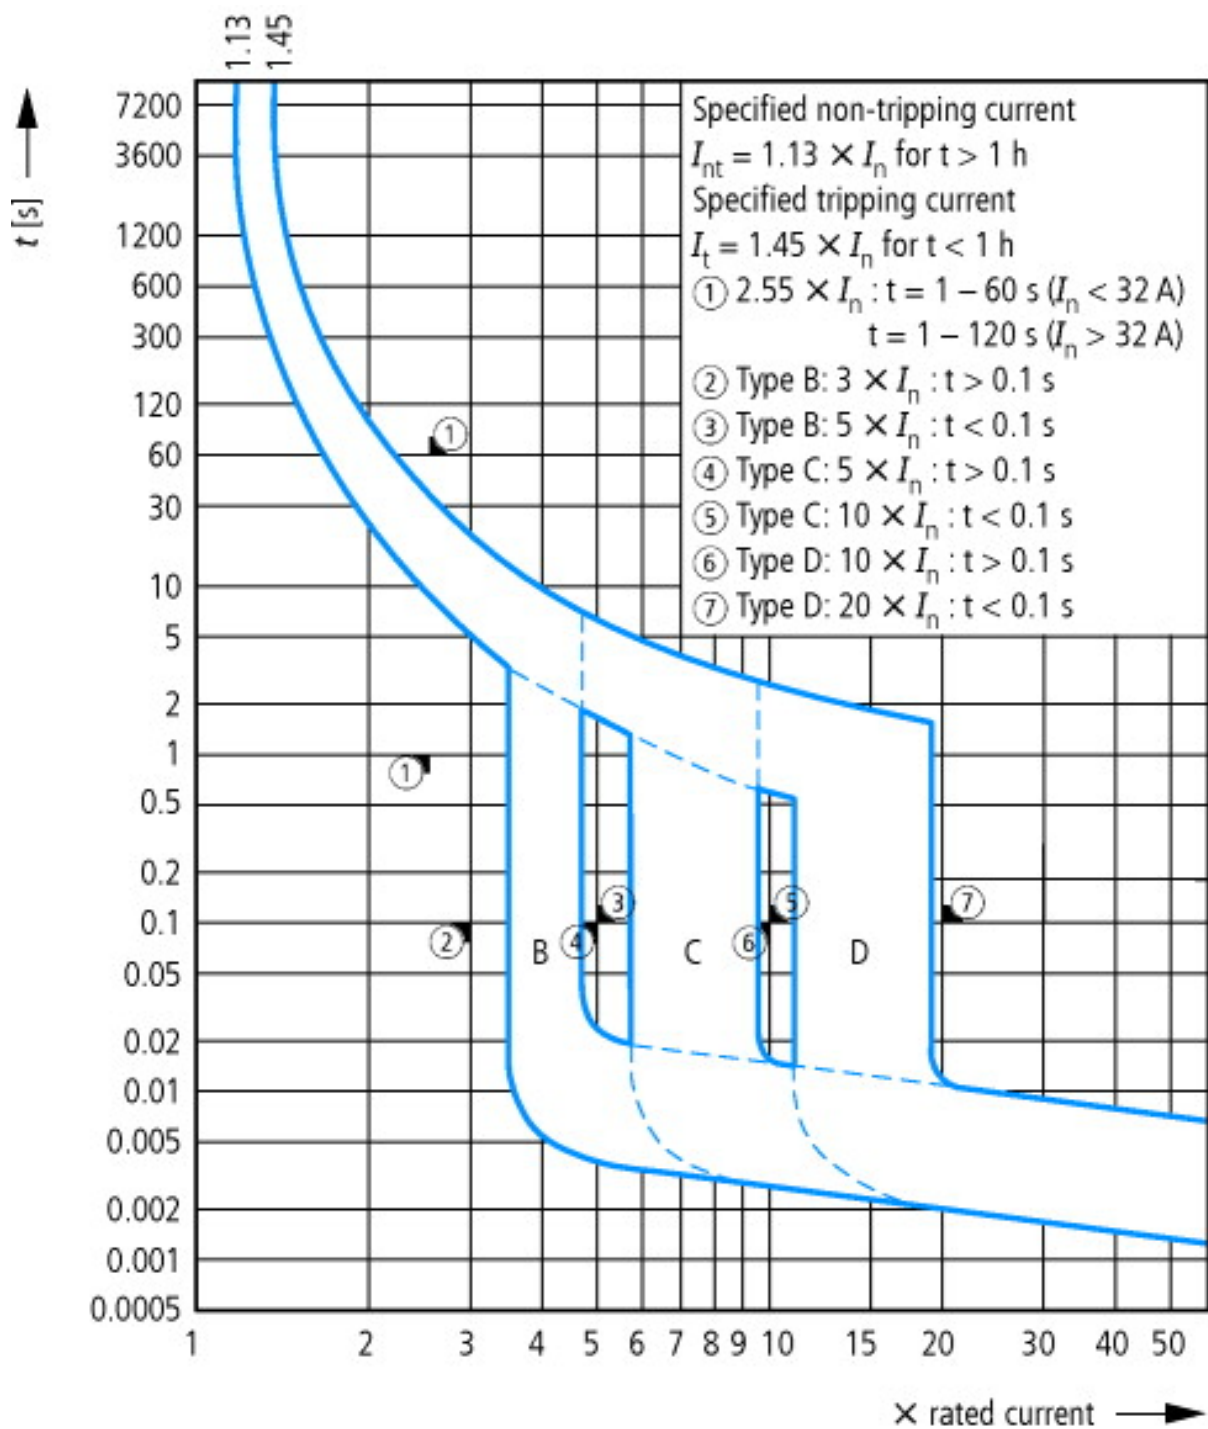

Tripping characteristic at 30 °C:  
 B, C, D to IEC/EN 60898

## Dimensions

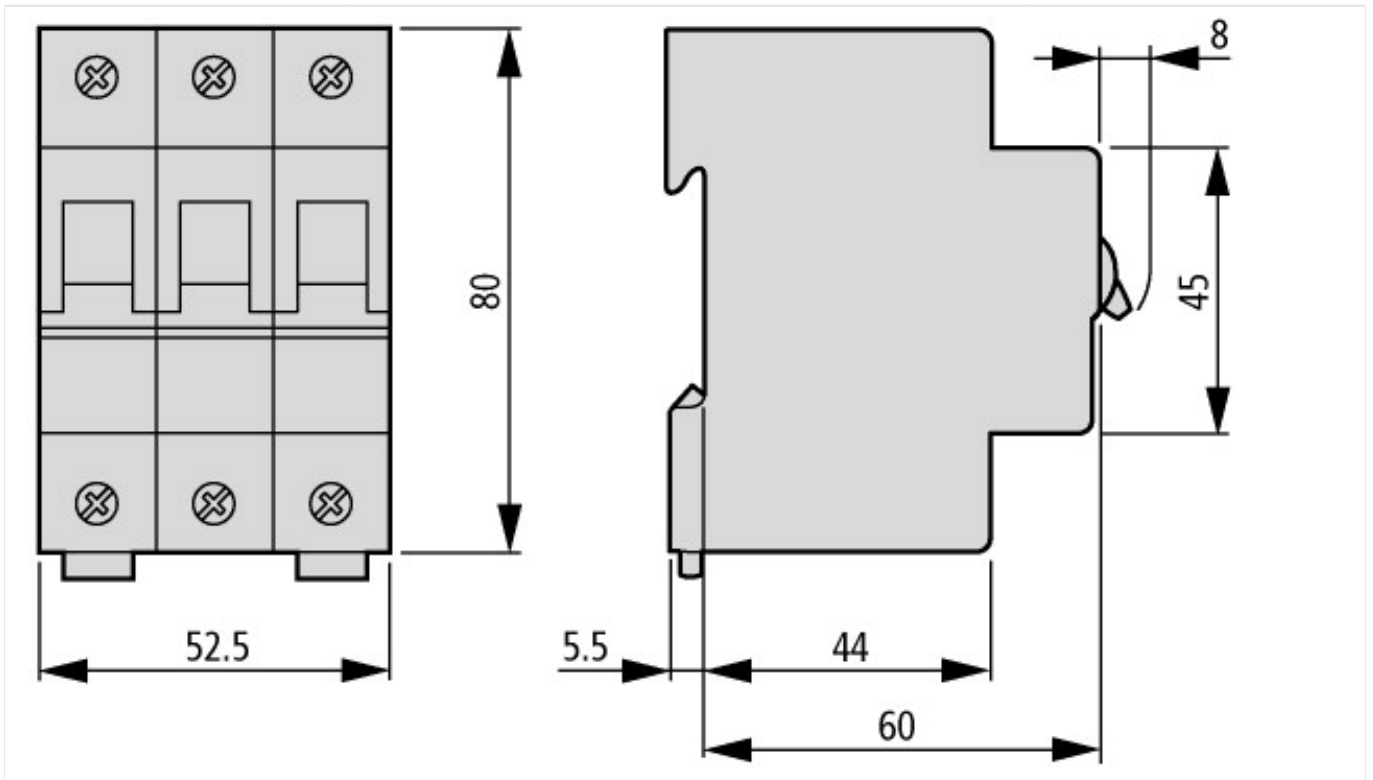

#### Additional product information (links)

**AWA1220-1755 Circuit-breaker**

AWA1220-1755 Circuit-breaker

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/17550701.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17550701.pdf)