


LTR	REVISION	DATE	APPD
D	021114-GP01: REMOVED RIVET CAP	03-24-14	GP



ACTUAL SIZE

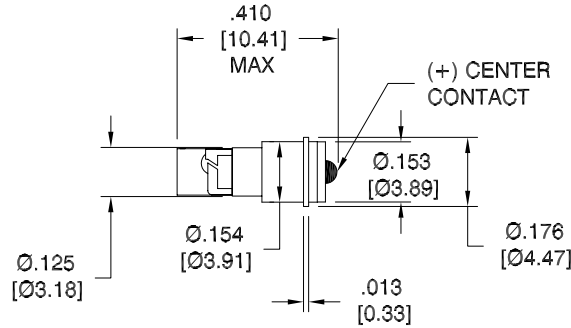

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: DELRIN
3. BASE MATERIAL: NICKEL PLATED BRASS (BODY BASE) BAKELITE (INSULATOR)
4. RIVET CAP MATERIAL: BRASS, GRADE B, .0005 THK.  
FINISH: NICKEL PLATE PER MIL SPEC MIL-C-26074
5. OPERATING TEMPERATURE: ~-30°C TO ~+50°C

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

ELECTRO-OPTICAL CHARACTERISTICS (Ta = 25°C)

LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λ P nm COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)
FF120-0AG-028P	AQUA GREEN	28Vdc	0.280 W	0.010 A	0.200cd	520	105°
FF120-0CW-028P	COOL WHITE	28Vdc	0.280 W	0.010 A	0.100cd	8000K	105°
FF120-0UG-028P	SUPER GREEN	28Vdc	0.336 W	0.012 A	0.022cd	574	105°
FF120-0UO-028P	SUPER ORANGE	28Vdc	0.336 W	0.012 A	0.051cd	611	120°
FF120-0UR-028P	SUPER RED	28Vdc	0.336 W	0.012 A	0.033cd	633	105°
FF120-0UY-028P	SUPER YELLOW	28Vdc	0.336 W	0.012 A	0.015cd	594	120°



**-PROPRIETARY-**  
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5  
.XX ± .025 (UNLESS OTHERWISE STATED)  
ANGLES ± 0°,30'  
FRACT. ± 1/32

TITLE <b>FF120-0XX-028P</b>					
DWG NO FF120-28V-P		SCALE 2:1	SHEET 1 OF 1	DATE 07-17-07	
CODE IDENT NO. 8Z410	DWG BY GP 07-17-07	CHK BY	QA	MFG	R&D BJ 03-24-14