






REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	LJC 09/04/08'
B	ADD PACKING TYPE	JLZ 04/02/15'	HZW 04/02/15'	LJC 04/02/15'
C	DRAWING UPDATE	JLZ 04/18/16'	HZW 04/18/16'	LJC 04/18/16'


N=4~34 D=5.2
N=35~60 D=5.75

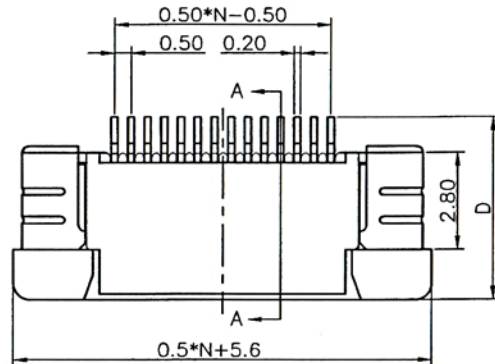


SECTION A-A

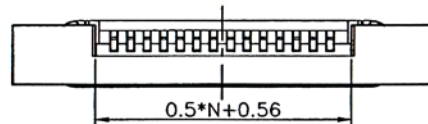


N=No. OF CONTACTS



Lower Contact Side



Upper Contact Side

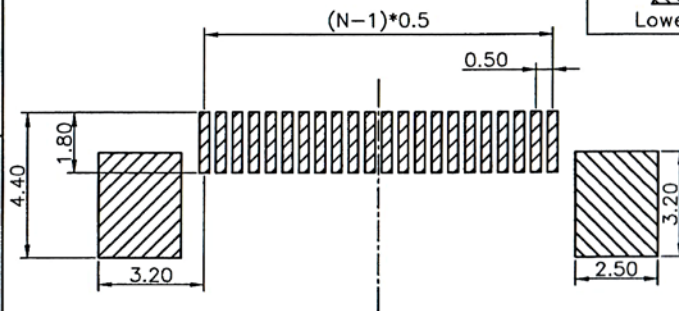

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

NOTES:

1. MATERIAL

INSULATOR: THERMOPLASTI(UL 94V-0)

CONTACT: COPPER ALLOY

2. SPECIFICATION

TEMPERATURE: -40°C ~ +105°C

CONTACT RESISTANCE: 30mΩ max.

INSULATION RESISTANCE: 100MΩ min

DWV: AC 100V PER MINUTE

3. PART NUMBER:

FFC5-xx-Hy-TR

1 2

Option 1 (xx) Number of Positions


~04 to 31

Option 2 (y) Contact Orientation

U = Upper

L = Lower

Please note some position/orientation may be subject to MOQ

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		0.50mm FPC CONNECTOR R/A SMT TYPE		
X.	±0.60	X.	±5°	UNITS	mm					
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	 the vital component			
.XX	±0.25	.XX	±2°							
DRAWING TYPE		CUSTOMER								
SCALE		1:1	SHEET	1 OF 1						
DRAWING NO.		C-XXXXX-C								

the **vital**
component