



Product Name	FI-W5S
Status	Active
RoHS compliant	Yes
Series Name	FI Series
Contact spacing (mm)	1.25
Number of rows	2
Number of contacts	5
Connector types	Cable side plug housing
PCB mounting type	-
PCB mounting method	-
Wire termination method	Crimp
Applicable wire	Discrete wire
Applicable wire size	
Applicable wire insulation diameter (mm)	
Remarks on applicable wire	
Material of contact	-
Finish of contact in connecting area	-
Finish of contact in terminal area	-
Finish of contact in PCB mounting area	-
Shell, Material/ Finish	
Material of housing	Glass filled Nylon (UL94V-0)
PCB side connector styles	-
PCB mounted height (mm)	-
Applicable contacts	FI-C3-A1-15000
Applicable product part numbers	
Packing type	
Quantity in the standard packing	
Remarks	
Related Documents	DWG 87Kbytes
Pair	FI-W5P-HFE FI-W5P-HFE-E1500

SJ031212
(CON. EN. DRAWING NO.)

SYM. 版数	DESCRIPTION 変更内容	DATE 年月日	DRAWN 製図	CHECKED 担当	APP'D 表紙	APP'D 承認


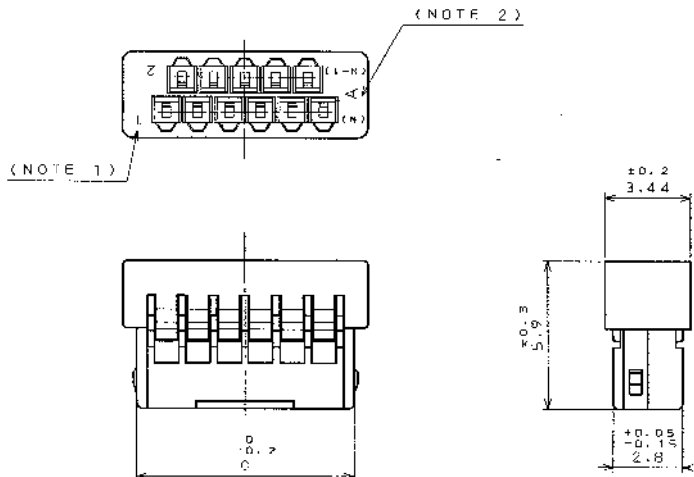


TABLE 1

NO. OF CONTACTS (N)	A	B	C
5	6	2.5	4.9
7	7.25	3.75	6.15
9	8.5	5	7.4
11	9.75	6.25	8.65

NOTE 1. NUMBER OF CONTACTS APPEARS IN RAISED LETTERS.
2. TOOLING MARK APPEARS IN RAISED LETTERS.

- この面に端子番号を浮き出す。
- この面に金型マークを浮き出す。



1	HOUSING	1	GLASS FILLED 6-GNY	UL94V 0 BLACK
ITEM 符号	DESCRIPTION 名称	Q'TY 個数	MATERIAL 材料	FINISH 仕上
仕様書 (REFERENCE DOCUMENT)		第1版 (DATE) 5. Aug. 96	尺度 (SCALE) 5:1	REMARKS 備考
公差 (GENERAL TOLERANCE)		製図 (DR.)	名称 (TITLE) F I - W ※ ※ S	参考 (REFERENCE) Reference Only
寸法 (DIMENSION)	角度 (ANGLES)	検査 (CHK.) K. HISAMATSU	HOUSING ハウジング	製作者 (AUTHOR) 日本航空電子工業株式会社
. ±0.8	° ±	承認 (APP.) K. Horaki	シリーズ (SERIES) =	図面番号 (DRAWING NO.) SJ031212
.X ±0.4	°X ±	承認 (APP.)		版数 (EDITION)
.XX ±0.1	°XX ±			
.XXX ±	°XXX ±			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO JAE AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.
本図面は日本航空電子工業(株)の所有する情報を含むもので当社の許可なく複製を禁止する。

DDF-D-212B (REV. 03)

0 10 20 30 40 50 60 70 80 90 100

DDF-D-212B (REV. 03)

SIZE A3

版数