

FMM5056VF

5.8-7.2GHz Power Amplifier MMIC


FEATURES

- High Output Power: 34.0dBm(typ.)
- High Linear Gain: 28.0dB(typ.)
- Low VSWR
- Broad Band: 5.8 ~ 7.2GHz
- Impedance Matched $Z_{in}/Z_{out} = 50\Omega$
- Small Hermetic Metal-Ceramic Package(VF)

DESCRIPTION

The FMM5056VF is a MMIC amplifier that contains a four-stage amplifier, internally matched, for standard communications band in the 5.8 to 7.2GHz frequency range.

Eudyna stringent Quality Assurance Program assures the highest reliability and consistent performance.

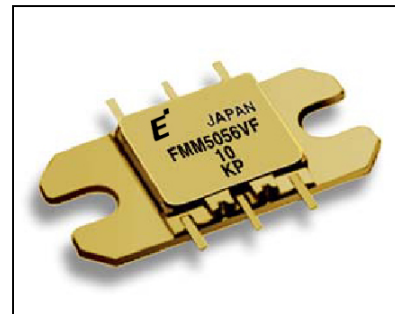

ABSOLUTE MAXIMUM RATINGS (Case Temperature $T_c=25^\circ\text{C}$)

Item	Symbol	Rating	Unit
DC Input Voltage	V_{DD}	12	V
DC Input Voltage	V_{GG}	-7	V
Input Power	P_{in}	12	dBm
Storage Temperature	T_{stg}	-55 to +125	$^\circ\text{C}$

Recommended Operating Condition

Item	Symbol	Condition	Unit
DC Input Voltage at $T_c=25^\circ\text{C}$	V_{DD}	10	V
Input Power at $T_c=25^\circ\text{C}$	P_{in}	10	dBm
DC Input Current at $T_c=25^\circ\text{C}$	I_{DD}	≤ 1200	mA
Operating Case Temperature	T_c	-40 to +85	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS (Case Temperature $T_c=25^\circ\text{C}$)

Item	Symbol	Test Conditions	Limit			Unit
			Min.	Typ.	Max.	
Frequency Range	f		5.8 - 7.2			GHz
Output Power at 1dB G.C.P.	P_{1dB}	$V_{DD}=10V$ $V_{GG}=-5V$ $f=5.8$ to 7.2GHz	32.0	34.0	-	dBm
Power Gain at 1dB G.C.P.	G_{1dB}		25.0	28.0	-	dB
Gain Flatness	ΔG		-	2.4	4.0	dB
Input VSWR	$VSWR_i$		-	2 : 1	2.6 : 1	-
Output VSWR	$VSWR_o$		-	2 : 1	-	-
DC Input Current	I_{DD}	$V_{DD}=10V, V_{GG}=-5V$	-	1100	1200	mA
DC Input Current	I_{GG}		-	5.0	15.0	mA
Channel Temperature Rise	ΔT_{ch}		-	50	-	$^\circ\text{C}$

CASE STYLE: VF

Note: G_{1dB} is referenced to Linear Gain measured at $P_{in}=-5\text{dBm}$

G.C.P.: Gain Compression Point

ESD	Class 0	~ 199 V
-----	---------	---------


Note : Based on EIAJ ED-4701 C-111A($C=100\text{pF}$, $R=1.5\text{k}\Omega$)

Eudyna


FMM5056VF

5.8-7.2GHz Power Amplifier MMIC


OUTPUT POWER vs. FREQUENCY

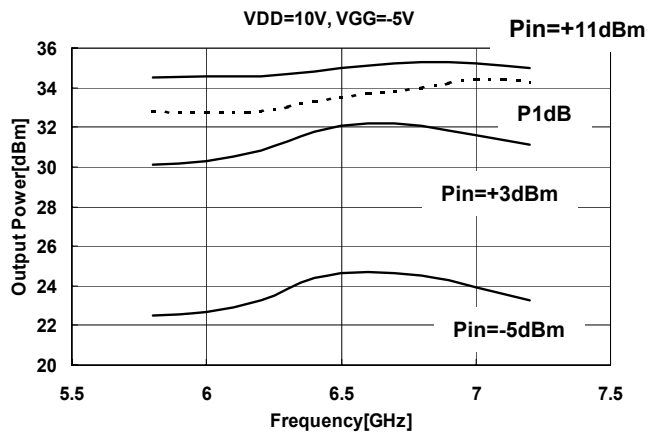


OUTPUT POWER, POWER ADDED EFFICIENCY vs. INPUT POWER

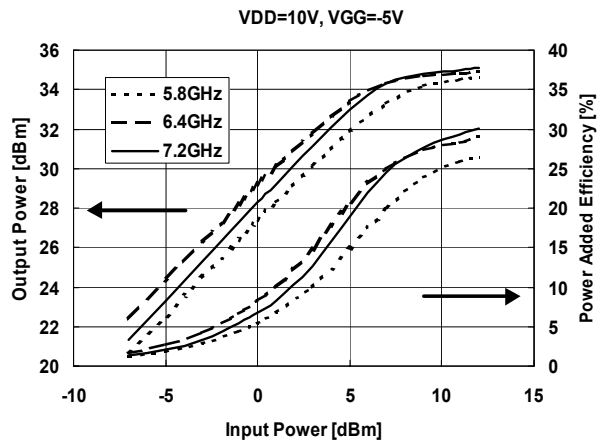

IMD vs. OUTPUT POWER(S.C.L.)

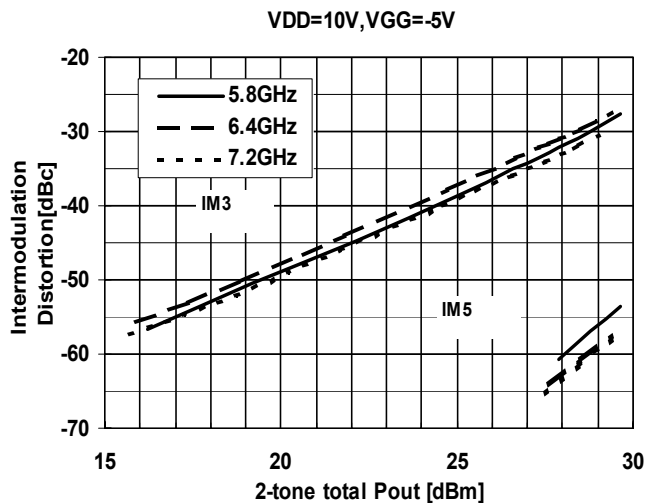


VSWR vs. FREQUENCY

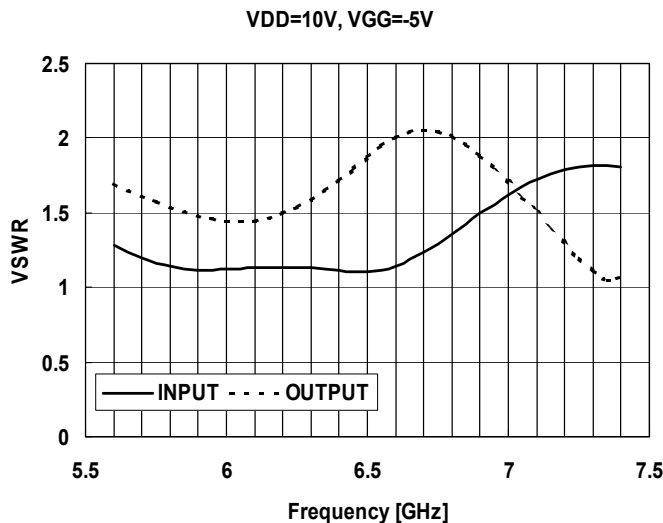


FMM5056VF

5.8-7.2GHz Power Amplifier MMIC


DRAIN CURRENT vs OUTPUT POWER

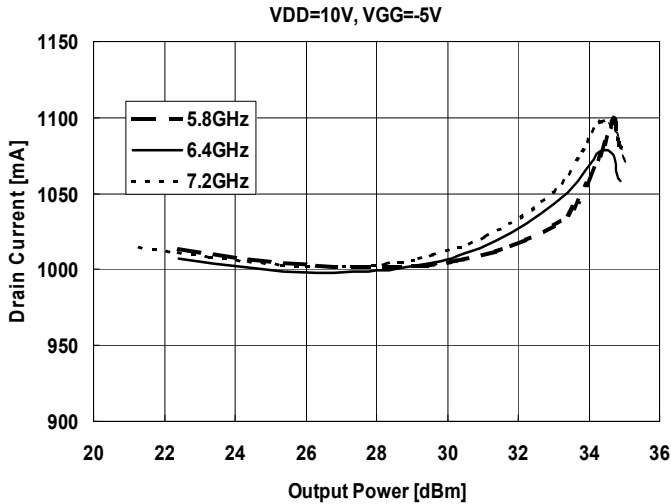


AMPM vs OUTPUT POWER

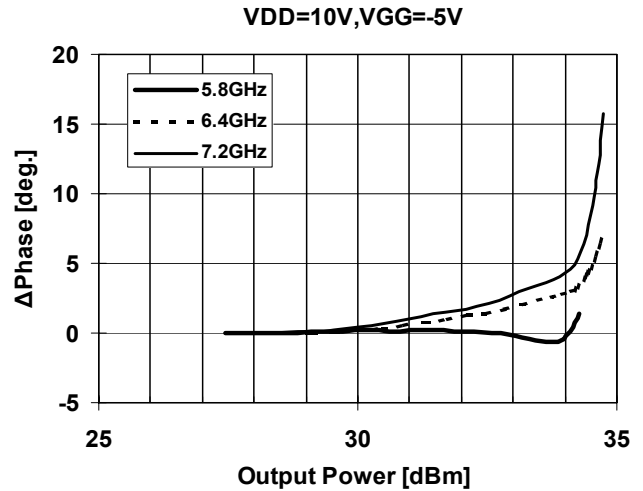

OUTPUT POWER vs. DRAIN VOLTAGE

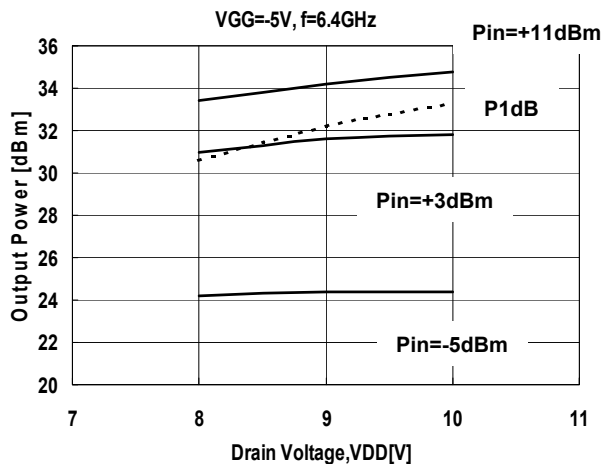


DRAIN CURRENT vs OUTPUT POWER

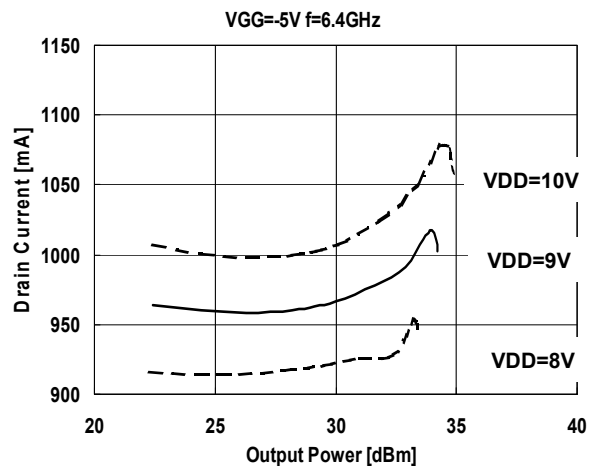


FMM5056VF

5.8-7.2GHz Power Amplifier MMIC


OUTPUT POWER , POWER ADDED EFFICIENCY vs. INPUT POWER

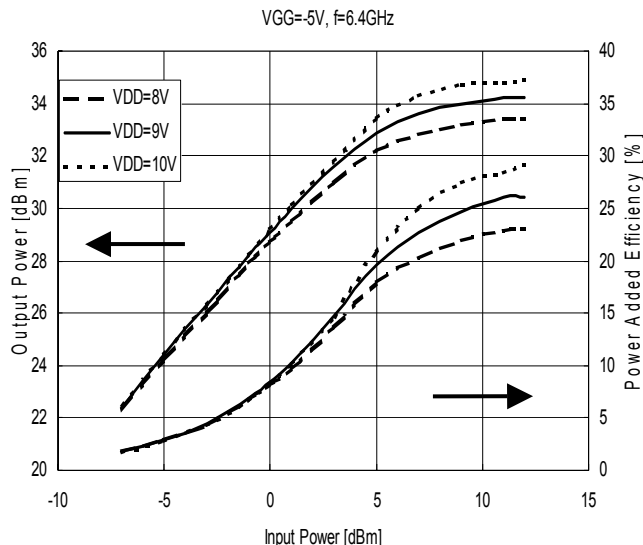


OUTPUT POWER , POWER ADDED EFFICIENCY vs. INPUT POWER

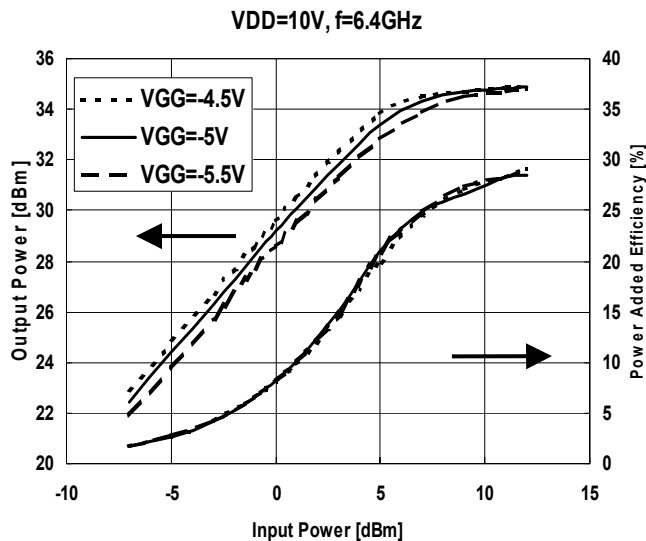

DRAIN CURRENT vs OUTPUT POWER

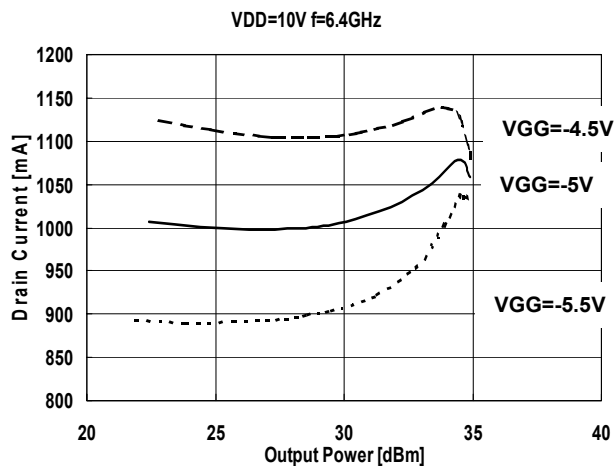



OUTPUT POWER vs. GATE VOLTAGE

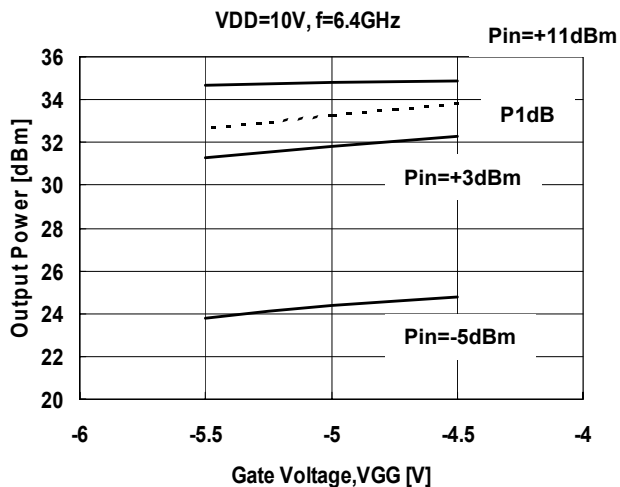

FMM5056VF

5.8-7.2GHz Power Amplifier MMIC

■ S-PARAMETER

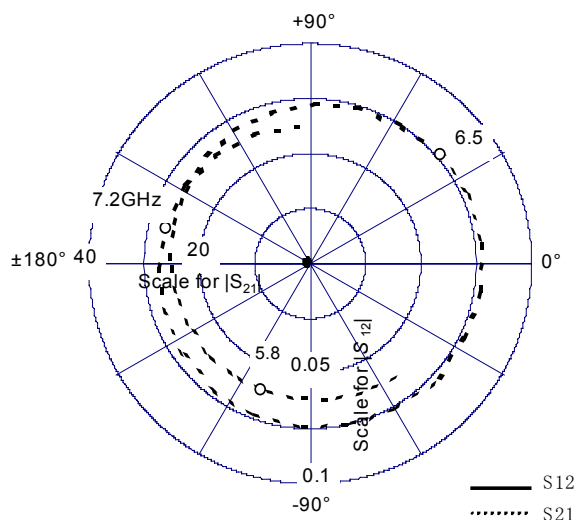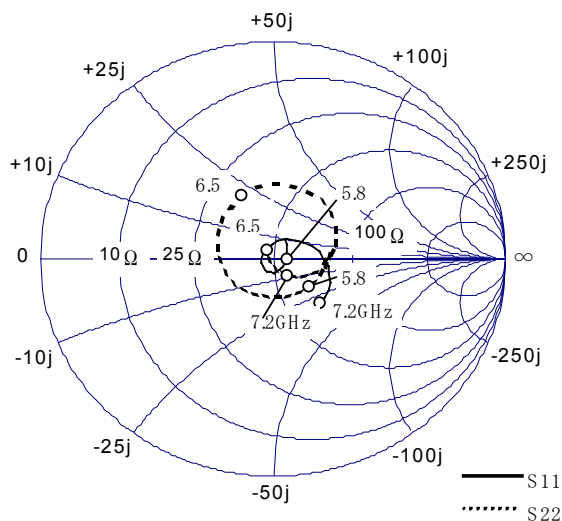

VDD=10.0V, VGG=-5.0V


Frequency [GHz]	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
5.6	0.11	60.30	25.75	-53.50	0.0013	-167.09	0.24	3.68
5.7	0.08	36.46	24.87	-83.02	0.0013	-168.43	0.22	-16.53
5.8	0.06	3.99	24.46	-111.49	0.0011	-159.93	0.20	-39.28
5.9	0.05	-32.63	24.49	-139.66	0.0012	-157.97	0.19	-65.48
6	0.06	-63.96	24.97	-167.78	0.0013	-154.12	0.18	-95.80
6.1	0.06	-89.50	25.80	163.81	0.0014	-154.94	0.19	-127.81
6.2	0.06	-113.38	27.01	134.51	0.0016	-156.94	0.21	-159.39
6.3	0.06	-140.43	28.37	104.22	0.0018	-161.66	0.24	170.47
6.4	0.05	178.94	29.70	72.78	0.0021	-170.22	0.28	141.84
6.5	0.05	121.67	30.74	40.05	0.0024	-178.69	0.32	114.82
6.6	0.08	74.14	31.19	6.88	0.0026	169.54	0.34	88.83
6.7	0.13	42.82	31.06	-26.88	0.0026	157.81	0.34	63.73
6.8	0.18	19.89	30.58	-60.37	0.0026	144.13	0.32	40.09
6.9	0.22	0.51	29.67	-93.74	0.0026	132.25	0.29	17.13
7	0.25	-16.23	28.78	-127.22	0.0024	118.43	0.23	-4.92
7.1	0.28	-31.24	27.80	-160.64	0.0020	110.25	0.17	-27.22
7.2	0.29	-45.18	26.86	165.59	0.0017	98.22	0.09	-51.99
7.3	0.29	-58.16	25.84	130.81	0.0014	91.48	0.02	-122.39

Eudyna

FMM5056VF

5.8-7.2GHz Power Amplifier MMIC

■ Recommended Bias Circuit and Internal Block Diagram

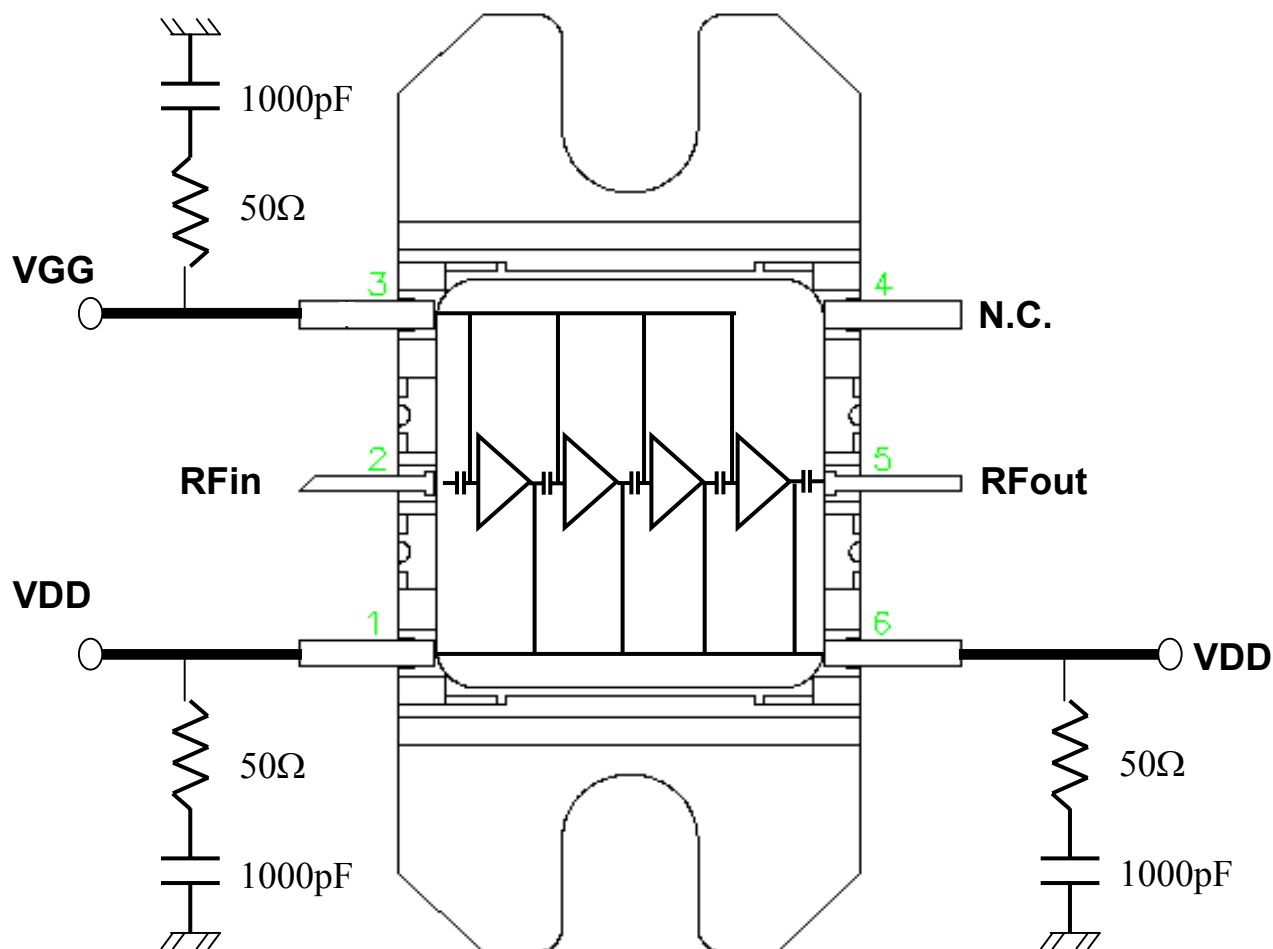

Note 1: The RC networks are recommended on the bias supply lines, close to the package, to prevent video oscillations which could damage the module.

Note 2: Bias point VDD can be connected at the input side or at the output. The two pins named VDD are internally connected.

PIN ASSIGNMENT

- 1 : VDD
- 2 : RF in
- 3 : VGG
- 4 : N.C.
- 5 : RF out
- 6 : VDD

5.8-7.2GHz Power Amplifier MMIC

[illegible]

1 : VDD
2 : RF in
3 : VGG
4 : N.C.
5 : RF out
6 : VDD

Eudyna

FMM5056VF

5.8-7.2GHz Power Amplifier MMIC

Eudyna