
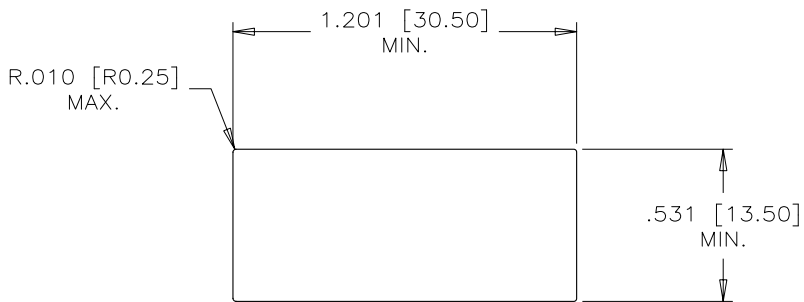
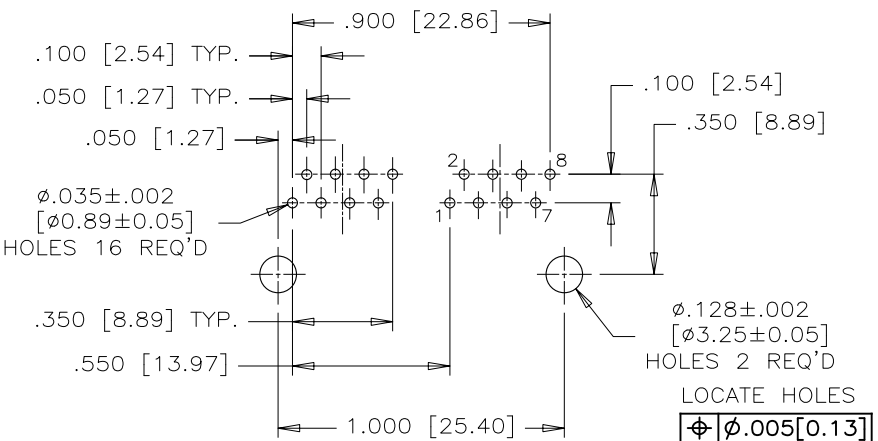
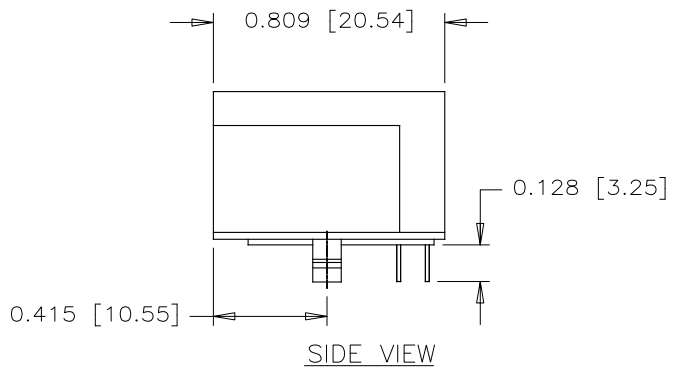


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	RELEASE DRAWING	MAY19/21	L.CHAN

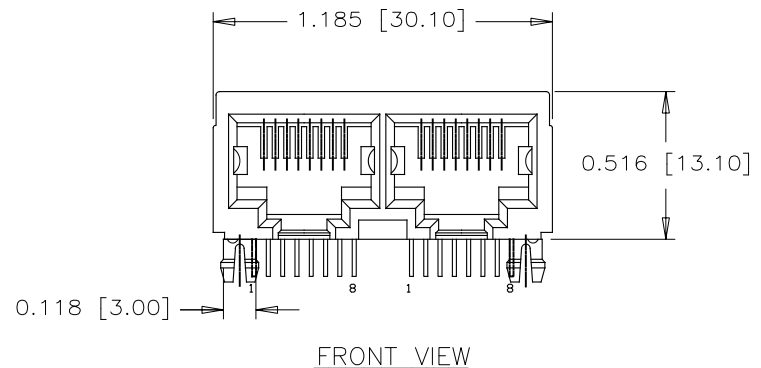

MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE

PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES
SEE AMPHENOL PART NUMBER FOR DETAIL.
50U" MIN. NICKEL OVERALL
GOLD FLASH ON CONTACT TAILS

RECOMMEND SOLDER PROCESS
WAVE SOLDER ,PEAK TEMPERATURE 260° FOR 5~8 SECOND
REFLOW SOLDER ,PEAK TEMPERATURE 260° FOR 10 SECOND MAX

AMPHENOL PART NUMBER: RJE09-288-0X10-H

GOLD PLATING
1 = 06 μ"
2 = 15 μ"
3 = 30 μ"
4 = 50 μ"

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN	STEVE.X	MAY19/21
PRIMARY UNITS INCHES	CHECKED	L.CHAN	MAY19/21
SECONDARY MILLIMETERS	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE ±0.015	ENG. REL. NO.		
2 DECIMAL PLACES ±0.010	REF.		
3 DECIMAL PLACES ±0.010	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1.5°	DO NOT SCALE DRAWING		

Amphenol Canada Corp. Commercial Products			
TITLE RJE09 MODULAR JACK, 2 PORTS, 8 POSITION, 8 CONTACTS WITHOUT SHIELD - RoHS COMPLIANT			
DWG NO.	P-RJE09-288-0X10-H		REV A
CODE ID NO. 03554	DWG SIZE X	SCALE XX:1	SHEET 1 OF 1