

FXLH1T45

Level Translator, 1-Bit Bidirectional

Configurable Voltage Supplies and Bushold Data Inputs

The FXLH1T45 is a single bit configurable dual-voltage supply translator designed for both uni-directional and bi-directional voltage translation between two logic levels. The device allows translation between voltages as high as 3.6 V to as low as 1.1 V. The A port tracks the V_{CCA} level, and the B port tracks the V_{CCB} level. This allows for bi-directional voltage translation over a variety of voltage levels: 1.2 V, 1.5 V, 1.8 V, 2.5 V and 3.3 V.

The device remains in 3-STATE until both V_{CC} s reach active levels allowing either V_{CC} to be powered-up first. Internal power down control circuits place the device in 3-STATE if either V_{CC} is removed.

The Transmit/Receive ($T/\bar{R}$) input determines the direction of data flow through the device. The FXLH1T45 is designed so that the control pin ($T/\bar{R}$) is supplied by V_{CCA} .


Features

- Bi-directional Interface between any 2 Levels from 1.1 V to 3.6 V
- Fully Configurable: Inputs Track V_{CC} level
- Non-preferential Power-up Sequencing; either V_{CC} may be Powered-up First
- Outputs Remain in 3-STATE until Active V_{CC} Level is Reached
- Outputs Switch to 3-STATE if either V_{CC} is at GND
- Power Off Protection
- Bushold On Data Inputs Eliminates the Need for External Pull-up/Pull-down Resistors
- Control Input ($T/\bar{R}$) Levels are Referenced to V_{CCA} Voltage
- Packaged in the MicroPak 6 SIP6 (1.0 mm x 1.45 mm)
- ESD Protections Exceeds:
 - ◆ 4 kV HBM ESD (per JESD22-A114 & Mil Std 883e 3015.7)
 - ◆ 8 kV HBM I/O to GND ESD (per JESD22-A114 & Mil Std 883e 3015.7)
 - ◆ 1 kV CDM ESD (per ESD STM 5.3)
 - ◆ 200 V MM ESD (per JESD22-A115 & ESD STM5.2)



ON Semiconductor®

www.onsemi.com



SIP6 1.45x1.0
CASE 127EB

MARKING DIAGRAM




XD	= Device Code
KK	= Lot Code
XY	= Numeric Date Code
Z	= Assembly Plant Code


ORDERING INFORMATION

See detailed ordering and shipping information on page 9 of this data sheet.

FUNCTIONAL DIAGRAM

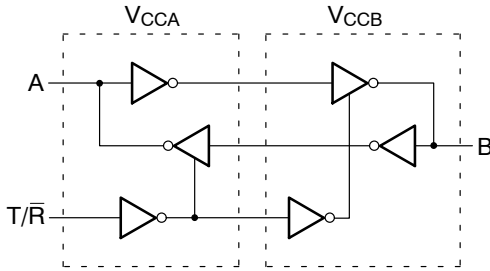

PINOUT



(Top Through View)

PIN ASSIGNMENT

Pin Number	Terminal Name
1	V _{CCA}
2	GND
3	A
4	B
5	T/ $\bar{R}$
6	V _{CCB}

PIN DESCRIPTIONS

Pin Names	Description
T/ $\bar{R}$	Transmit/Receive Input
A	Side A Input or Output
B	Side B Input or Output
V _{CCA}	Side A Power Supply
V _{CCB}	Side B Power Supply

FUNCTION TABLE

Inputs (T/ $\bar{R}$)	Outputs
L	Bus B Data to Bus A
H	Bus A Data to Bus B

H = HIGH Logic Level L = LOW Logic Level

POWER-UP/POWER-DOWN SEQUENCING

FXL translators offer an advantage in that either V_{CC} may be powered up first. This benefit derives from the chip design. When either V_{CC} is at 0V, outputs are in a HIGH-Impedance state. To ensure that bus contention, excessive currents, or oscillations do not occur, a proper power-up sequence is recommended.

The recommended power-up sequence is the following:

1. Apply power to either V_{CC}
2. Apply power to the T/ $\bar{R}$ input (Logic HIGH for A-to-B operation; Logic LOW for B-to-A operation) and to the respective data inputs (A Port or B Port). This may occur at the same time as Step 1
3. Apply power to other V_{CC}

The recommended power-down sequence is the following:

4. Remove power from either V_{CC}
5. Remove power from other V_{CC}

FXLH1T45

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Rating
V_{CCA}, V_{CCB}	Supply Voltage	-0.5 V to +4.6 V
V_I	DC Input Voltage I/O Port A I/O Port B Control Input (T/R)	-0.5 V to +4.6 V -0.5 V to +4.6 V -0.5 V to +4.6 V
V_O	Output Voltage (Note 1) Outputs 3-STATE Outputs Active (A_n) Outputs Active (B_n)	-0.5 V to +4.6 V -0.5 V to $V_{CCA} + 0.5$ V -0.5 V to $V_{CCB} + 0.5$ V
I_{IK}	DC Input Diode Current @ $V_I < 0$ V	-50 mA
I_{OK}	DC Output Diode Current @ $V_O < 0$ V $V_O > V_{CC}$	-50 mA +50 mA
I_{OH} / I_{OL}	DC Output Source/Sink Current	-50 mA / +50 mA
I_{CC}	DC V_{CC} or Ground Current per Supply Pin	± 100 mA
T_{STG}	Storage Temperature Range	-65°C to +150°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

RECOMMENDED OPERATING CONDITIONS (Note 2)

Symbol	Parameter	Rating
V_{CCA} or V_{CCB}	Power Supply Operating	1.1 V to 3.6 V
V_i	Input Voltage Port A Port B Control Input (T/R)	0.0 V to 3.6 V 0.0 V to 3.6 V 0.0 V to V_{CCA}
V_o	Output Current in I_{OH}/I_{OL} with V_{CC} @ 3.0 V to 3.6 V 2.3 V to 2.7 V 1.65 V to 1.95 V 1.4 V to 1.65 V 1.1 V to 1.4 V	± 24 mA ± 18 mA ± 6 mA ± 2 mA ± 0.5 mA
T_A	Free Air Operating Temperature	-40°C to +125°C
$\Delta t / \Delta V$	Maximum Input Edge Rate $V_{CCA/B} = 1.1$ V to 3.6 V	10 ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

NOTES:

- I_O Absolute Maximum Rating must be observed.
- All unused inputs and I/O pins must be held at V_{CC1} or GND.

FXLH1T45

DC ELECTRICAL CHARACTERISTICS ($T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}\text{C}$)

Symbol	Parameter	Conditions	V_{CCI} (V)	V_{CCO} (V)	Min.	Typ.	Max.	Units
V_{IH}	High Level Input Voltage (Note 3)	Data Inputs A_n , B_n	2.7–3.6	1.1–3.6	2.0	–	–	V
			2.3–2.7		1.6	–	–	
			1.65–2.3		$0.65 \times V_{CCI}$	–	–	
			1.4–1.65		$0.65 \times V_{CCI}$	–	–	
			1.1–1.4		$0.9 \times V_{CCI}$	–	–	
		Control Pin T/R (Referenced to V_{CCA})	2.7–3.6	1.1–3.6	2.0	–	–	
			2.3–2.7		1.6	–	–	
			1.65–2.3		$0.65 \times V_{CCA}$	–	–	
			1.4–1.65		$0.65 \times V_{CCA}$	–	–	
			1.1–1.4		$0.9 \times V_{CCA}$	–	–	
V_{IL}	Low Level Input Voltage (Note 3)	Data Inputs A_n , B_n	2.7–3.6	1.1–3.6	–	–	0.8	V
			2.3–2.7		–	–	0.7	
			1.65–2.3		–	–	$0.35 \times V_{CCI}$	
			1.4–1.65		–	–	$0.35 \times V_{CCI}$	
			1.1–1.4		–	–	$0.1 \times V_{CCI}$	
		Control Pin T/R (Referenced to V_{CCA})	2.7–3.6	1.1–3.6	–	–	0.8	
			2.3–2.7		–	–	0.7	
			1.65–2.3		–	–	$0.35 \times V_{CCA}$	
			1.4–1.65		–	–	$0.35 \times V_{CCA}$	
			1.1–1.4		–	–	$0.1 \times V_{CCA}$	
V_{OH}	High Level Output Voltage (Note 4)	$I_{OH} = -100 \mu\text{A}$	1.1–3.6	1.1–3.6	$V_{CCO}-0.2$	–	–	V
		$I_{OH} = -12 \text{ mA}$	2.7	2.7	2.2	–	–	
		$I_{OH} = -18 \text{ mA}$	3.0	3.0	2.4	–	–	
		$I_{OH} = -24 \text{ mA}$	3.0	3.0	2.2	–	–	
		$I_{OH} = -6 \text{ mA}$	2.3	2.3	2.0	–	–	
		$I_{OH} = -12 \text{ mA}$	2.3	2.3	1.8	–	–	
		$I_{OH} = -18 \text{ mA}$	2.3	2.3	1.7	–	–	
		$I_{OH} = -6 \text{ mA}$	1.65	1.65	1.25	–	–	
		$I_{OH} = -2 \text{ mA}$	1.4	1.4	1.05	–	–	
		$I_{OH} = -0.5 \text{ mA}$	1.1	1.1	$0.75 \times V_{CCO}$	–	–	
V_{OL}	Low Level Output Voltage (Note 4)	$I_{OL} = 100 \mu\text{A}$	1.1–3.6	1.1–3.6	–	–	0.2	V
		$I_{OL} = 12 \text{ mA}$	2.7	2.7	–	–	0.4	
		$I_{OL} = 18 \text{ mA}$	3.0	3.0	–	–	0.4	
		$I_{OL} = 24 \text{ mA}$	3.0	3.0	–	–	0.55	
		$I_{OL} = 12 \text{ mA}$	2.3	2.3	–	–	0.4	
		$I_{OL} = 18 \text{ mA}$	2.3	2.3	–	–	0.6	
		$I_{OL} = 6 \text{ mA}$	1.65	1.65	–	–	0.3	
		$I_{OL} = 2 \text{ mA}$	1.4	1.4	–	–	0.35	
		$I_{OL} = 0.5 \text{ mA}$	1.1	1.1	–	–	$0.3 \times V_{CCO}$	
I_I	Input Leakage Current Control Pins	$V_I = V_{CCA}$ or GND	1.1–3.6	3.6	–	–	± 1.0	μA

FXLH1T45

DC ELECTRICAL CHARACTERISTICS (continued) ($T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}\text{C}$)

Symbol	Parameter	Conditions	V _{CCI} (V)	V _{CCO} (V)	Min.	Typ.	Max.	Units
I _{I(HOLD)}	Bushold Input Minimum Drive Current	V _{IN} = 0.8 V, T _A = -40°C to +85°C	3.0	3.0	75.0	–	–	μA
		V _{IN} = 0.8 V	3.0	3.0	60.0	–	–	
		V _{IN} = 2 V, T _A = -40°C to +85°C	3.0	3.0	–75.0	–	–	
		V _{IN} = 2 V	3.0	3.0	–60	–	–	
		V _{IN} = 0.7 V	2.3	2.3	45.0	–	–	
		V _{IN} = 1.6 V	2.3	2.3	–45.0	–	–	
		V _{IN} = 0.57 V	1.65	1.65	25.0	–	–	
		V _{IN} = 1.07 V	1.65	1.65	–25.0	–	–	
		V _{IN} = 0.49 V	1.4	1.4	10.0	–	–	
		V _{IN} = 0.91 V	1.4	1.4	–10.0	–	–	
		V _{IN} = 0.11 V	1.1	1.1	–	4.0	–	
		V _{IN} = 0.99 V	1.1	1.1	–	–4.0	–	
I _{I(OD)}	Bushold Input Over-Drive Current-to-Change State	(Note 5)	3.6	3.6	450	–	–	μA
		(Note 6)	3.6	3.6	–450	–	–	
		(Note 5)	2.7	2.7	300	–	–	
		(Note 6)	2.7	2.7	–300	–	–	
		(Note 5)	1.95	1.95	200	–	–	
		(Note 6)	1.95	1.95	–200	–	–	
		(Note 5)	1.6	1.6	120	–	–	
		(Note 6)	1.6	1.6	–120	–	–	
		(Note 5)	1.4	1.4	80.0	–	–	
		(Note 6)	1.4	1.4	–80.0	–	–	
I _{OFF}	Power Off Leakage Current	A _n , V _{CCA} = V _{CCI} , V _I = 0 V to 3.6 V	0	3.6	–	–	±10.0	μA
		B _n , V _{CCB} = V _{CCI} , V _I = 0 V to 3.6 V	0	3.6	–	–	±10.0	
I _{OZ}	3-STATE Output Leakage	A _n , V _{CCA} = V _{CCO} , V _O = 0 V or 3.6 V	0	3.6	–	–	±10.0	μA
		B _n , V _{CCB} = V _{CCO} , V _O = 0 V or 3.6 V	0	3.6	–	–	±10.0	
I _{CCA/B}	Quiescent Supply Current (Note 7)	V _I = V _{CCI} or GND; I _O = 0	1.1–3.6	1.1–3.6	–	–	20.0	μA
I _{CCA}	Quiescent Supply Current	V _I = V _{CCA} or GND; I _O = 0	0	1.1–3.6	–	–	–10.0	μA
		V _I = V _{CCA} or GND; I _O = 0	1.1–3.6	0	–	–	10.0	
I _{CCB}	Quiescent Supply Current	V _I = V _{CCB} or GND; I _O = 0	1.1–3.6	0	–	–	–10.0	μA
		V _I = V _{CCB} or GND; I _O = 0	0	1.1–3.6	–	–	10.0	
ΔI _{CCA/B}	Increase in I _{CC} per Input; Other Inputs at V _{CC} or GND	V _{IH} = 3.0 V	3.6	3.6	–	–	500	μA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

NOTES:

3. V_{CCI} = the V_{CC} associated with the data input under test.
4. V_{CCO} = the V_{CC} associated with the output under test.
5. An external driver must source at least the specified current to switch LOW-to-HIGH.
6. An external driver must source at least the specified current to switch HIGH-to-LOW.
7. Reflects current per supply, V_{CCA} or V_{CCB}.

FXLH1T45

AC Electrical Characteristics ($T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, unless otherwise noted. Typical values are at $T_A = +25^{\circ}\text{C}$.)

$V_{CCA} = 3.0\text{ V}$ to 3.6 V

Symbol	Parameter	$V_{CCB} = 3.0\text{ V to }3.6\text{ V}$		$V_{CCB} = 2.3\text{ V to }2.7\text{ V}$		$V_{CCB} = 1.65\text{ V to }1.95\text{ V}$		$V_{CCB} = 1.4\text{ V to }1.6\text{ V}$		$V_{CCB} = 1.1\text{ V to }1.3\text{ V}$		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
t_{PLH}, t_{PHL}	Propagation Delay A to B	0.2	3.5	0.3	3.9	0.5	5.4	0.6	6.8	1.4	22.0	ns
	Propagation Delay B to A	0.2	3.5	0.2	3.8	0.3	4.0	0.5	4.3	0.8	13.0	
t_{PZH}, t_{PZL} (Note 8)	Output Enable $T/\bar{R}$ to B	0.4	7.2	0.5	7.6	0.7	9.1	0.8	10.5	1.6	25.7	ns
	Output Enable $T/\bar{R}$ to A	0.4	7.3	0.4	7.8	1.0	8.8	2.0	10.5	2.8	30.0	
t_{PHZ}, t_{PLZ}	Output Disable $T/\bar{R}$ to B	–	3.9	–	5.3	–	7.3	–	7.6	–	17.0	ns
	$T_A = -40^{\circ}\text{C to }+85^{\circ}\text{C}$	–	5.6	–	4.2	–	6.3	–	6.9	–	17.0	
	Output Disable $T/\bar{R}$ to A	–	4.9	–	5.8	–	3.7	–	5.7	–	3.7	
	$T_A = -40^{\circ}\text{C to }+85^{\circ}\text{C}$	–	4.6	–	4.8	–	4.5	–	4.9	–	4.5	

$V_{CCA} = 2.3\text{ V}$ to 2.7 V

Symbol	Parameter	$V_{CCB} = 3.0\text{ V to }3.6\text{ V}$		$V_{CCB} = 2.3\text{ V to }2.7\text{ V}$		$V_{CCB} = 1.65\text{ V to }1.95\text{ V}$		$V_{CCB} = 1.4\text{ V to }1.6\text{ V}$		$V_{CCB} = 1.1\text{ V to }1.3\text{ V}$		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
t_{PLH}, t_{PHL}	Propagation Delay A to B	0.2	3.8	0.4	4.2	0.5	5.6	0.8	6.9	1.4	22.0	ns
	Propagation Delay B to A	0.3	3.9	0.4	4.2	0.5	4.5	0.5	4.8	1.0	7.0	
t_{PZH}, t_{PZL} (Note 8)	Output Enable $T/\bar{R}$ to B	0.4	7.8	0.6	8.2	0.7	9.6	1.0	10.9	1.6	26.0	ns
	Output Enable $T/\bar{R}$ to A	0.5	8.0	0.6	8.5	1.2	9.3	2.0	11.5	3.0	24.0	
t_{PHZ}, t_{PLZ}	Output Disable $T/\bar{R}$ to B	–	4.1	–	4.3	–	7.0	–	6.7	–	17.0	ns
	$T_A = -40^{\circ}\text{C to }+85^{\circ}\text{C}$	–	5.7	–	4.3	–	5.7	–	6.7	–	17.0	
	Output Disable $T/\bar{R}$ to A	–	5.3	–	5.9	–	4.0	–	6.0	–	5.9	
	$T_A = -40^{\circ}\text{C to }+85^{\circ}\text{C}$	–	4.8	–	4.8	–	4.8	–	5.0	–	4.8	

$V_{CCA} = 1.65\text{ V}$ to 1.95 V

Symbol	Parameter	$V_{CCB} = 3.0\text{ V to }3.6\text{ V}$		$V_{CCB} = 2.3\text{ V to }2.7\text{ V}$		$V_{CCB} = 1.65\text{ V to }1.95\text{ V}$		$V_{CCB} = 1.4\text{ V to }1.6\text{ V}$		$V_{CCB} = 1.1\text{ V to }1.3\text{ V}$		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
t_{PLH}, t_{PHL}	Propagation Delay A to B	0.3	4.0	0.5	4.5	0.8	5.7	0.9	7.1	1.5	22.0	ns
	Propagation Delay B to A	0.5	5.4	0.5	5.6	0.8	5.7	1.0	6.0	1.2	8.0	
t_{PZH}, t_{PZL} (Note 8)	Output Enable $T/\bar{R}$ to B	0.8	9.0	1.0	9.5	1.3	10.7	1.4	12.1	2.0	27.0	ns
	Output Enable $T/\bar{R}$ to A	0.7	10.5	0.7	10.8	1.6	10.9	2.5	13.0	3.2	25.0	
t_{PHZ}, t_{PLZ}	Output Disable $T/\bar{R}$ to B	–	5.1	–	5.2	–	6.7	–	7.0	–	17.0	ns
	$T_A = -40^{\circ}\text{C to }+85^{\circ}\text{C}$	–	5.7	–	5.6	–	5.8	–	7.0	–	17.0	
	Output Disable $T/\bar{R}$ to A	–	5.0	–	6.5	–	5.0	–	5.0	–	5.0	
	$T_A = -40^{\circ}\text{C to }+85^{\circ}\text{C}$	–	5.0	–	5.0	–	5.0	–	5.0	–	5.0	

FXLH1T45

$V_{CCA} = 1.4 \text{ V to } 1.6 \text{ V}$

Symbol	Parameter	$V_{CCB} = 3.0 \text{ V to } 3.6 \text{ V}$		$V_{CCB} = 2.3 \text{ V to } 2.7 \text{ V}$		$V_{CCB} = 1.65 \text{ V to } 1.95 \text{ V}$		$V_{CCB} = 1.4 \text{ V to } 1.6 \text{ V}$		$V_{CCB} = 1.1 \text{ V to } 1.3 \text{ V}$		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
t_{PLH}, t_{PHL}	Propagation Delay A to B	0.5	4.3	0.5	4.8	1.0	6.0	1.0	7.3	1.5	22.0	ns
	Propagation Delay B to A	0.6	6.8	0.8	6.9	0.9	7.1	1.0	7.3	1.3	9.5	
t_{PZH}, t_{PZL} (Note 8)	Output Enable T/ $\bar{R}$ to B	1.5	10.3	1.5	10.8	2.0	12.0	2.0	13.3	2.5	28.0	ns
	Output Enable T/ $\bar{R}$ to A	1.0	12.9	1.2	13.1	1.8	13.3	2.5	14.8	3.3	27.5	
t_{PHZ}, t_{PLZ}	Output Disable T/ $\bar{R}$ to B	–	6.1	–	6.2	–	6.2	–	7.5	–	18.0	ns
	$T_A = -40^\circ\text{C to } +85^\circ\text{C}$	–	6.1	–	6.2	–	6.2	–	7.5	–	18.0	
	Output Disable T/ $\bar{R}$ to A	–	8.0	–	7.5	–	6.0	–	6.0	–	6.0	
	$T_A = -40^\circ\text{C to } +85^\circ\text{C}$	–	6.5	–	6.3	–	6.0	–	6.0	–	6.0	

$V_{CCA} = 1.1 \text{ V to } 1.3 \text{ V}$

Symbol	Parameter	$V_{CCB} = 3.0 \text{ V to } 3.6 \text{ V}$		$V_{CCB} = 2.3 \text{ V to } 2.7 \text{ V}$		$V_{CCB} = 1.65 \text{ V to } 1.95 \text{ V}$		$V_{CCB} = 1.4 \text{ V to } 1.6 \text{ V}$		$V_{CCB} = 1.1 \text{ V to } 1.3 \text{ V}$		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
t_{PLH}, t_{PHL}	Propagation Delay A to B	0.8	13.0	1.0	7.0	1.2	8.0	1.3	9.5	2.0	24.0	ns
	Propagation Delay B to A	1.4	22.0	1.4	22.0	1.5	22.0	1.5	22.0	2.0	24.0	
t_{PZH}, t_{PZL} (Note 8)	Output Enable T/ $\bar{R}$ to B	2.8	28.0	3.0	19.0	3.2	20.0	3.3	21.5	4.0	36.0	ns
	Output Enable T/ $\bar{R}$ to A	2.4	37.0	2.1	29.0	2.5	30.0	3.5	32.0	4.0	44.0	
t_{PHZ}, t_{PLZ}	Output Disable T/ $\bar{R}$ to B	–	15.0	–	7.0	–	8.0	–	10.0	–	20.0	ns
	$T_A = -40^\circ\text{C to } +85^\circ\text{C}$	–	15.0	–	7.0	–	8.0	–	10.0	–	20.0	
	Output Disable T/ $\bar{R}$ to A	–	15.0	–	12.0	–	12.0	–	12.0	–	12.0	
	$T_A = -40^\circ\text{C to } +85^\circ\text{C}$	–	15.0	–	12.0	–	12.0	–	12.0	–	12.0	

NOTES:

8. The enable time, t_{PZH} or t_{PZL} , is the time for the FXLH1T45 to return to active operation after a direction change. The enable time specifies the worst-case delay from the time the T/ $\bar{R}$ pin is switched until a valid output signal is expected. For example, to change direction to B-to-A operation, the T/ $\bar{R}$ pin is switched from HIGH-to-LOW. The enable time for this case is found by adding the disable time for T/ $\bar{R}$ to B to the propagation delay for B to A. The formulas for calculating enable times are the following:

$$\begin{aligned}
 t_{PZH} \text{ (T/ $\bar{R}$ to A)} &= t_{PLZ} \text{ (T/ $\bar{R}$ to B)} + t_{PLH} \text{ (B to A)} \\
 t_{PZL} \text{ (T/ $\bar{R}$ to A)} &= t_{PHZ} \text{ (T/ $\bar{R}$ to B)} + t_{PHL} \text{ (B to A)} \\
 t_{PZH} \text{ (T/ $\bar{R}$ to B)} &= t_{PLZ} \text{ (T/ $\bar{R}$ to A)} + t_{PLH} \text{ (A to B)} \\
 t_{PZL} \text{ (T/ $\bar{R}$ to B)} &= t_{PHZ} \text{ (T/ $\bar{R}$ to A)} + t_{PHL} \text{ (A to B)}
 \end{aligned}$$

CAPACITANCE

Symbol	Parameter	Conditions	$T_A = +25^\circ\text{C}$	Units
			Typical	
C_{IN}	Input Capacitance Control Pin (T/ $\bar{R}$)	$V_{CCA} = V_{CCB} = 3.3 \text{ V}, V_I = 0 \text{ V or } V_{CCA/B}$	4.0	pF
$C_{I/O}$	Input/Output Capacitance A_n, B_n Ports	$V_{CCA} = V_{CCB} = 3.3 \text{ V}, V_I = 0 \text{ V or } V_{CCA/B}$	5.0	pF
C_{PD}	Power Dissipation Capacitance	$V_{CCA} = V_{CCB} = 3.3 \text{ V}, V_I = 0 \text{ V or } V_{CC}, F = 10 \text{ MHz}$	20.0	pF

FXLH1T45

AC Loading and Waveforms

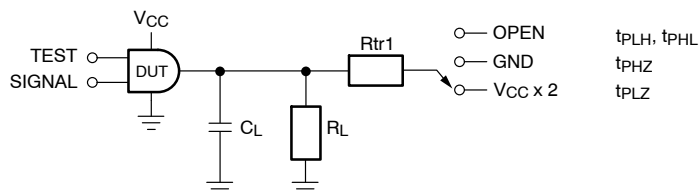


Figure 1. AC Test Circuit

AC TEST CIRCUIT

Test	Switch
t _{PLH} , t _{PHL}	OPEN
t _{PLZ}	V _{CCO} × 2 at V _{CCO} = 3.3 ±0.3 V, 2.5 V ±0.2 V, 1.8 V ±0.15 V, 1.5 V ±0.1 V, 1.2 V ±0.1 V
t _{PHZ}	GND

AC LOAD TABLE

V _{CCO}	C _L	R _L	R _{tr1}
1.2 V ±0.1 V	15 pF	2 kΩ	2 kΩ
1.5 V ±0.1 V	15 pF	2 kΩ	2 kΩ
1.8 V ±0.15 V	15 pF	2 kΩ	2 kΩ
2.5 V ±0.2 V	15 pF	2 kΩ	2 kΩ
3.3 V ±0.3 V	15 pF	2 kΩ	2 kΩ

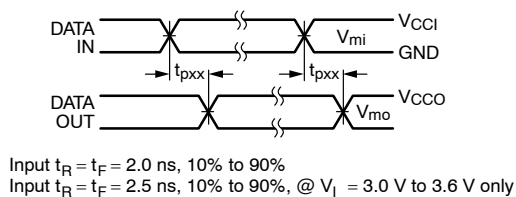


Figure 2. Waveform for Inverting and Non-Inverting Functions


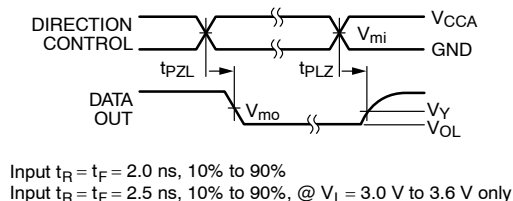


Figure 3. 3-STATE Output Low Enable and Disable Times for Low Voltage Logic

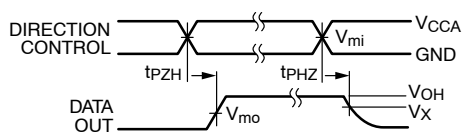

Input $t_R = t_F = 2.0$ ns, 10% to 90%
 Input $t_R = t_F = 2.5$ ns, 10% to 90%, @ $V_I = 3.0$ V to 3.6 V only

Figure 4. 3-STATE Output High Enable and Disable Times for Low Voltage Logic

Symbol	V _{CC}				
	3.3V ± 0.3V	2.5 V ± 0.2 V	1.8 V ± 0.15 V	1.5 V ± 0.1 V	1.2 V ± 0.1 V
V _{mi}	V _{CCI} / 2	V _{CCI} / 2	V _{CCI} / 2	V _{CCI} / 2	V _{CCI} / 2
V _{mo}	V _{CCO} / 2	V _{CCO} / 2	V _{CCO} / 2	V _{CCO} / 2	V _{CCO} / 2
V _X	V _{OH} - 0.3 V	V _{OH} - 0.15 V	V _{OH} - 0.15 V	V _{OH} - 0.1 V	V _{OH} - 0.1 V
V _Y	V _{OL} + 0.3 V	V _{OL} + 0.15 V	V _{OL} + 0.15 V	V _{OL} + 0.1 V	V _{OL} + 0.1 V

9. For V_{mi} : $V_{CCI} = V_{CCA}$ for Control Pin $T/\overline{R}$ or $V_{CCA} / 2$.

FXLH1T45

ORDERING INFORMATION


Order Number	Case Number	Pb-Free	Package Description	Supplied As
FXLH1T45L6X	127EB	Yes	6-Lead MicroPak/SIP6, 1.0 mm Wide	5k Units on Tape and Reel

Tape and Reel Specification


TAPE FORMAT FOR MICROPAK

Package Designator	Tape Section	Number Cavities	Cavity Status	Cover Tape Status
L6X	Leader (Start End)	125 (typ)	Empty	Sealed
	Carrier	5000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed

Tape Dimensions Millimeters

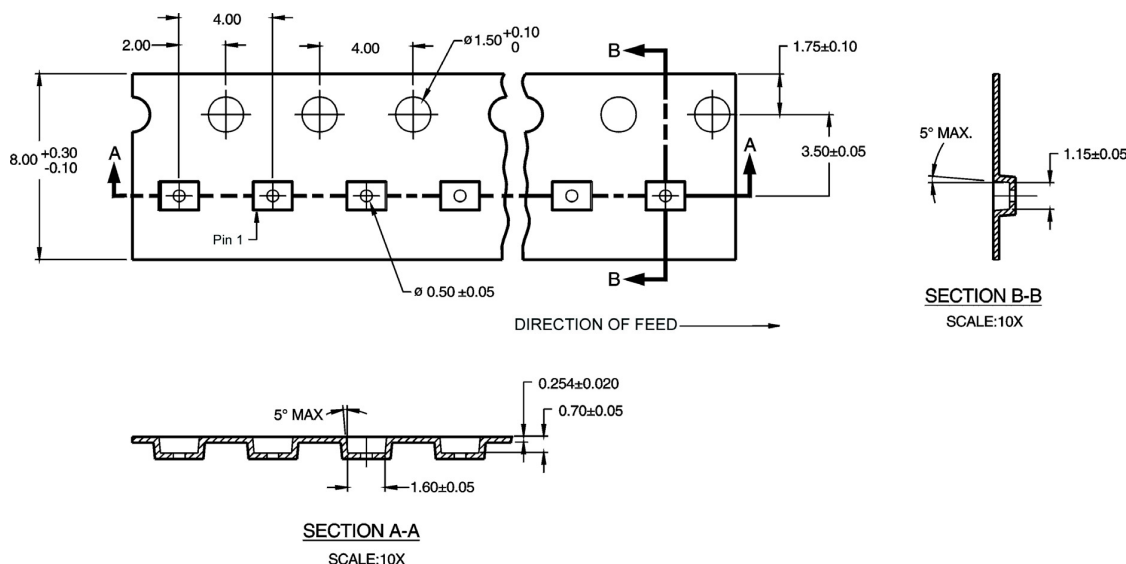


Reel Dimensions Inches (Millimeters)

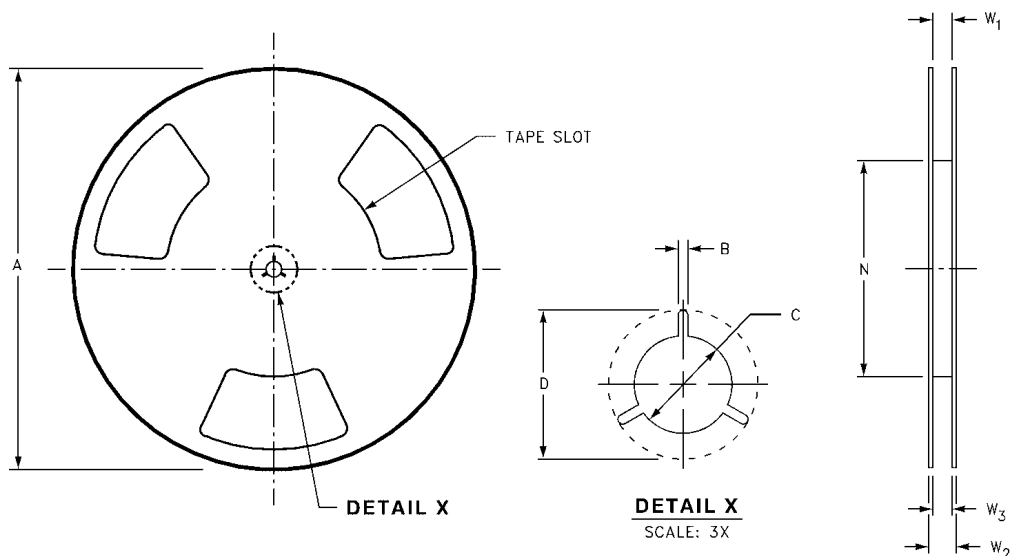

Tape Size	A	B	C	D	N	W1	W2	W3
8 mm	7.0 (177.8)	0.059 (1.50)	0.512 (13.00)	0.795 (20.20)	2.165 (55.00)	0.331 + 0.059/−0.000 (8.40 + 1.50 /−0.00)	0.567 (14.40)	W1 + 0.078 /−0.039 (W1 + 2.00 /−1.00)

SIP6 1.45X1.0
CASE 127EB
ISSUE O

DATE 31 AUG 2016

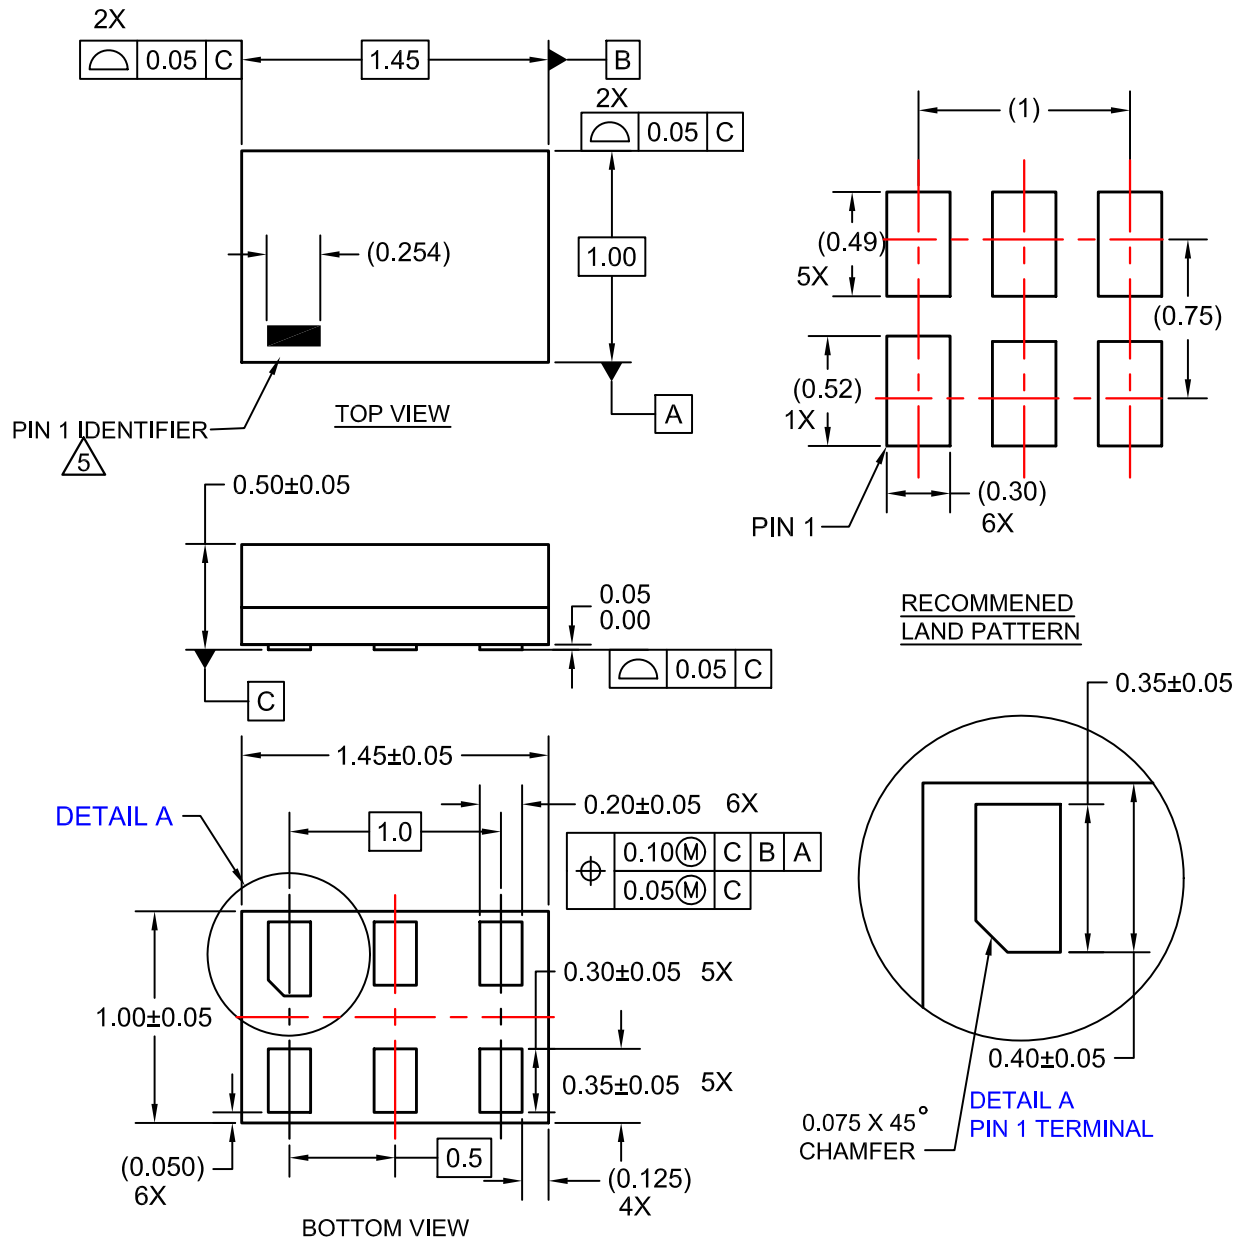

NOTES:

1. CONFORMS TO JEDEC STANDARD MO-252 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y14.5M-2009
4. PIN ONE IDENTIFIER IS 2X LENGTH OF ANY OTHER LINE IN THE MARK CODE LAYOUT.

DOCUMENT NUMBER:	98AON13590G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
STATUS:	ON SEMICONDUCTOR STANDARD	
NEW STANDARD:		
DESCRIPTION:	SIP6 1.45X1.0	
		PAGE 1 OF 2

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative