

NTC Thermistor

SAMPLE DETAILS

Customer:	N/A		
Customer Part No.:			
Sample Reference Number	N/A	REV 01	
Betatherm Part No.:	15K3MBD8		


DESCRIPTION

NTC Thermistor is soldered to 30AWG Stranded Silver Plated Copper wire with White Teflon Insulation. Device is potted in a polyimide tube using Stycast Epoxy Resin

PERFORMANCE SPECS

Parameters	Units	Value
Resistance @ +25°C	Ohms	15,000
Resistance tolerance from 25°C to 95°C	°C	±0.1
Alpha Value @ 25°C	%/°C	-4.39
Beta Value 25/85	K	3976
Tolerance on Beta Value 25/85	%	±0.5
Time response in Liquids	Milliseconds	< 400
Dissipation Constant in still air	mW/°C	0.5

MECHANICAL DETAILS

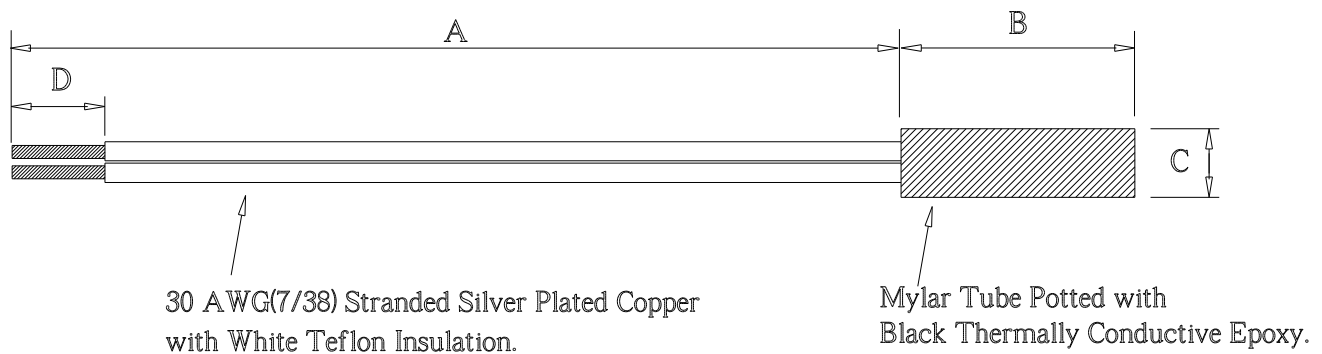

	Dimensions			
	A	B	C	D
	152 ± 5mm	5mm Max	1.7mm Max	6 ± 1mm

NTC Thermistor

RESISTANCE V TEMPERATURE TABLE

Temp. °C	Ohms
----------	------

-40	504442.5
-39	472090.7
-38	442017.1
-37	414047.9
-36	388023.7
-35	363797.6
-34	341235.1
-33	320212.3
-32	300615.1
-31	282338.6
-30	265286.2
-29	249368.8
-28	234504.5
-27	220617.4
-26	207637.8
-25	195501.1
-24	184147.9
-23	173523.1
-22	163575.9
-21	154259.1
-20	145529.4
-19	137346.4
-18	129672.7
-17	122473.9
-16	115718.0
-15	109375.1
-14	103417.8
-13	97820.4
-12	92559.3
-11	87612.3
-10	82959.0
-9	78580.4
-8	74458.7
-7	70577.4
-6	66921.2
-5	63475.8
-4	60228.0
-3	57165.3
-2	54276.1
-1	51549.8
0	48976.2
1	46546.0

Temp. °C	Ohms
----------	------

2	44250.4
3	42081.2
4	40030.8
5	38092.1
6	36258.4
7	34523.4
8	32881.3
9	31326.7
10	29854.4
11	28459.6
12	27137.9
13	25885.0
14	24697.0
15	23570.2
16	22501.1
17	21486.5
18	20523.3
19	19608.7
20	18739.9
21	17914.4
22	17129.8
23	16384.0
24	15674.7
25	15000.0
26	14358.1
27	13747.1
28	13165.5
29	12611.7
30	12084.2
31	11581.6
32	11102.6
33	10646.1
34	10210.7
35	9795.6
36	9399.5
37	9021.6
38	8660.9
39	8316.5
40	7987.7
41	7673.6
42	7373.5
43	7086.8

Temp. °C	Ohms
----------	------

44	6812.7
45	6550.7
46	6300.1
47	6060.5
48	5831.2
49	5611.8
50	5401.8
51	5200.7
52	5008.2
53	4823.8
54	4647.1
55	4477.8
56	4315.6
57	4160.1
58	4011.0
59	3868.0
60	3730.8
61	3599.2
62	3472.9
63	3351.6
64	3235.3
65	3123.5
66	3016.2
67	2913.1
68	2814.1
69	2718.9
70	2627.4
71	2539.5
72	2454.9
73	2373.6
74	2295.3
75	2220.1
76	2147.6
77	2077.9
78	2010.8
79	1946.3
80	1884.0
81	1824.1
82	1766.4
83	1710.8
84	1657.2
85	1605.6

Temp. °C	Ohms
----------	------

86	1555.8
87	1507.8
88	1461.5
89	1416.9
90	1373.8
91	1332.3
92	1292.2
93	1253.5
94	1216.1
95	1180.1
96	1145.3
97	1111.7
98	1079.2
99	1047.8
100	1017.5
101	988.2
102	959.9
103	932.5
104	906.1
105	880.5
106	855.7
107	831.8
108	808.6
109	786.2
110	764.6
111	743.6
112	723.3
113	703.6
114	684.6
115	666.2
116	648.3
117	631.0
118	614.3
119	598.1
120	582.3
121	567.1
122	552.3
123	538.0
124	524.1
125	510.6

NTC Thermistor

SAMPLE ACCEPTANCE

Meas Approval

Quality: _____ Date _____

Engineering: _____ Date _____

Customer Approval

_____ Date _____

NORTH AMERICA

Measurement Specialties, Inc.
910 Turnpike Road
Shrewsbury, MA 01545
Tel: 1-508-842-0516
Fax: 1-508-842-0342
Sales:
temperature.cs.amer@meas-spec.com

EUROPE

Measurement Specialties, Inc
Ballybrit Business Park
Galway Ireland
Tel: +353-91-753238
Fax: +353-91-770789
Sales:
temperature.cs.emea@meas-spec.com

ASIA

Measurement Specialties
(China) Ltd.
No. 26, Langshan Road,
Shenzhen High-tech Park
(North)
Nanshan District, Shenzhen,
China 518107
Sales:
temperature.cs.asia@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.