



global solutions :  
local support™

### Mobile Antenna Mobile Mounts provides temporary installation that stays put

Laird Technologies magnetic mounts provide solid footing for temporary mobile radio antenna applications on any vehicle. Designed with a 90 lb pull strength, the mount will survive heavy weather and high velocity wind and motor speeds. An optional rubber boot is available for additional protection to mounting surfaces.

#### Features and Benefits:

- Corrosion resistant materials used throughout for high durability and weather resistance
- Neoprene seal for moisture protection
- High 90 lb pull strength will allow antenna to stay put
- Optional rubber boot provides additional protection to mounting surface
- Triple reinforced coax strain relief eliminates cable pull out

### Chrome Models with 12' of RG58A/U Stranded Center Cable

|       |                              |
|-------|------------------------------|
| G8    | No Connector                 |
| G8B   | BNC Crimp                    |
| G8BI  | BNC Crimp, Installed         |
| G8MI  | Mini UHF Crimp, Installed    |
| G8N   | N Crimp                      |
| G8NS  | N Solder                     |
| G8P   | UHF (PL259) Crimp            |
| G8PI  | UHF (PL259) Crimp, Installed |
| GR8PI | UHF (PL259) Crimp, Installed |
| G8PS  | UHF (PL259) Solder           |
| G8PST | UHF (PL259) Teflon® Solder   |
| G8TI  | TNC Crimp, Installed         |

### Chrome Models with 12' of RG58U Solid Center Conductor Cable

|        |                            |
|--------|----------------------------|
| G8U    | No Connector               |
| G8UB   | BNC Crimp                  |
| G8UM   | Mini UHF Crimp             |
| G8UN   | N Crimp                    |
| G8UNS  | N Solder                   |
| G8UP   | UHF (PL259) Crimp          |
| G8UPST | UHF (PL259) Teflon® Solder |
| G8UT   | TNC Crimp                  |

### Chrome Models with 12' of RG8X Low Loss Cable

|        |                            |
|--------|----------------------------|
| G8X    | No Connector               |
| G8XBI  | BNC Crimp, Installed       |
| G8XM   | Mini UHF Crimp             |
| G8XNI  | N Crimp, Installed         |
| G8XNS  | N Solder                   |
| G8XP   | UHF (PL259) Solder         |
| G8XPST | UHF (PL259) Teflon® Solder |

### Chrome Models with 12' of Teflex™ Cable

|       |                              |
|-------|------------------------------|
| GD    | No Connector                 |
| GDBI  | BNC Crimp, Installed         |
| GDM   | Mini UHF Crimp               |
| GDN   | N Crimp, Installed           |
| GDNS  | N Solder                     |
| GDPI  | UHF (PL259) Crimp, Installed |
| GDPST | UHF (PL259) Teflon® Solder   |
| GDT   | TNC Crimp                    |


### Black Models with 12' of RG58A/U Stranded Center Cable

|        |                                                   |
|--------|---------------------------------------------------|
| GB8    | RG58A/U                                           |
| GBR8PI | Rubber Boot Option - RG58A/U with PL259 Installed |

### Other options are available

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

### Form Factor

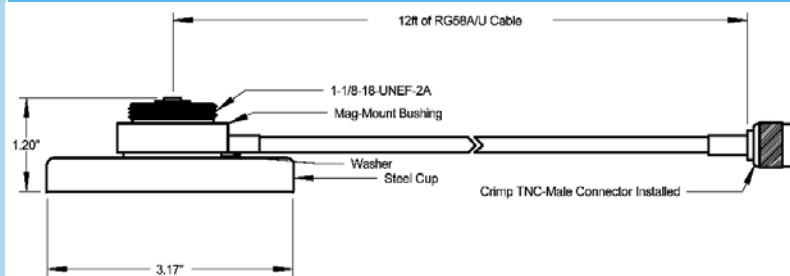

Add "B" to model number for black finish. Example: GB8