

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS nichicon

GYB

Chip Type, 105°C High Reliability






- High Reliability, Low ESR, High ripple current.
- Long life of 10000 hours at 105°C.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.




■ Specifications

| Item | Performance Characteristics | | | | | | | | | |
|---|---|---|--------------------|---|-------|---|-----------------|---|-----------------|---|
| Category Temperature Range | -55 to +105°C | | | | | | | | | |
| Rated Voltage Range | 25 to 63V | | | | | | | | | |
| Rated Capacitance Range | 10 to 330μF | | | | | | | | | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | | | | | | | | | |
| Tangent of loss angle (tan δ) | Rated voltage (V) | 25 35 50 63 | | | | | | | | |
| | tan δ (MAX.) | 0.14 0.12 0.10 0.08 | | | | | | | | |
| ESR | Less than or equal to the specified value at 100kHz, 20°C | | | | | | | | | |
| Leakage Current | After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV(μA). | | | | | | | | | |
| Temperature Characteristics (Max.Impedance Ratio) | Z-25°C / Z+20°C ≤ 2 | | | | | | | | | |
| | Z-55°C / Z+20°C ≤ 2.5 (100kHz) | | | | | | | | | |
| Endurance | The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 10000 hours at 105°C, the peak voltage shall not exceed the rated voltage. | <table border="1"> <tr><td>Capacitance change</td><td>Within ±30% of initial capacitance value</td></tr> <tr><td>tan δ</td><td>200% or less of the initial specified value</td></tr> <tr><td>ESR</td><td>200% or less of the initial specified value</td></tr> <tr><td>Leakage current</td><td>Less than or equal to the initial specified value</td></tr> </table> | Capacitance change | Within ±30% of initial capacitance value | tan δ | 200% or less of the initial specified value | ESR | 200% or less of the initial specified value | Leakage current | Less than or equal to the initial specified value |
| | Capacitance change | Within ±30% of initial capacitance value | | | | | | | | |
| tan δ | 200% or less of the initial specified value | | | | | | | | | |
| ESR | 200% or less of the initial specified value | | | | | | | | | |
| Leakage current | Less than or equal to the initial specified value | | | | | | | | | |
| Shelf Life | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. | | | | | | | | | |
| Damp Heat (Steady State) | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C, 85% RH. | <table border="1"> <tr><td>Capacitance change</td><td>Within±30% of the initial capacitance value</td></tr> <tr><td>tan δ</td><td>200% or less of the initial specified value</td></tr> <tr><td>Leakage current</td><td>Less than or equal to the initial specified value</td></tr> </table> | Capacitance change | Within±30% of the initial capacitance value | tan δ | 200% or less of the initial specified value | Leakage current | Less than or equal to the initial specified value | | |
| | Capacitance change | Within±30% of the initial capacitance value | | | | | | | | |
| tan δ | 200% or less of the initial specified value | | | | | | | | | |
| Leakage current | Less than or equal to the initial specified value | | | | | | | | | |
| Resistance to Soldering Heat | The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C. | <table border="1"> <tr><td>Capacitance change</td><td>Within±10% of the initial capacitance value</td></tr> <tr><td>tan δ</td><td>Less than or equal to the initial specified value</td></tr> <tr><td>Leakage current</td><td>Less than or equal to the initial specified value</td></tr> </table> | Capacitance change | Within±10% of the initial capacitance value | tan δ | Less than or equal to the initial specified value | Leakage current | Less than or equal to the initial specified value | | |
| | Capacitance change | Within±10% of the initial capacitance value | | | | | | | | |
| tan δ | Less than or equal to the initial specified value | | | | | | | | | |
| Leakage current | Less than or equal to the initial specified value | | | | | | | | | |
| Marking | Black print on the case top. | | | | | | | | | |

■ Dimensions

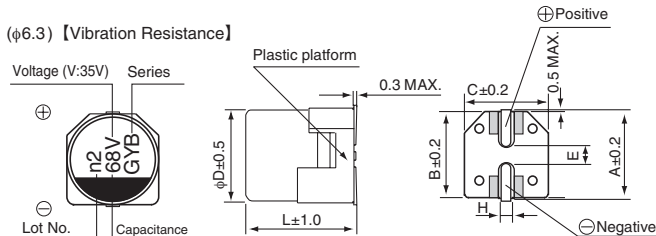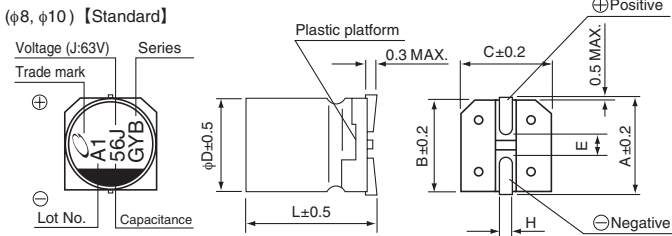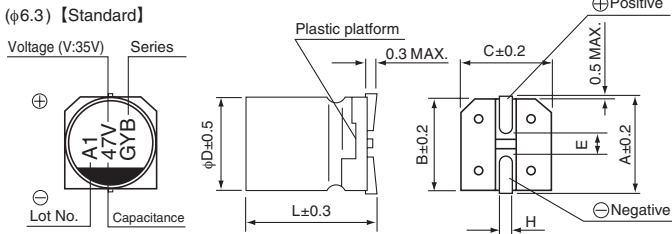


Type numbering system (Example : 35V 47μF)

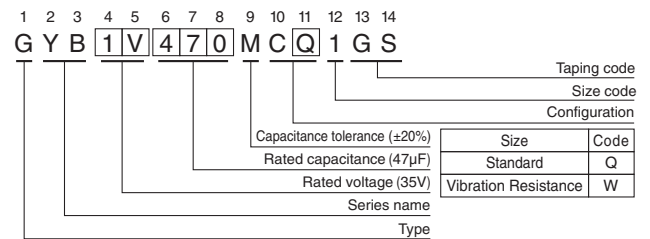

| Standard | (mm) | | | |
|----------|------------|------------|------------|------------|
| | φ6.3×5.8 | φ6.3×7.7 | φ8×10 | φ10×10 |
| A | 7.3 | 7.3 | 9.0 | 11.0 |
| B | 6.6 | 6.6 | 8.3 | 10.3 |
| C | 6.6 | 6.6 | 8.3 | 10.3 |
| E | 2.2 | 2.2 | 3.1 | 4.5 |
| L | 5.8 | 7.7 | 10.3 | 10.3 |
| H | 0.5 to 0.8 | 0.5 to 0.8 | 0.8 to 1.1 | 0.8 to 1.1 |

| Voltage | Code | | | |
|---------|------|----|----|-------|
| | V | 25 | 35 | 50 63 |
| E | V | H | J | |

| Vibration Resistance | (mm) | | |
|----------------------|------------|------------|------------|
| | φ6.3×7.7 | φ8×10 | φ10×10 |
| A | 7.3 | 9.0 | 11.0 |
| B | 6.6 | 8.3 | 10.3 |
| C | 6.6 | 8.3 | 10.3 |
| E | 2.2 | 3.1 | 4.5 |
| L | 7.7 | 10 | 10 |
| H | 0.5 to 0.8 | 1.1 to 1.5 | 1.1 to 1.5 |

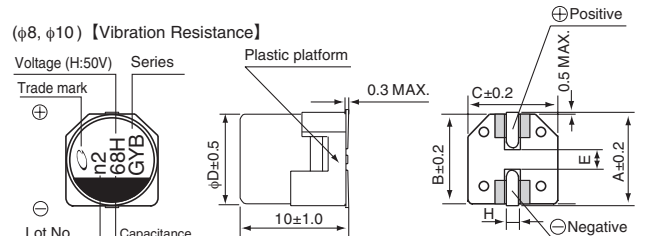

■ Aid electrode

● Frequency coefficient of rated ripple current

| Frequency | 120Hz | 1kHz | 10kHz | 100kHz or more |
|-------------|-------|------|-------|----------------|
| Coefficient | 0.15 | 0.40 | 0.75 | 1.00 |

● Dimension table in next page.

CAT.8100 I-1

GYB

■ Dimensions

| Rated Voltage (V) (code) | Rated Capacitance (μF) | Case Size φD×L (mm) | tan δ | Leakage Current (μA) (at 20°C after 2 minutes) | ESR (mΩ) MAX. (20°C/100kHz) | Rated Ripple (mA _{rms}) (105°C/100kHz) | Part Number |
|--------------------------|------------------------|---------------------|-------|--|-----------------------------|--|----------------|
| 25 (1E) | 56 | 6.3×5.8 | 0.14 | 14 | 50 | 1300 | GYB1E560MC□1GS |
| | 100 | 6.3×7.7 | 0.14 | 25 | 30 | 2000 | GYB1E101MC□1GS |
| | 220 | 8×10 | 0.14 | 55 | 27 | 2300 | GYB1E221MC□1GS |
| | 330 | 10×10 | 0.14 | 82.5 | 20 | 2500 | GYB1E331MC□1GS |
| 35 (1V) | 47 | 6.3×5.8 | 0.12 | 16.45 | 60 | 1300 | GYB1V470MC□1GS |
| | 68 | 6.3×7.7 | 0.12 | 23.8 | 35 | 2000 | GYB1V680MC□1GS |
| | 150 | 8×10 | 0.12 | 52.5 | 27 | 2300 | GYB1V151MC□1GS |
| | 270 | 10×10 | 0.12 | 94.5 | 20 | 2500 | GYB1V271MC□1GS |
| 50 (1H) | 22 | 6.3×5.8 | 0.10 | 11 | 80 | 1100 | GYB1H220MC□1GS |
| | 33 | 6.3×7.7 | 0.10 | 16.5 | 40 | 1600 | GYB1H330MC□1GS |
| | 68 | 8×10 | 0.10 | 34 | 30 | 1800 | GYB1H680MC□1GS |
| | 100 | 10×10 | 0.10 | 50 | 28 | 2000 | GYB1H101MC□1GS |
| 63 (1J) | 10 | 6.3×5.8 | 0.08 | 6.3 | 120 | 1000 | GYB1J100MC□1GS |
| | 22 | 6.3×7.7 | 0.08 | 13.86 | 80 | 1500 | GYB1J220MC□1GS |
| | 33 | 8×10 | 0.08 | 20.79 | 40 | 1600 | GYB1J330MC□1GS |
| | 56 | 10×10 | 0.08 | 35.28 | 30 | 1800 | GYB1J560MC□1GS |

□ : Enter the appropriate configuration code.

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18,19.
- Please refer to page 3 for the minimum order quantity.