

Straight Blade Devices

15 and 20 Ampere, 250 Volts

2 Pole, 3 Wire Grounding

Insulgrip® and Valise® Connector Bodies and Flanged Receptacles



NEMA 6-15R
15A 250V
UL CSA




NEMA 6-20R
20A 250V
UL Listed

Connector Bodies


Insulgrip®

Description	Cord Diameter	Catalog Numbers	
Insulgrip® Connector Body, black and white nylon, multiple drive screws.	.230"-.720" (5.8-18.3)	HBL5669C	HBL5469C
Valise® Connector Body, yellow nylon.	.220"-.660" (5.6-16.8)	HBL5669VY	HBL5469VY

Note: See page A-45 for accessories.



HBL5669C

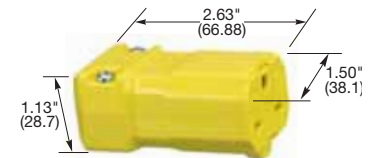

HBL5669VY


Flanged Receptacles

Description	Catalog Numbers	
Nylon casing, multiple drive screws.	HBL5679C	HBL5479C
Stainless steel flange, brown phenolic housing (mounting screws packaged separately).	HBL5656	-


Notes: Connector bodies are not HP rated.

*Watertight connectors IP55 suitability when closure plug inserted or when installed and used properly with mating Elastogrip watertight plug.

See page A-45 for accessories.



HBL5679C



HBL5656