



Wiring Device-Kellems

# Submittal

## Table of Contents

| SKU    | Asset Type          | Page |
|--------|---------------------|------|
| HBLAC2 | Specification Sheet | 2    |

Switched Enclosure Auxillary Contact


Auxillary Contact

Auxillary Contact



Ordering Information

| Description                                                             | UPC          | Catalog Number |
|-------------------------------------------------------------------------|--------------|----------------|
| Auxiliary contact, 1 NO, A600 pilot duty, break befor break (10A, 600V) | 783585955131 | HBLAC2         |
| Contact Type                                                            |              |                |
| Break before Break                                                      |              |                |

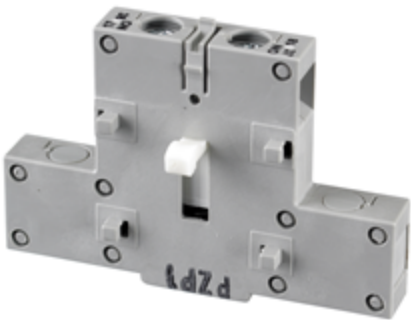

Standards

Listed to UL Standard  
Certified to CSA Standard

Performance

| Electrical           |                                                                  |
|----------------------|------------------------------------------------------------------|
| Current Interrupting | Certified for current interrupting at full rated current voltage |
| Dielectric Voltage   | Withstands 3,000V Min                                            |
| Max. Working Voltage | 600V RMS                                                         |
| Operations           | Mechanical 10,000 cycles; Electrical 6,000 cycles                |

Online Resources

eCatalog  
Installation Instructions

