

Single Pole Devices and Temporary Power

400A, 600V AC/250V DC

Female Receptacles

HUBBELL

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|---|--------------|--------------|----------------|
| 400A, thermoplastic elastomer, cable size #4 - 4/0 AWG, mates with 300A&400A Plugs. | Black | 783585112596 | HBLFRBK |




Standards

UL and cUL Listed
UL Enclosure Types 3R, 4X, 12
National Electric Code (NEC), ANSI/NFPA 70

Specifications

| | |
|--------------------------|---------------------------------|
| Base Compound | Thermoplastic Elastomer |
| Contact Material | Brass |
| Retaining Screw Material | Nylon |
| Mounting Hole | 4x #10-32 |
| Termination | (2) 7/32 Socket Head Set Screws |

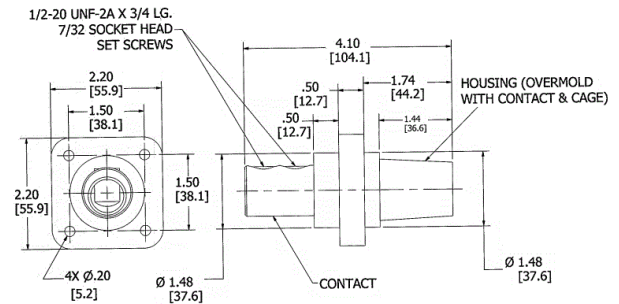

Performance

| Electrical | |
|-----------------|----------------------------------|
| Amperage Rating | 400A Maximum |
| Voltage Ratings | 600V AC Maximum; 250V DC Maximum |

| Mechanical | |
|------------------------|--|
| Product Identification | Ratings are a permanent part of device |
| Terminal Accommodation | #4 to 4/0 AWG |

| Environmental | |
|---------------|-------------------------------|
| Flammability | HB per UL94 or CSA 22.2. 0.17 |

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

