

## Housing - HC-STA-B10-HHFS-1TTM25-EL-AL - 1412604

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Sleeve housing B10, for single locking latch, Material: Die-cast aluminum, salt water resistant, Cable outlets: 1, straight, Height: 72 mm, Cable gland: none, Gland: no, 1x M25, Standard

### Why buy this product

- good shielding in the event of electromagnetic interference



### Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 059310
GTIN	4055626059310
Weight per Piece (excluding packing)	180.000 g
Custom tariff number	85389099
Country of origin	China

### Technical data

#### Dimensions

Height	72 mm
Width	44 mm
Length	73 mm

#### Ambient conditions

Degree of protection of housing (IP)	IP66
	IP67
Degree of protection of housing (NEMA)	4X (UL 50)

# Housing - HC-STA-B10-HHFS-1TTM25-EL-AL - 1412604

## Technical data

### Ambient conditions


Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

### General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Size	B10
Housing type	Sleeve housing
Color	silver
Locking type	for single locking latch
No. of cable outlets	1
Cable exit	straight
Screw connection	none
Type of the screw connection	1x M25
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated

## Drawings

Dimensional drawing

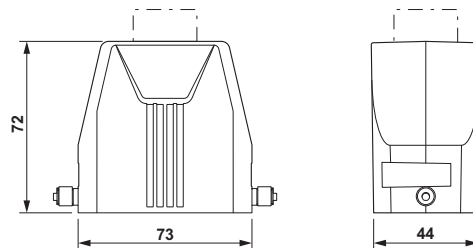

Dimensional drawing

## Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143423
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

## ETIM

ETIM 5.0	EC000437
ETIM 6.0	EC000437

# Housing - HC-STA-B10-HHFS-1TTM25-EL-AL - 1412604

## Classifications

### UNSPSC

UNSPSC 13.2	31261501
-------------	----------

## Approvals

### Approvals

#### Approvals

EAC / GL / UL Recognized / cUL Recognized / cULus Recognized

#### Ex Approvals

## Approval details

EAC			7500651.22.01.00246
-----	--	--	---------------------

GL		<a href="http://www.gl-group.com/newbuilding/approvals/index.html">http://www.gl-group.com/newbuilding/approvals/index.html</a>	6196614
----	--	---	---------

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E255026
---------------	--	---	---------

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E255026
----------------	--	---	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	
------------------	--	---	--

## Accessories

### Accessories

Full screw connection

## Housing - HC-STA-B10-HHFS-1TTM25-EL-AL - 1412604

### Accessories

Cable gland - G-INS-M25-M68N-NNES-S - 1411165



Cable gland, Cable gland material: Nickel-plated brass, External cable diameter 11 mm ... 17 mm, Shielding: No, Connecting thread: M25, Color: silver

---

Cable gland - G-INSEC-M25-S68N-NCRS-S - 1411190



Cable gland, Cable gland material: Nickel-plated brass, External cable diameter 11 mm ... 16 mm, Shielding: yes, Connecting thread: M25, Color: silver

---

Cable gland - HC-M-KV-M25(1ASI) - 1584020



Metal screw connection for an AS-Interface flat-ribbon conductor, thread type M25

---

### Labeled device marker

Plastic label - US-EMLP (20X9) CUS - 0830085



Plastic label, can be ordered: By card, white, labeled according to customer specifications, Mounting type: Adhesive, Lettering field: 20 x 9 mm

---

### Multiple screw connection

Cable gland - HC-M-KV-M25(1X10/1X11) - 1580228



Special cable screw connection M25, brass nickel-plated, grommet with 10 mm and 11 mm holes

## Housing - HC-STA-B10-HHFS-1TTM25-EL-AL - 1412604

### Accessories

---

#### Protective cover

Protective covers - HC-B10-HCLWS-PLR-BK - 1414635



HEAVYCON protective cover, B10, for HC-EVO-B10... sleeve housing, with single locking latch, with retaining cord, IP54

---

---