

Housing - HC-STA-B16-SLFDC-2SSM25-ELC-AL - 1412849

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Box mounting bases B16, for double locking latch, Material: Die-cast aluminum, salt water resistant, Protective cover material: PA, Cable outlets: 2, lateral, Height: 68 mm, Cable gland: none, Gland: no, 2x M25, Protective cover: Yes, Standard

Why buy this product

- good shielding in the event of electromagnetic interference



Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 060712
GTIN	4055626060712
Weight per Piece (excluding packing)	320.000 g
Custom tariff number	85389099
Country of origin	Poland

Technical data

Dimensions

Height	68 mm
Width	57 mm
Length	117.5 mm

Ambient conditions

Degree of protection of housing (IP)	IP66
	IP67
Degree of protection of housing (NEMA)	4 (UL 50e)

Housing - HC-STA-B16-SLFDC-2SSM25-ELC-AL - 1412849

Technical data

Ambient conditions


	4X (UL 50e)
	12 (UL 50e)
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, HV6, M, K
Size	B16
Housing type	Box mounting bases
Locking type	for double locking latch
No. of cable outlets	2
Cable exit	lateral
Screw connection	none
Type of the screw connection	2x M25
Protective cover	Yes
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated
Material, protective cover	PA
Assembly instructions	One opening is sealed with a plastic filler plug and can be opened using a screwdriver.

Drawings

Dimensional drawing

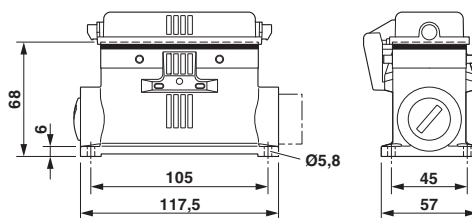

Dimensional drawing

Approvals

Approvals

Approvals

EAC / GL

Housing - HC-STA-B16-SLFDC-2SSM25-ELC-AL - 1412849

Approvals

Ex Approvals

Approval details

EAC		7500651.22.01.00246
-----	---	---------------------

GL		http://exchange.dnv.com/tari/	6196614 HH
----	---	---	------------
