REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1390196	2013/09/02	Lu Di	Update Dimension
C	LEN1460152	2014/06/24	Vicky	Update Dimension
D	LEN1490287	2014/09/16	Vicky	Add Dimension

ALTW
CONFIDENTIAL
2014-09-16
R&D DEPT.

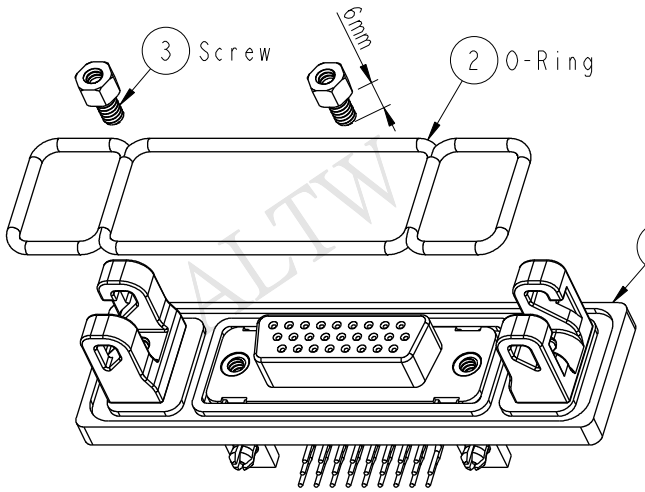



PANEL THICKNESS

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm

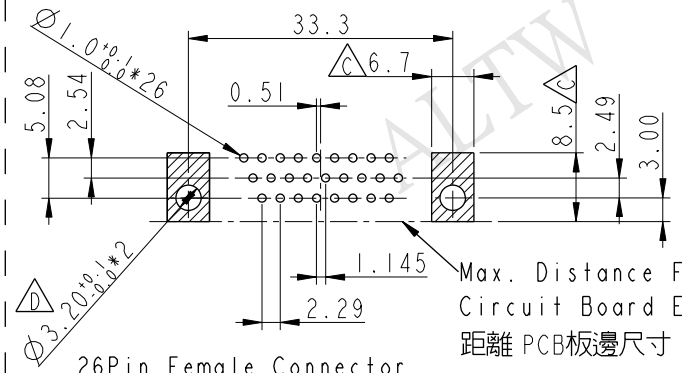

26Pin Female Connector
PCB Pin Layout

Max. Distance From The Circuit Board Edge
距離 PCB板邊尺寸
剖面線區域限高0mm C

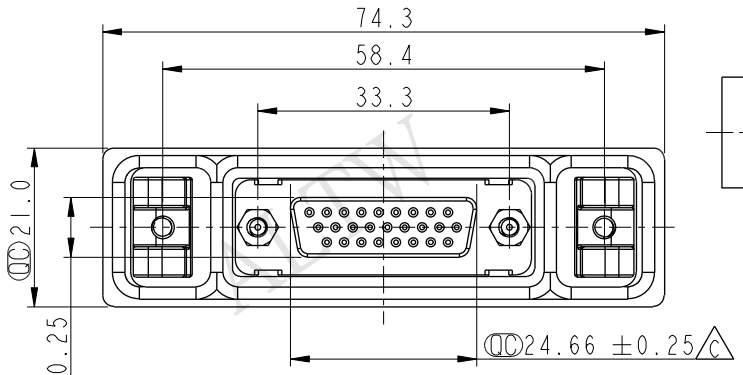

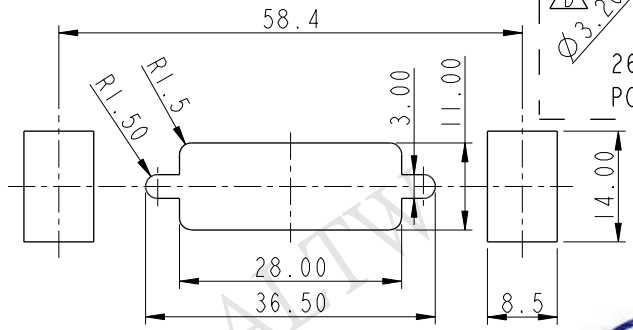

RECOMMENDED PANEL CUT-OUT

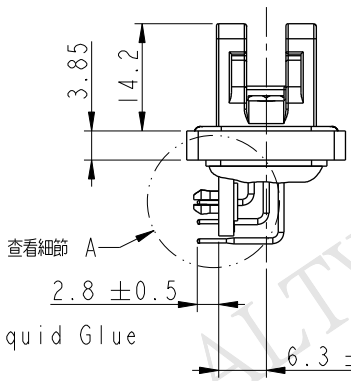

With Liquid Glue
點防水膠

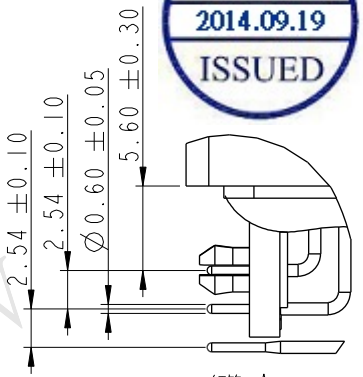

細節 A
比例 2:1

ALTW
DCC. DEPT.
CONFIDENTIAL
2014.09.19
ISSUED

Note:
* QC Important Dimension.
* Waterproof Rate: IP68
  IP68: 1M of depth of water 24 hours
* Materials:
  Pane : Zinc
  Panel Link: Zinc
  Screw: Stainless, #4-40 UNC
  O-Ring: Silicone, Black
  Insulator: PBT
  Shell: Cold Rolled Steel
  Contact: Copper Alloy
  Board Lock: Copper Alloy
* Finish:
  Panel: Nickel Plated
  Panel Link: Nickel Plated
  Board Lock: Nickel Plated
  Shell: Nickel Plated
  Contact: Gold Flash

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: D-SUB CONN
PANEL QUICK HD26P F CONN F PIN

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1
REV. D | WC-REV. A.4 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
HDB-26PFFP-QB8001	Vicky	2014-09-16
DWG NO: HDB-26PFFP-QB8001	CHECKED BY: Sam	DATE: 2014-09-16
CUSTOMER: ALTW	APPROVED BY: Rita	DATE: 2014-09-16

FMW10702-01-02A1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.