

Wirewound Resistors, Industrial Power, Edgewound



FEATURES

- High temperature silicon coating
- Complete welded construction
- Excellent for intermittent power and pulsing applications
- Designed to meet heavy-duty requirement where space is at a premium
- Excellent stability in operation (< 3 % change in resistance)



RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS				
GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{25\text{ }^\circ\text{C}}$ W	RESISTANCE RANGE Ω $\pm 10\%$ Standard, $\pm 5\%$ Available	WEIGHT (Typical) g
HLZ033	HLZ-33	35	0.05 - 1.9	18
HLZ090	HLZ-90	90	0.10 - 5.7	36
HLZ099	HLZ-99	100	0.15 - 6.1	41
HLZ105	HLZ-105	105	0.20 - 7.4	49
HLZ110	HLZ-110	110	0.20 - 8.6	54
HLZ140	HLZ-140	140	0.08 - 9.0	109
HLZ165	HLZ-165	165	0.35 - 13.0	91
HLZ220	HLZ-220	220	0.10 - 16.0	163
HLZ240	HLZ-240	240	0.10 - 18.0	186
HLZ275	HLZ-275	275	0.15 - 23.0	224
HLZ300	HLZ-300	300	0.15 - 25.0	236
HLZ375	HLZ-375	375	0.20 - 32.0	286

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	HLZ RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/ $^\circ\text{C}$	± 90 for 0.1 Ω to 0.99 Ω ; ± 50 for 1 Ω to 9.9 Ω ; ± 30 for 10 Ω and above
Dielectric Withstanding Voltage	V_{AC}	1000, from terminal to mounting hardware
Short Time Overload	-	10 \times rated power for 5 seconds
Maximum Working Voltage	V	$(P \times R)^{1/2}$
Insulation Resistance	Ω	1000 M Ω minimum dry, 100 M Ω minimum after moisture test
Operating Temperature Range	$^\circ\text{C}$	- 55/+ 350

MATERIAL SPECIFICATIONS

Element: Copper-nickel alloy of nickel-chrome alloy, depending on resistance range


Core: Ceramic, steatite

Coating: Special high temperature silicone

Standard Terminals: Model "Z" terminals are tinned steel

Terminal Bands: Steel

Part Marking: DALE, Model, Wattage, Value, Tolerance, Date Code

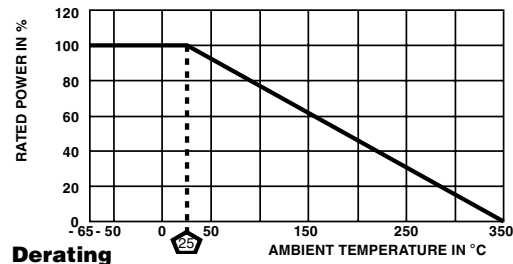


GLOBAL PART NUMBER INFORMATION																	
New Global Part Numbering: HLZ16506Z10R00KJ (preferred part number format)																	
H	L	Z	1	6	5	0	6	Z	1	0	R	0	0	K	J		
GLOBAL MODEL	TERMINAL DESIGNATION	TERMINAL FINISH	RESISTANCE VALUE	TOLERANCE	PACKAGING CODE	SPECIAL											
HLZ165 (See "Standard Electrical Specifications" table above for additional P/N's)	06 07 15	E = Lead (Pb)-free Z = Tin/Lead N = Nickel	R = Decimal K = Thousand 10R00 = 10.0 Ω 1K000 = 1 k Ω	J = $\pm 5.0\%$ K = $\pm 10.0\%$	E = Lead (Pb)-free skin pack J* = Skin pack (J01)	(Dash Number) (up to 2 digits) From 1 - 99 as applicable											
Historical Part Number example: HLZ-165-06Z 10 Ω 10 % J01 (will continue to be accepted)																	
HLZ-165	06Z	10 Ω	10 %	J01													
HISTORICAL MODEL	TERMINAL/FINISH	RESISTANCE VALUE	TOLERANCE	PACKAGING													

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches [millimeters]

MODEL	CORE DIMENSIONS			TERMINAL SETBACK ± 0.31 [± 0.79]	DISTANCE BETWEEN TERMINALS (REF)	TERMINAL DESIGNATION		MOUNTING HARDWARE OPTIONS
	LENGTH ± 0.062 [± 1.59]	O.D.	I.D. ± 0.031 [± 0.79]			STANDARD	OPTIONAL	
HLZ033	2.000 [50.8]	0.563 [14.29]	0.313 [7.94]	0.094 [2.38]	1.437	06Z	15N	101, 203, 301
HLZ090	4.000 [101.6]	0.563 [14.29]	0.313 [7.94]	0.094 [2.38]	3.312	06Z	15N	101, 203, 301
HLZ099	3.500 [88.9]	0.750 [19.05]	0.500 [12.70]	0.125 [3.18]	2.750	06Z	15N	102, 206, 303
HLZ105	4.000 [101.6]	0.750 [19.05]	0.500 [12.70]	0.125 [3.18]	3.250	06Z	15N	102, 206, 303
HLZ110	4.500 [114.3]	0.750 [19.05]	0.500 [12.70]	0.125 [3.18]	3.750	06Z	15N	102, 206, 303
HLZ140	4.000 [101.6]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	2.812	07Z	15N	103, 205, 303
HLZ165	6.500 [165.1]	0.750 [19.05]	0.500 [12.70]	0.125 [3.18]	5.750	06Z	15N	102, 206, 303
HLZ220	6.000 [152.4]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	4.812	07Z	15N	103, 205, 303
HLZ240	6.500 [165.1]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	5.312	07Z	15N	103, 205, 303
HLZ275	8.000 [203.2]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	6.812	07Z	15N	103, 205, 303
HLZ300	8.500 [215.9]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	7.312	07Z	15N	103, 205, 303
HLZ375	10.500 [266.7]	1.125 [28.58]	0.750 [19.05]	0.219 [5.56]	9.312	07Z	15N	103, 205, 303

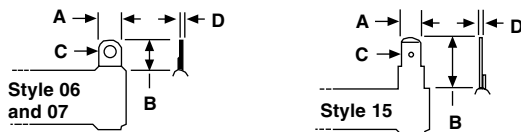TERMINAL DIMENSIONS


DIMENSION	TERMINAL TYPE		
	06	07	15
A	0.250 [6.35]	0.375 [9.53]	0.250 [6.35]
B	0.563 [14.29]	0.625 [15.88]	0.594 [15.08]
C	0.166 [4.22]	0.173 [4.39]	0.065 [1.65]
D	0.020 [0.51]	0.020 [0.51]	0.031 [0.79]

TERMINAL FINISH

“E” Finish - 100 % Sn coated steel. “Z” Finish - 60/40 Sn/Pb coated steel. “N” Finish - Nickel coated steel. Finish for terminal style 14 and 15 are limited to nickel plated steel (N).

MOUNTING HARDWARE DIMENSIONS in inches [millimeters]

HORIZONTAL THRU-BOLT				PUSH-IN				VERTICAL THRU-BOLT			
DIMENSION	BRACKET TYPE			DIMENSION	BRACKET TYPE			DIMENSION	BRACKET TYPE		
	101	102	103		203	205	206		301	303	
X	1.063 [26.99]	1.063 [26.99]	1.063 [26.99]	X	0.625 [15.88]	0.813 [20.64]	0.719 [18.26]	X (Approximate)	0.438 [11.11]	0.500 [12.70]	
Y	0.500 [12.70]	0.750 [19.05]	1.250 [31.75]	H	0.672 [17.07]	1.391 [35.32]	0.969 [24.61]	THREAD	8-32	10-32	
Z	0.859 [21.83]	0.859 [21.83]	1.000 [25.40]	Y	0.250 [6.35]	0.500 [12.70]	0.375 [9.53]				
H	1.000 [25.40]	1.250 [31.75]	1.500 [38.10]	Z	0.469 [11.91]	0.688 [17.46]	0.625 [15.88]				
MOUNTING SLOT	0.219 x 0.438 [5.56 x 11.11]	0.219 x 0.438 [5.56 x 11.11]	0.281 x 0.563 [7.14 x 14.29]	HOLE (Dia)	0.161 [4.09]	0.196 x 0.260 [4.98 x 6.60]	0.196 x 0.260 [4.98 x 6.60]				
C	0.750 [19.05]	0.750 [19.05]	0.875 [22.23]								
B	1.375 [34.93]	1.750 [44.45]	2.125 [53.98]								



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.