

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE 0.75 N MAX /CONT
EXTRACTION FORCE 0.15 N MIN /CONT
INSULATION RESISTANCE 10⁴ MΩ MIN


NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
- THIS PRODUCT IS CSA APPROVED THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

This data is classified as secret. Reproduction or communication is prohibited without the prior written permission of the manufacturer.



LAY OUT
P.C.B.-HOLE

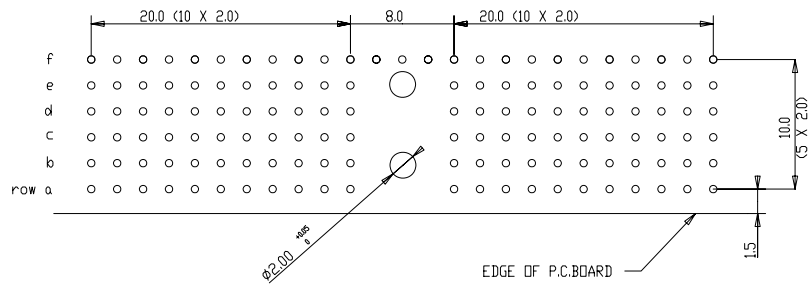

Material		Spec ref		tolerance	projection	size	Scale
Mat code		Heat-treat		MM			
Plating/Finish		✓		MM			
rev	ecn no	dr	date	Dr	4 2 92	J V B	Product Family
A	000000	KN	14-9-01	Eng			MILLIPACS
B	005-0093	MNI	08/06/05	Chr			Model Name
C	006-0056	Guo.M	03/08/05	Appr			HMGROIPASIOF----
D	006-0297	Kason	07/19/06				Model Revision
E	007-0362	Kason	05/09/07				REL Level
							REL Level
FCI		MPACS 5+2R RA RCP		2	BS,C,201418,028		Rev.
CONN TYPE A		11		CUSTOMER DRAWING		sheet 1 of 1	
Pro/E file		catalog no		HMGROIPASIOF----		CUSTOMER DRAWING	