


Search Results

- Evaluate
 - FAQ's
 - Selection Guides
 - PDFHeat Shrink..
- Design a Solution
 - Catalog Cut Sheet
 - PDFHSTT4A1548- ..
 - Part Drawings
 - PDFHSTT4A Heat..
 - Specification Sheets
 - PDF4:1 Heat Shr..
- How to Buy
 - Bill of Material
 - Favorite Products List
 - Locate Distributor


Home > Products Overview > Search Results >

Current refinements (click  to remove) Search Tips


 Text Search: 'HSTT4A31-48-Q'

Your search criteria matched only one product, shown below

HSTT4A31-48-Q

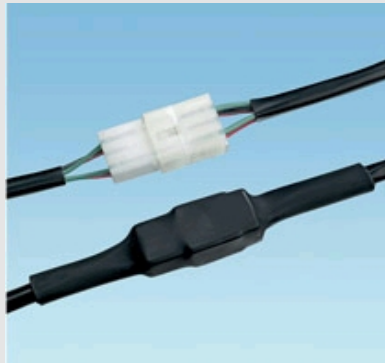

- Applications include insulating and protecting oversized electrical and electronic components, cables, terminals and connectors
- Flexible tubing with an adhesive inner wall which seals and protects components from moisture and corrosion
- Voltage: 600 V
- Shrink ratio: 4:1
- Flammability: Flame retardant outer wall meets UL 224 VW -1
- Mil Spec: AMSDTL-23053/4 Class 3 (material performance only)
- Temperature range: -67°F to 257°F (-55°C to 125°C)
- For damp locations
- Material: Adhesive lined black cross -linked Polyolefin

Part Number	HSTT4A31-48-Q
RoHS Compliancy Status	Compliant
Part Description	Heat Shrink 4:1, .315" (8.0mm) Min Expanded I.D., Black
Material	Adhesive lined irradiated cross-linked polyolefin
Color	Black
Military Specification	AMS-DTL-23053/4 Class 3 (material performance only)
UL Recognized	Yes
Length (ft.)	4
Length (m)	1.2
CE Compliant	No
Flammability Rating	Flame retardant outer wall meets UL 224 VW1
Max. Recovered I.D. (In.)	0.079
Max. Recovered I.D. (mm)	2.0
Min. Expanded I.D. (In.)	0.315
Min. Expanded I.D. (mm)	8.0
Nominal Diameter (In.)	0.315
Nominal Diameter (mm)	8.0
Nominal Recovered Wall Thickness (In.)	0.043
Nominal Recovered Wall Thickness (mm)	1.10
Pricing Description	Heat Shrink 4:1, .315" (8.0mm) Min Expanded I.D., Black
Shrink Ratio	4:1
Temperature Range	-67°F – 257°F (-55°C – 125°C)
Min. Order UOM	PC
Min. Order Qty.	25
BOM Qty. (# of Pkgs.)	<input type="text" value="0"/>
Add to Favorite Product List	

Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.