

Filter Inductors High Current



STANDARD ELECTRICAL SPECIFICATIONS

MODEL	IND. at 1 kHz (μ H)	TOL.	DCR MAX. (Ohms)	RATED CURRENT (Max. Amps)
IHA-101	50	$\pm 10\%$	0.120	2.5
IHA-102	100	$\pm 10\%$	0.160	2.1
IHA-103	250	$\pm 10\%$	0.280	1.8
IHA-104	500	$\pm 10\%$	0.420	1.6
IHA-105	1000	$\pm 10\%$	0.600	1.4
IHA-201	27	$\pm 10\%$	0.060	3.7
IHA-202	50	$\pm 10\%$	0.085	3.1
IHA-203	100	$\pm 10\%$	0.120	2.7
IHA-204	250	$\pm 10\%$	0.200	2.4
IHA-205	500	$\pm 10\%$	0.320	2.3
IHA-301	5	$\pm 10\%$	0.015	6.8
IHA-302	10	$\pm 10\%$	0.021	6.1
IHA-303	27	$\pm 10\%$	0.040	4.8
IHA-304	50	$\pm 10\%$	0.050	4.3
IHA-305	100	$\pm 10\%$	0.070	4.2
IHA-501	5	$\pm 10\%$	0.010	9.3
IHA-502	10	$\pm 10\%$	0.015	8.3
IHA-503	27	$\pm 10\%$	0.030	6.5
IHA-504	50	$\pm 10\%$	0.040	6.1
IHA-505	100	$\pm 10\%$	0.060	5.9

ELECTRICAL SPECIFICATIONS

Inductance: Measured at 1.0 V with zero DC current

Current Rating: Maximum continuous operating current (DC or RMS) based on 50 °C temperature rise

Dielectric Rating: 2500 VRMS, 60 Hz, applied for one minute between winding and outer circumference to within 0.250" [6.35 mm] of the insulation sleeve edge

Operating Temperature: - 55 °C to + 125 °C (no load)
- 55 °C to + 75 °C (at full rated current)

MECHANICAL SPECIFICATIONS

Winding: Layered solenoid type

Wire: Solid soft copper

Terminals: Tinned copper leads

Encapsulant: Polyolefin tubing

Core Material: Ferrite

APPLICATIONS

Noise filtering for switching regulators, power amplifiers, power supplies and SCR and Triac control circuits


FEATURES

- Printed circuit mounting (axial leads)
- Pre-tinned leads
- Low cost construction
- Protected by polyolefin tubing - flame retardant UL type VW-1 per MIL-I-23053/5, Class 3 requirements



RoHS
COMPLIANT

DIMENSIONS in inches [millimeters]

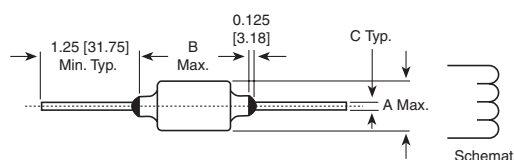

MODEL	A (Max.)	B (Max.)	C ± 0.002 [0.050]
IHA-101	0.475 [12.07]	0.800 [20.32]	0.032 [0.813]
IHA-102	0.475 [12.07]	0.800 [20.32]	0.032 [0.813]
IHA-103	0.475 [12.07]	1.050 [26.67]	0.032 [0.813]
IHA-104	0.550 [13.97]	1.050 [26.67]	0.032 [0.813]
IHA-105	0.550 [13.97]	1.175 [29.85]	0.032 [0.813]
IHA-201	0.500 [12.70]	0.800 [20.32]	0.032 [0.813]
IHA-202	0.500 [12.70]	0.800 [20.32]	0.032 [0.813]
IHA-203	0.500 [12.70]	0.920 [23.37]	0.032 [0.813]
IHA-204	0.600 [15.24]	0.920 [23.37]	0.032 [0.813]
IHA-205	0.750 [19.05]	1.050 [26.67]	0.032 [0.813]
IHA-301	0.475 [12.07]	0.800 [20.32]	0.032 [0.813]
IHA-302	0.475 [12.07]	0.920 [23.37]	0.032 [0.813]
IHA-303	0.550 [13.97]	0.800 [20.32]	0.032 [0.813]
IHA-304	0.550 [13.97]	0.920 [23.37]	0.032 [0.813]
IHA-305	0.550 [13.97]	1.175 [29.85]	0.032 [0.813]
IHA-501	0.475 [12.07]	1.050 [26.67]	0.040 [1.02]
IHA-502	0.475 [12.07]	1.050 [26.67]	0.040 [1.02]
IHA-503	0.700 [17.78]	1.050 [26.67]	0.040 [1.02]
IHA-504	0.700 [17.78]	1.050 [26.67]	0.040 [1.02]
IHA-505	0.700 [17.78]	1.300 [33.02]	0.040 [1.02]

MARKING

- Vishay Dale
- Model
- Date code

DESCRIPTION

MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD
IHA-101	50 μ H	10 %	EB	e2

GLOBAL PART NUMBER

I	H	A	1	0	1	E	B
MODEL						PACKAGE CODE	



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.