

High-Quality Sound

If you want the best quality sound, you can't pick low quality materials. This is why for our Performance series, we sourced the highest quality materials available to us in order to provide you with a high quality product.

Our Performance Series was made for those looking for durability in a budget friendly package.

Flexible PVC Jacket

The Performance series comes complete with a matte PVC jacket that protects the interior workings of the cable from the harsh environment. It also helps the cable keep its shape for a perfect coil every time.

Rugged Connectors

Our sleek, black connectors feature an extremely durable zinc die cast shell, which can withstand the rigors of any musical environment. They also come complete with a rubber boot just the right amount of strain relief.

Great EMI Resistance

Inside, this 2 conductor cable features a spiral shield which provides up to 95% coverage. The result is less Electromagnetic Interference to maintain the purest quality signal possible.



Part Number	IO-XLR3-3-E	IO-XLR3-6-E	IO-XLR3-10-E	IO-XLR3-25-E	IO-XLR3-50-E	IO-XLR3-100-E
Length*	3 Ft .9m	6 Ft 1.8m	10 Ft 3m	25 Ft 7.6m	50 Ft 15m	100 Ft 30.5m
AWG	24AWG	24AWG	24AWG	24AWG	24AWG	24AWG
Jacket Color	Black	Black	Black	Black	Black	Black

*Custom Lengths available upon request

Product specifications may change without prior notification

Configuration



Product

Part number IO-XLR3-XX-E*
 Number of Conductors 2 plus shield

Conductors

Details 20/0.12
 Size 24 AWG

Insulation

Material PE
 Colors Red and White

Shield

Spiraled 60/0.12

Jacket

O.D. 6.0mm
 Material PVC
 Color Black

Electrical and Mechanical Characteristics

Conductor DC Resistance (ohm/m)	0.075 +/- 5%
Shield DC Resistance (ohm/m)	0.025
Voltage Breakdown	300V
Flex Life	> 17,700
Tensile Strength	> 656.2N
Applicable Temperature	-20°C ~ +60°C (-4°F ~ +140°F)
Peak Temperature	-40°C ~ +70°C (-40°F ~ +158°F)

*Part number breakdown:

IO-XLR3-XX-E


Type of cable, i.e. "XLR," "DMX," etc. plus number of pins on connector, i.e. "3" for 3 pin connector, "5" for 5 pin connector

IO-XLR3-XX-E

Length of the cable in feet, i.e. "6" means 6 ft. and "75" means 75 ft.

IO-XLR3-XX-E

Series identifier. Options are "E" for Performance, "P" for Professional, "X" for Premium

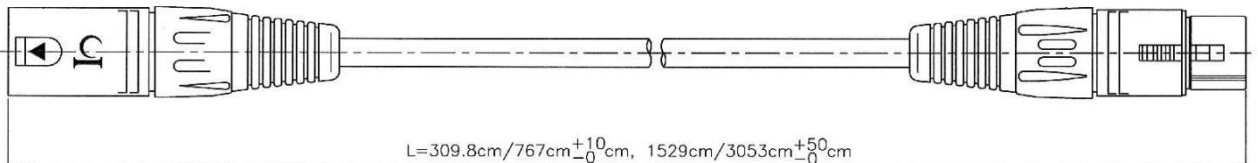

Product specifications may change without prior notification