


features

- Suitable for automatic machine insertion
- No rating
- Products with lead-free terminations meet RoHS requirements

dimensions and construction

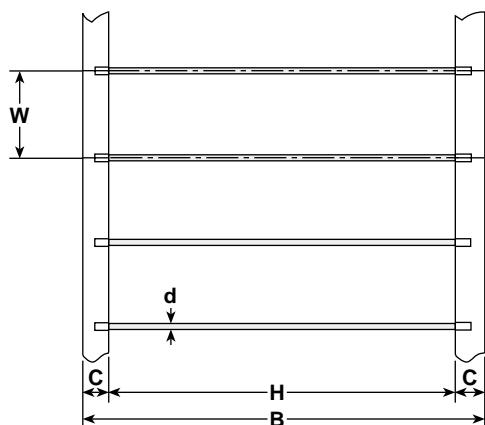

Type	Dimensions inches (mm)				
	H	B	C	W	d
JL5					.02±.002 (0.5±0.05)
JL6	2.05±.039 (52.0±1.0)	2.52±.039 (64.0±1.0)	.236±.002 (6.0±0.05)	.197±.002 (5.0±0.05)	.024±.002 (0.6±0.05)
JL8					.031±.002 (0.8±0.05)

applications and ratings

Part Designation	Maximum Resistance	Maximum Current Ratings
JL5	10mΩ	8 Amps
JL6		10 Amps
JL8		15 Amps

ordering information

New Part #	JL	8	C	T52	A
	Type	Nominal Diameter	Termination Material	Taping and Forming	Packaging
		5 (24 gauge) 6 (22 gauge) 8 (20 gauge)	C: SnCu (Other termination styles available, contact factory for options)	T26, T52	A: Ammo

For further information on packaging, please refer to Appendix C.