


Aug.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

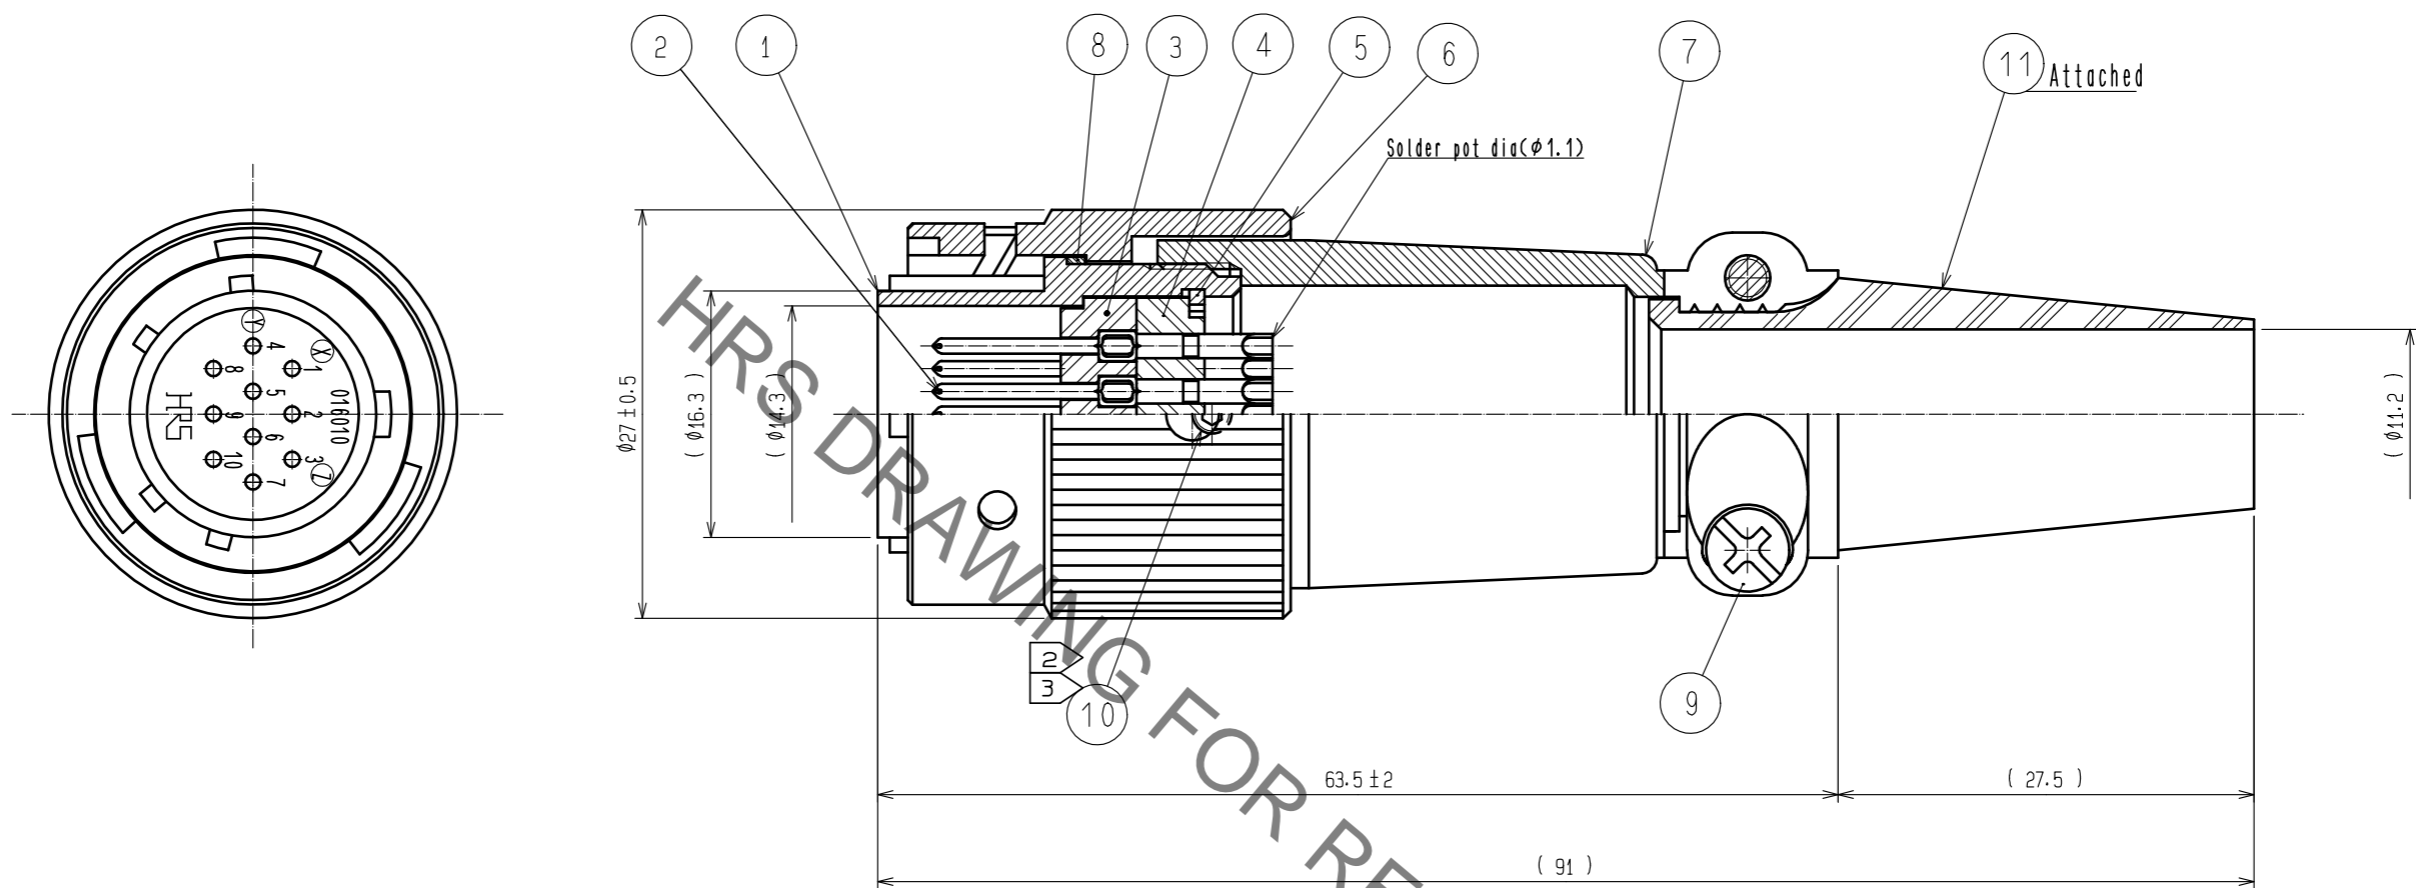

NOTES 1 Rotation examples of ref. No. ① and No. ⑦ are shown.
 ② The recommended clamp torque of ref. No. ⑩ : 0.2 to 0.3N · m.
 ③ Across flats of hexagon hole of ref. No. ⑩ : 1.27

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	PHOSPHOR BRONZE	NICKEL PLATING	10	CHLOROPRENE RUBBER	(BLACK)
4	PHENOL FORMALDEHYDE	(BLACK) UL94V-0	9	STEEL	NICKEL PLATING JIS B 1177 HEXAGON SOCKET SET SCREW M2.0×0.45×2
3	PHENOL FORMALDEHYDE	(BLACK) UL94V-0	8	BRASS	NICKEL PLATING JIS B 1111 PAN HEAD MACHINE SCREW M3×0.5×8
2	COPPER ALLOY	SILVER PLATING 3μ min.	7	POLYACETAL	
1	ALUMINUM ALLOY	NICKEL PLATING	6	ALUMINUM ALLOY	MATTE FINISH NICKEL PLATED
			5	ALUMINUM ALLOY	MATTE FINISH NICKEL PLATED

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
HRS HIROSE ELECTRIC CO., LTD.			APPROVED : HY. KOBAYASHI 15.09.14 CHECKED : HY. KOBAYASHI 15.09.14 DESIGNED : KN. IKEHARA 15.09.14 DRAWN : KN. IKEHARA 15.09.14	DRAWING NO. EDC-119151-00-00 PART NO. JRC16BP-10PA CODE NO. CL114-0300-0-00		