



KISSLING | KISSLING Series 35


TE Internal #: K1143584

TE Internal Description: Battery Disconnecter 35-411-150-R

Battery Disconnecter, 400A, 1 Pole

[View on TE.com >](#)

Switches > Battery Disconnect Switches > Battery Disconnecter, 400A, 1 Pole

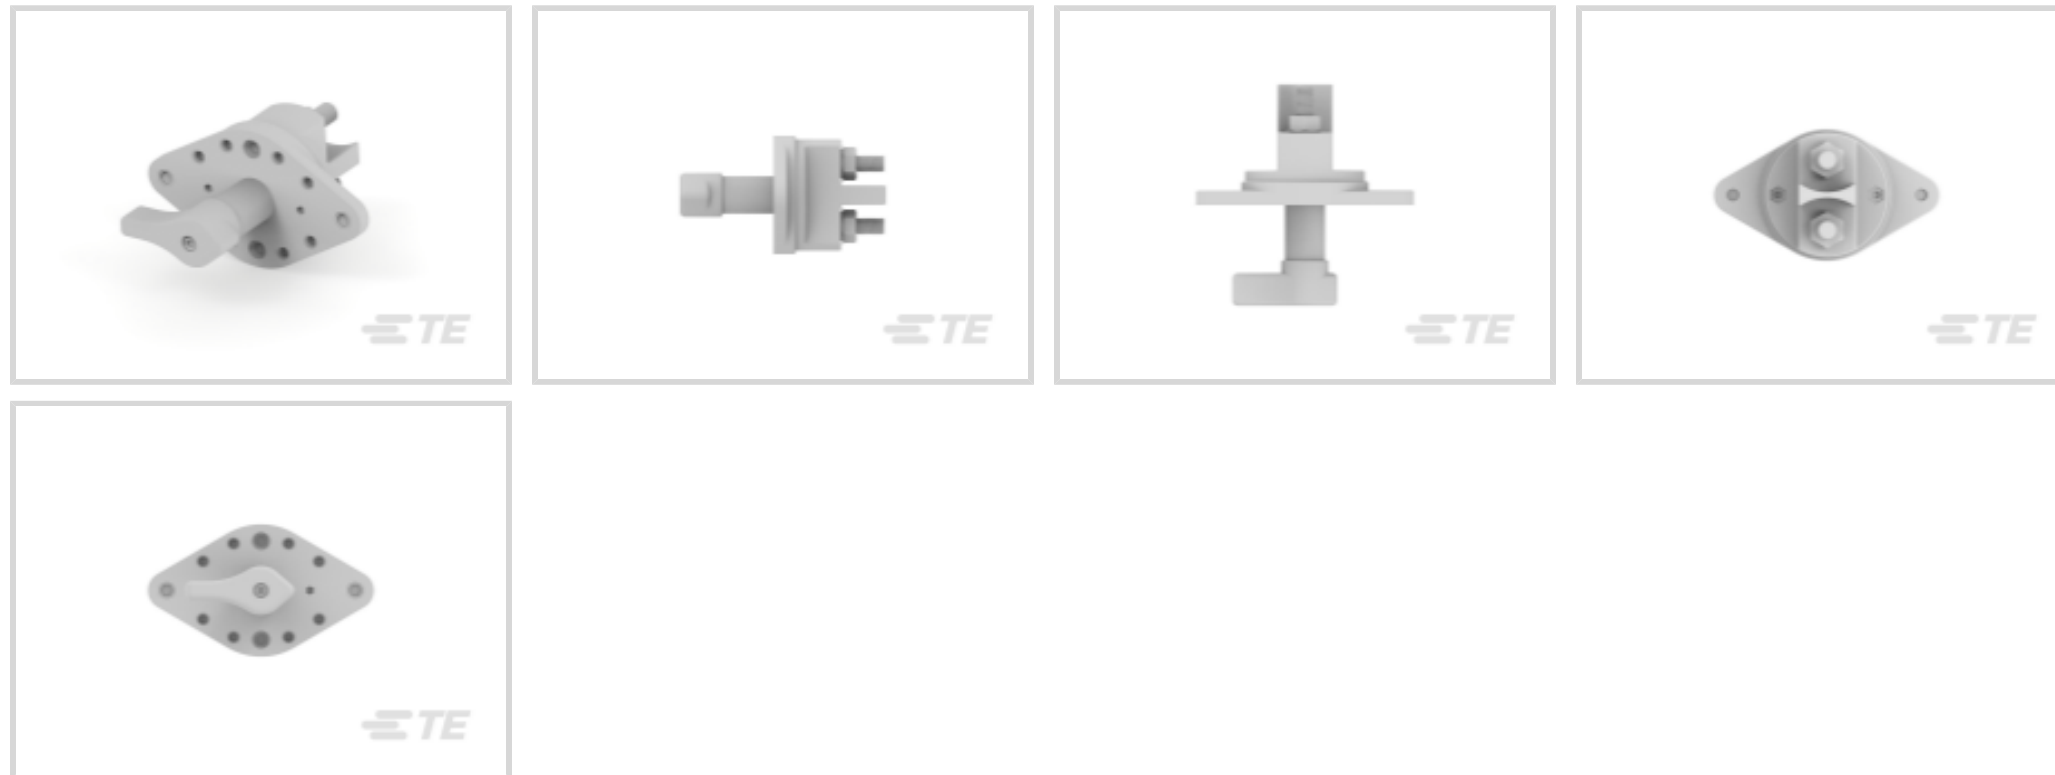

Operating Voltage: **32 VDC**
 Switch Main Contact Current Rating: **400 A**
 Number of Poles: **1**
 Termination Thread Size: **M10**
 Number of Auxiliary Contacts: **0**

[All Battery Disconnecter, 400A, 1 Pole \(22\)](#)

Features

Product Type Features

| | |
|---------------|-----|
| Sealed Device | Yes |
|---------------|-----|

Configuration Features

| | |
|------------------------------|-------------------------|
| Number of Poles | 1 |
| Number of Auxiliary Contacts | 0 |
| Switch Keying Option | Removable Without Chain |

Electrical Characteristics

| | |
|------------------------------------|--------|
| Operating Voltage | 32 VDC |
| Switch Main Contact Current Rating | 400 A |

Body Features

| | |
|------------------------|-----|
| Operating Handle Color | Red |
|------------------------|-----|

Mechanical Attachment

| | |
|-------------------------|-------------|
| Termination Thread Size | M10 |
| Switch Mounting Option | Long Flange |

| | |
|-----------------------|-------------|
| Operating Handle Type | Pointer Key |
|-----------------------|-------------|

Dimensions

| | |
|---------------------------------------|------------------|
| Centerline Between Flange Screw Holes | 100 mm[3.937 in] |
| Screw Hole Diameter | 6.5 mm[.256 in] |

Usage Conditions

| | |
|-----------------------------|---------------------------|
| Operating Temperature Range | -40 – 85 °C[-40 – 185 °F] |
|-----------------------------|---------------------------|

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Not Yet Reviewed |
| EU ELV Directive 2000/53/EC | Not Yet Reviewed |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Not reviewed for China RoHS compliance |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2024 (240) Not Yet Reviewed |
| Halogen Content | Not Yet Reviewed for halogen content |
| Solder Process Capability | Not reviewed for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # CAT-AL4-SBD352001
Battery Disconnecter, 200A, 1 Pole



TE Part # CAT-AL4-SBD352002
Battery Disconnecter, 200A, 2 Pole



TE Part # CAT-AL4-SBD353001
Battery Disconnecter, 300A, 1 Pole



TE Part # K1127651
Battery Disconnecter 35-323-151-R



TE Part # CAT-AL4-SBD354001
Battery Disconnecter, 400A, 1 Pole




TE Part # CAT-AL4-SBD355001
Battery Disconnecter, 500A, 1 Pole



TE Part # CAT-AL4-SBD355002
Battery Disconnecter, 500A, 2 Pole




TE Part # CAT-AL8-KSDRSS
Rotary Switch, Socket, Short Handle Selector, Sealed

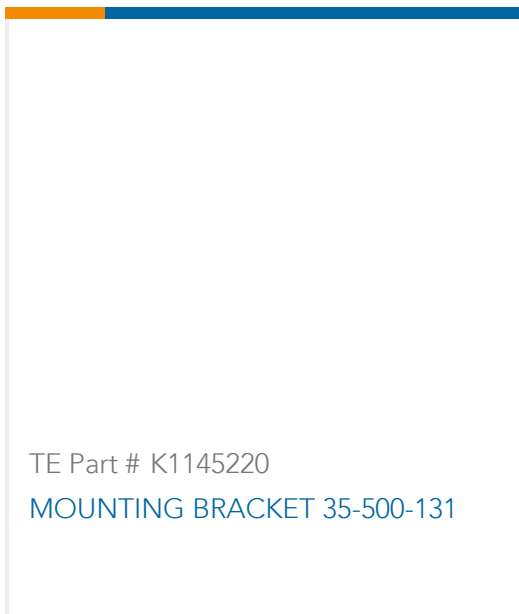


TE Part # K1145220
MOUNTING BRACKET 35-500-131

Also in the Series | **KISSLING Series 35**




Battery Disconnect Switches(165)



Rotary Switches(6)

Customers Also Bought

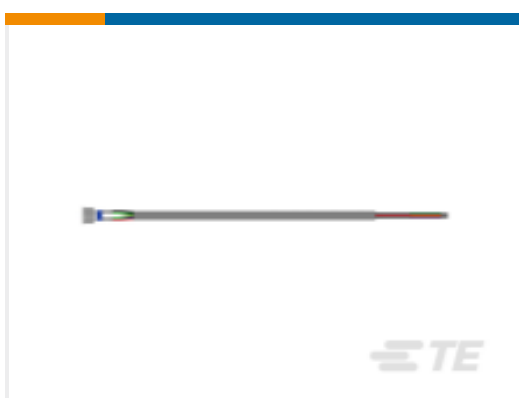

TE Part #2317659-9
AV25 DPM 3A MOVING RING POWER R&G 12V FL



TE Part #EH2294-000
DWFR-40/13-0-STK



TE Part #K1137217
Battery Disconnecter 35-524-231-R-900



TE Part #2-1879129-5
RN 0402 1K47 0.1% 10PPM CUT LENGTH



Documents

Product Drawings

Battery Disconnecter 35-411-150-R

German

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_35-411-150-R_1.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_35-411-150-R_1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_35-411-150-R_1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

KISSLING BATTERY DISCONNECTOR Series 35 / 400A

English