

NYLON RETAINING SPACERS

Similar to our standard spacers, but with a specially configured I.D. designed to grip the outside of the screw shank. The spacer slides on the screw easily, but is retained on the screw. For use in applications requiring pre-assembly of the screw and spacer, to reduce final assembly cost.



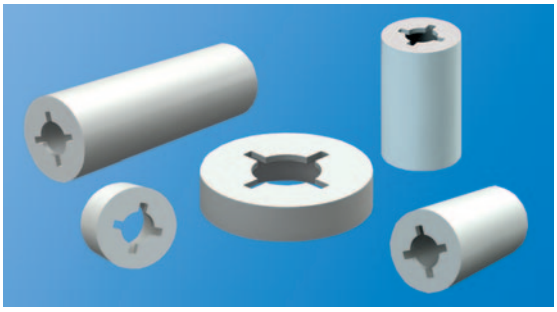

MATERIAL: Nylon 6/6, UL Rated 94V-2


CAT. NO.	.156 (3.9) Clear Hole for #4 Screw LENGTH	O.D.	I.D.
2341	.125 (3.2)		
2342	.250 (6.4)		
2343	.375 (9.5)		
2344	.500 (12.7)	.250	.102
2345	.625 (15.9)	(6.4)	(2.6)
2346	.750 (19.1)		
2347	.875 (22.2)		
2348	1.00 (25.4)		

CAT. NO.	.198 (5.0) Clear Hole for #6 Screw LENGTH	O.D.	I.D.
2361	.125 (3.2)		
2362	.250 (6.4)		
2363	.375 (9.5)		
2364	.500 (12.7)	.312	.128
2365	.625 (15.9)	(7.9)	(3.3)
2366	.750 (19.1)		
2367	.875 (22.2)		
2368	1.00 (25.4)		

CAT. NO.	.240 (6.1) Clear Hole for #8 Screw LENGTH	O.D.	I.D.
2381	.125 (3.2)		
2382	.250 (6.4)		
2383	.375 (9.5)		
2384	.500 (12.7)	.375	.152
2385	.625 (15.9)	(9.5)	(3.8)
2386	.750 (19.1)		
2387	.875 (22.2)		
2388	1.00 (25.4)		


CAT. NO.	.277 (7.0) Clear Hole for #10 Screw LENGTH	O.D.	I.D.
2391	.125 (3.2)		
2392	.250 (6.4)		
2393	.375 (9.5)		
2394	.500 (12.7)	.500	.177
2395	.625 (15.9)	(12.7)	(4.5)
2396	.750 (19.1)		
2397	.875 (22.2)		
2398	1.00 (25.4)		

HINGED STANDOFFS



- Applications unlimited
- Time saving
- Space saving
- Interconnect circuits or services without danger of shorting


MATERIAL:
Brass, ASTM-B16. Zinc Plate and Yellow Chromate

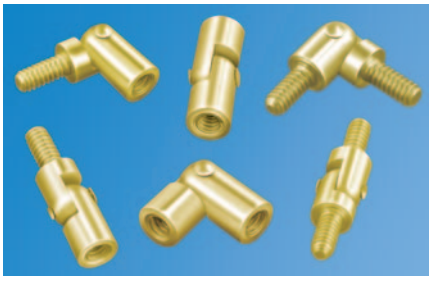

FEMALE/FEMALE




CAT. NO.	L LENGTH	U	P	D DIAMETER	T THREAD
351	.750 (19.1)	.172 (4.4)	.375 (9.5)	.187 (4.7)	4-40
352	1.000 (25.4)	.250 (6.4)	.625 (15.9)		
330	1.250 (31.8)	.250 (6.4)	.625 (15.9)		
353	.750 (19.1)	.172 (4.4)	.375 (9.5)	.250 (6.4)	6-32
354	1.000 (25.4)	.250 (6.4)	.625 (15.9)		
331	1.250 (31.8)	.250 (6.4)	.625 (15.9)		
355	.750 (19.1)	.172 (4.4)	.375 (9.5)	.250 (6.4)	8-32
356	1.000 (25.4)	.250 (6.4)	.625 (15.9)		
332	1.250 (31.8)	.250 (6.4)	.625 (15.9)		



MALE/FEMALE




CAT. NO.	L LENGTH	S	U	D DIAMETER	T THREAD
333	.625 (15.9)	.250 (6.4)	.172 (4.4)	.187 (4.7)	4-40
334	.875 (22.2)	.250 (6.4)	.250 (6.4)		
335	.625 (15.9)	.312 (7.9)	.172 (4.4)	.250 (6.4)	6-32
336	.875 (22.2)	.312 (7.9)	.250 (6.4)		
337	.625 (15.9)	.312 (7.9)	.172 (4.4)	.250 (6.4)	8-32
338	.875 (22.2)	.312 (7.9)	.250 (6.4)		



MALE/MALE



CAT. NO.	L LENGTH	S	P	D DIAMETER	T THREAD
357	.500 (12.7)	.250 (6.4)	.250 (6.4)	.187 (4.7)	4-40
358	.500 (12.7)	.312 (7.9)	.250 (6.4)	.250 (6.4)	6-32
359	.500 (12.7)	.312 (7.9)	.250 (6.4)	.250 (6.4)	8-32



Tel (516) 328-7500 • Fax (516) 328-1080
(800) 221-5510 • kec@keyelco.com
KEYSTONE
RoHS COMPLIANT ~ ISO 9001 CERTIFIED
www.keyelco.com
55 S. Denton Avenue, New Hyde Park, NY 11040