

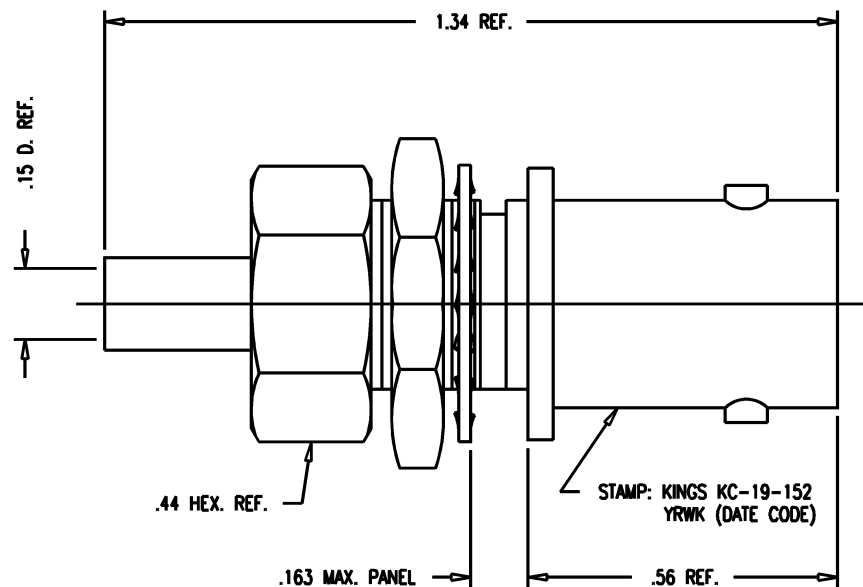


DASH NO.	M CODE	MADE FROM
----------	--------	-----------



NOTES:

- FOR USE WITH RG-174, 179, 187, 188 & 316/U CABLE.
- FOR CABLING INSTRUCTIONS SEE CP-430.
- FOR CRIMPING USE DIE KTH-2024.
- INTERFACE PER MIL-STD-348, FIG. 301-2.
- MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
LOCKWASHER: PHOS. BRONZE, QQ-B-750
CENTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16-H02
- FINISHES:
CENTER CONTACT: GOLD PLATE PER ASTM-B-488
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz

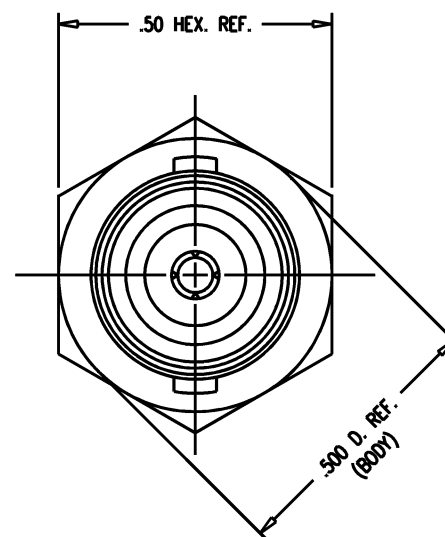

MOUNTING HOLE

GSD

GSD

KC-19-152

REVISIONS	
ISSUE	CHANGES
4	CN 33608 C REDRAWN JCA 12/18/91
5	CN 34589 E JCA 04/19/93
6	CN 35657 B KH 07/20/94
7	CN 39182 D JPK 10/12/04
8	CN 39807 C HVN 02/22/07
KC-19-152 SD	
SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
JACK, BULKHEAD, BNC	
DRAWN JCA	DATE 12/18/91
DESIGN MJB	DATE 12/19/91
APPR.	DATE
 ROCK HILL, SOUTH CAROLINA 29730	
KC-19-152	