

Search Results

- Evaluate
 - FAQ's
- Design a Solution
 - Part Drawings
 - PDF Copper, Long..
- How to Buy
 - Bill of Material
 - Favorite Products List
 - Locate Distributor


Home > Products Overview > Search Results >

Current refinements (click  to remove) Search Tips

 Text Search: 'LCCXN650-12-6'

Your search criteria matched only one product, shown below

LCCXN650-12-6

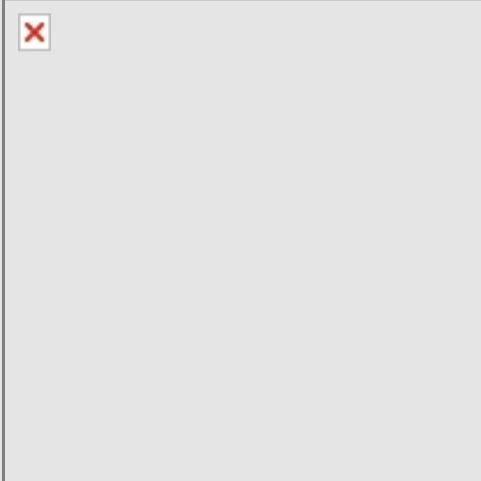

For use with Flexible and Extra-Flexible Stranded Copper Copper Conductors

- Narrow tongue width for limited space applications
- Can be used with flex conductor class: G, H, I, K, M and Diesel Locomotive
- Long barrel maximizes number of crimps and provides premium wire pull -out strength and electrical performance
- Generously beveled wire entry prevents bent back strands when inserting conductor into barrel
- Color-coded barrels marked with Panduit and specified competitor die index numbers for proper crimp die selection
- Inspection window to visually assure full conductor insertion
- Tin-plated to inhibit corrosion
- UL Listed and CSA Certified to 35 KV** and temperature rated to 90°C when crimped with Panduit and specified competitor crimping tools and dies
- Meets J-STD-607-A and TIA-942 requirements for network systems grounding applications
- Available with NEMA hole sizes and spacing

▪ Part Number	LCCXN65012-6
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Flex lug, long barrel, narrow tongue, 650 kcmil, 2hole, 1/2" stud holes, 1.75 hole spacing.
▪ CSA Certified	Yes
▪ UL Listed	Yes
▪ Length (In.)	6.78
▪ Length (mm)	172.2
▪ Diesel Locomotive	646.4 kcmil
▪ Stud Hole Size (In.)	1/2
▪ Stud Hole Spacing (In.)	1.75
▪ Tongue Width (In.)	1.35
▪ Barrel Length (In.)	2.94
▪ Angle	Straight
▪ Barrel Length (mm)	74.7
▪ CE Compliant	No
▪ Panduit Color Code	Black
▪ PANDUIT Die Color & Die No.	Black P106
▪ Panduit Die Index No.	P106
▪ Pricing Description	Copper Compression Lug, 2 Hole, 650 kcmil, Narrow Tongue 1/2" (12.7mm) Stud
▪ Stud Hole Size (mm)	12.7
▪ Tongue Thickness	0.36
▪ Tongue Type	Standard
▪ Tongue Width (mm)	34.3
▪ Tool	CT-930, CT-2931, CT-2931/E
▪ Wire Strip Length (In.)	3
▪ Wire Strip Length (mm)	76.2
▪ Min. Order UOM	PC
▪ Min. Order Qty.	1
▪ Burndy Die Index No.	24
▪ T&B Die Index No.	106
▪ BOM Qty. (# of Pkgs.)	<input type="text" value="0"/>
▪ Add to Favorite Product List	

Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.