



LTR	REVISION	DATE	APPD
A	091312-MM01: UPDATED COLOR TEMP. RANGE	01-07-13	MM

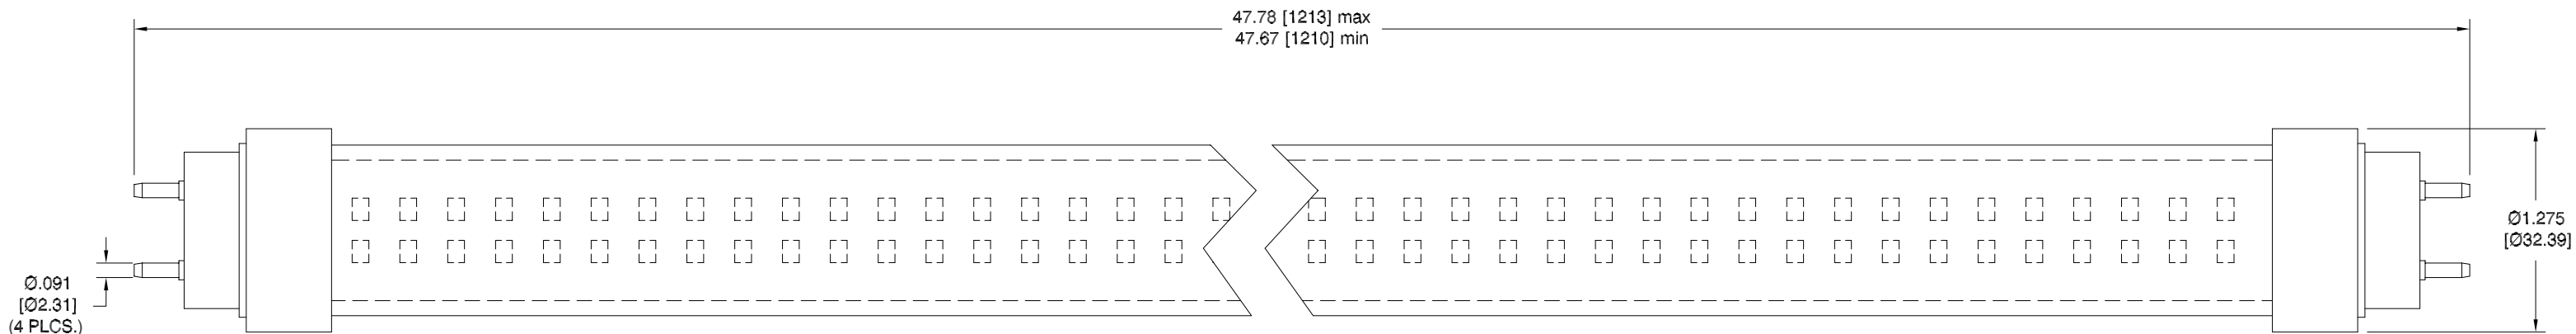

NOTES:

1. ALL DIMS ARE IN INCHES [MILLIMETERS].
2. LENS: FROSTED
3. WEIGHT: 1.54 lb [699 g]

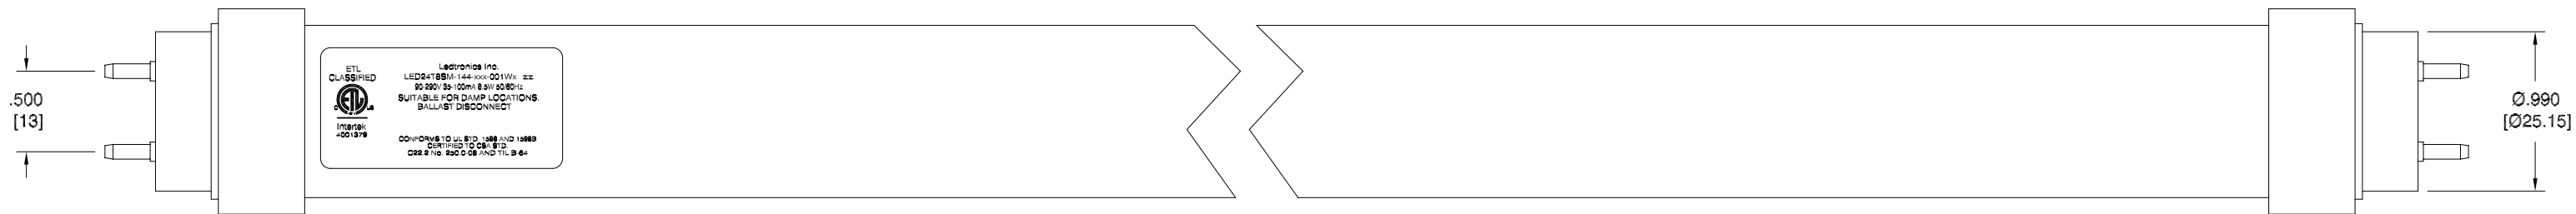

Intertek
4001379

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input checked="" type="checkbox"/>	UL/ETL
<input checked="" type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER _____

ELECTRO-OPTICAL CHARACTERISTICS

LED48T8SM-276-XIW-001WF	WARM WHITE	90-290VAC	0.157 A	17-19	63	1093 lm	344 cd	.99	79	2750K-3250K	110° X 135°
LED48T8SM-276-XPW-001WF	PURE WHITE	90-290VAC	0.157 A	17-19	69	1289 lm	400 cd	.99	75	5000K-5600K	105° X 130°
LED48T8SM-276-XWW-001WF	NATURAL WHITE	90-290VAC	0.157 A	17-19	65	1212 lm	376 cd	.99	74	3800K-4300K	110° X 135°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE	CURRENT (A)	ENERGY USED (WATTS)	EFFICACY (lm/W)	TOTAL LUMENS	MAXIMUM CANDELA	POWER FACTOR	CRI	COLOR TEMP. (K)	VIEWING ANGLE

ELECTRICAL CHARACTERISTICS

LED[®]
LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE					
LED48T8SM-276-XXW-001WF					
DWG NO	SCALE	SHEET	DATE		
CMMS0532	1:1	1 OF 1	09-29-10		
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	GP		RD	LD	BJ
	09-29-10		01-10-13	01-10-13	01-10-13