


# LFB2H2G45CC1D005



## Appearance & Shape



(1)(3) : GND  
(2) : OUT  
(4) : IN

A : Directional Input Mark

All the technical data and information contained herein are subject to change without prior notice. (in mm)

## Features

Ultra-small, low-profiled, lightweight chip filters based on ceramic multilayer technology.  
Extremely ultra-small band-pass filters.

1. Ultra-small, low-profiled, lightweight band-pass filters.
2. Absolutely no adjustment required.
3. Reflow solderable.
4. Available in tape and reel packagings for automatic mounting.
5. Available in the 2400MHz to 2500MHz frequency range.

## Packaging Information

Packaging	Specifications	Minimum Order Quantity
-	180mm Embossed Tape	3000

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# LFB2H2G45CC1D005



## Specifications

Applications	WLAN BT	Power Capacity	500mW
Nominal Center Frequency(fo)	2450.00MHz	Operating Temperature Range	-40°C to 85°C
Bandwidth(BW)	fo±50.00MHz	L x W (size)	2.50x2.00mm
Insertion Loss in BW I)	1.60dB max. (at 25°C)	Thickness(max.)	1.0mm
Insertion Loss in BW II)	1.90dB max. (-40 to +85°C)		
Attenuation(Absolute Value) I)	45.0dB min. at DC to 1785.00MHz		
Attenuation(Absolute Value) II)	40.0dB min. at 1805.00 to 1990.00MHz		
Attenuation(Absolute Value) III)	30.0dB min. at 1990.00 to 2025.00MHz		
Attenuation(Absolute Value) IV)	25.0dB min. at 2110.00 to 2170.00MHz		
Attenuation(Absolute Value) V)	5.0dB min. at 2750.00 to 3000.00MHz		
Attenuation(Absolute Value) VI)	15.0dB min. at 3000.00 to 4800.00MHz		
Attenuation(Absolute Value) VII)	30.0dB min. at 4800.00 to 5850.00MHz		
Attenuation(Absolute Value) VIII)	30.0dB min. at 7200.00 to 7500.00MHz		
VSWR(max.)	1.92		
Characteristic Impedance(Nom.)	50Ω		

### Attention


1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# LFB2H2G45CC1D005

## Product Data

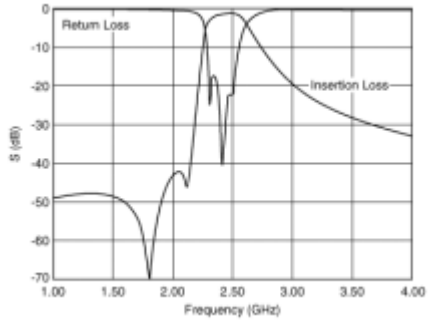

Frequency Characteristics

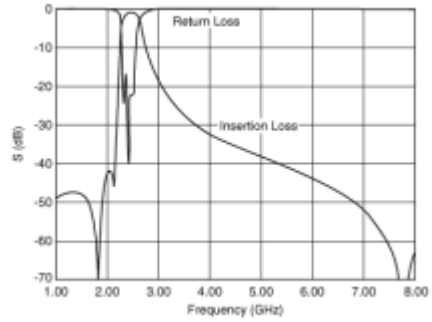

Spurious Response

**Attention**

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.