

SPECIFICATIONS

Mechanical

Insertion Force: 59N max.
Withdrawal Force: 12N min.
Durability: 500 Cycles.


Electrical

Voltage Rating: 250V.
Current Rating: 1.5A for power pin and 0.5A for signal pin.
Contact Resistance: 30 mΩ max. Δ10 mΩ max. after stress
Dielectric Withstanding Voltage: 500V AC.
Insulation Resistance: 1000MΩ min.


Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color.
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -40°C to +85°C

PCI-e SAS Connector
LU Series
R/A ,SMT
Plug
1.27mm [.050"] Pitch for 22
Pos & 0.80mm [.0315"] for
46 Pos.

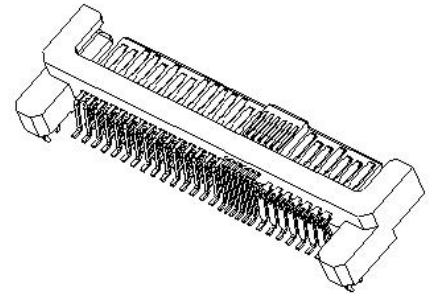

DRAWING

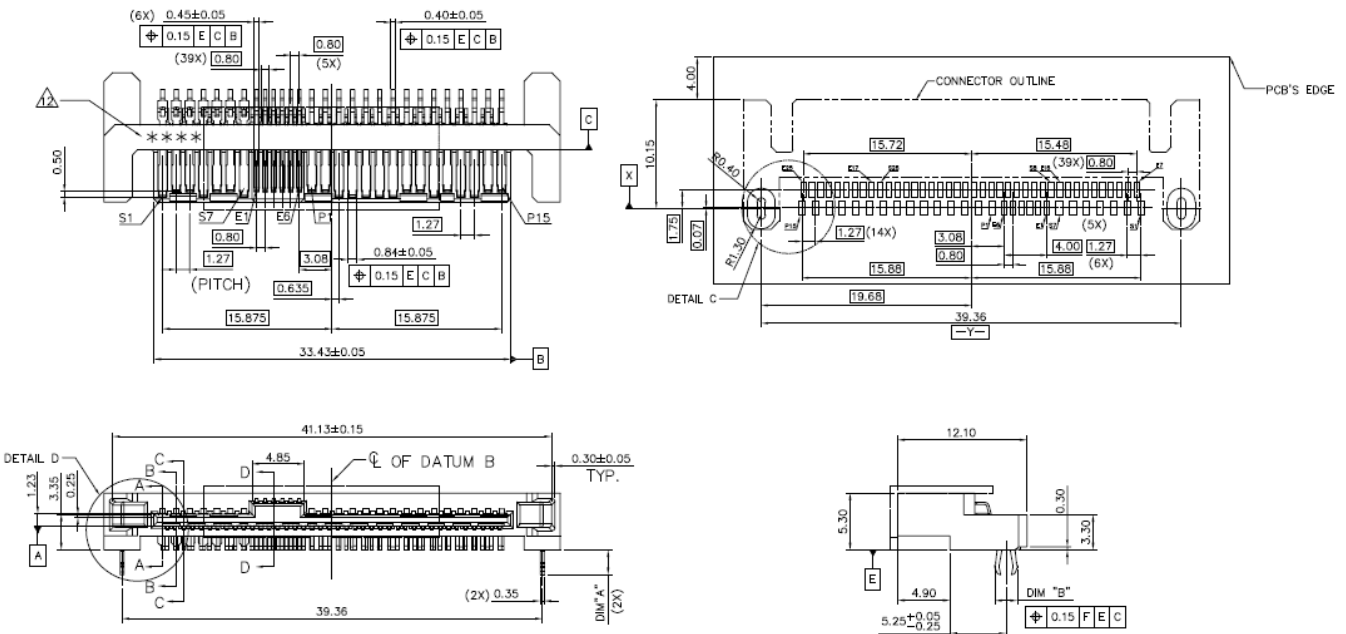

ORDERING INFORMATION

