

PRODUCTS

Chilisin provides inductor turnkey solutions for Power, EMI and RF and global technical team to support its customers. Chilisin has become one of the few inductor suppliers capable of providing a complete "one-stop shopping" experience.




Products Line

- Power Inductors & Chokes
- EMI Suppression Filters
- RF and General Inductors

Product Search





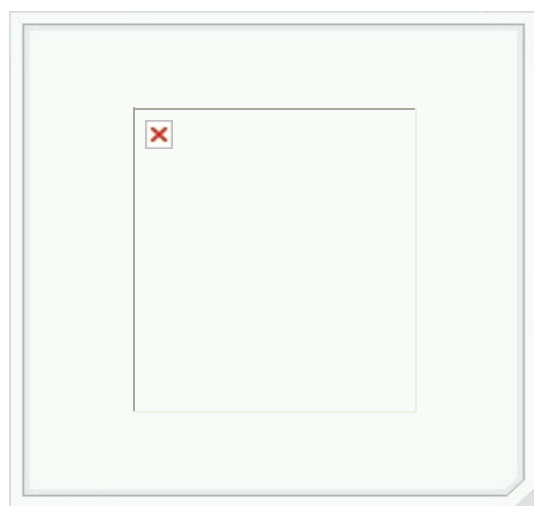



▶ Products

Home > Products >



Part Number : LVS505040-220?-N

Structure	Closed Magnetic Circuit Type - Automatic Assembly
Inductance(?H)	22
Tolerance(±%)	20,30
Test Frequency	100kHz,1V
RDC(ohm)	0.135
RDC Tolerance(±%)	30
Isat(A)Typ	1.80
Isat(A)Max	1.62
Irms(A)Typ	1.40
Irms(A)Max	1.26
Operating Temperature	- 5 5 °C ~ 1 2 5 °C(Including self - temperature rise)
L(mm)	5.0±0.2
W(mm)	5.0±0.2
T(mm)	3.7~4.2

P/N	LVS505040-220M-N
Part Numbering	
Dimensions	
Reflow Profile	
Packing	  
Recommended Pattern	
Electrical Characteristics Curve	 

Note: Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without advance notice. Please contact our sales department before ordering.

[Back](#)

- About Chilisin**
- Media Center
 - Corporate Overview
 - Corporate Milestones
 - Core Technology-Mini Choke
 - Certificates & Awards
 - Quality and Social Responsibility
 - Announcement
 - Video
 - Site Map

- Investor Relations**
- News
 - Financial Information
 - Corporate Shareholders Area
 - Corporate Governance
- Tel: +886-3-5992646
Fax: +886-3-5999176
Address: No.29, Lane 301, Tehhsin Rd., Hosin, Hukou, Hsinchu 303, Taiwan (R.O.C.)
-
- sales@chilisin.com.tw

- Careers**
- Join Chilisin
 - Work life in Chilisin
 - Learning Career Development
 - Welfare System