


8	DESCRIPTION
7	REV.
6	
5	
4	
3	
2	
1	



- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate: IP68, IP69K.
 - * Connector: PU+GF, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Zinc Alloy, Nickel Plated.
 - * Outer Mold: PU, Black.
 - * Cable: (B) UL20549, PUR Jacket, Black. (D) UL2517, PVC Jacket, Black.
 - * Rated Voltage: 4Pin 250V dc. or ac.
 - * Rated Current: 4Pin 4A
 - * Cable Length Tolerance: 0.5±20mm
01±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT: mm		TITLE	M12 D-Code Double Ended		Amphenol LTW		ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	SCALE	1:2	SIZE A4	SHEET 1 OF 2	安費諾亮泰企業股份有限公司	DRG NO	CHECKED BY	DATE
		REV.	A	MC-REV. A.5	\varnothing : Inspection item		CUSTOMER	APPROVED BY	DATE
						ALTW		Max	2018-12-11
									2018-12-11
									2018-12-11

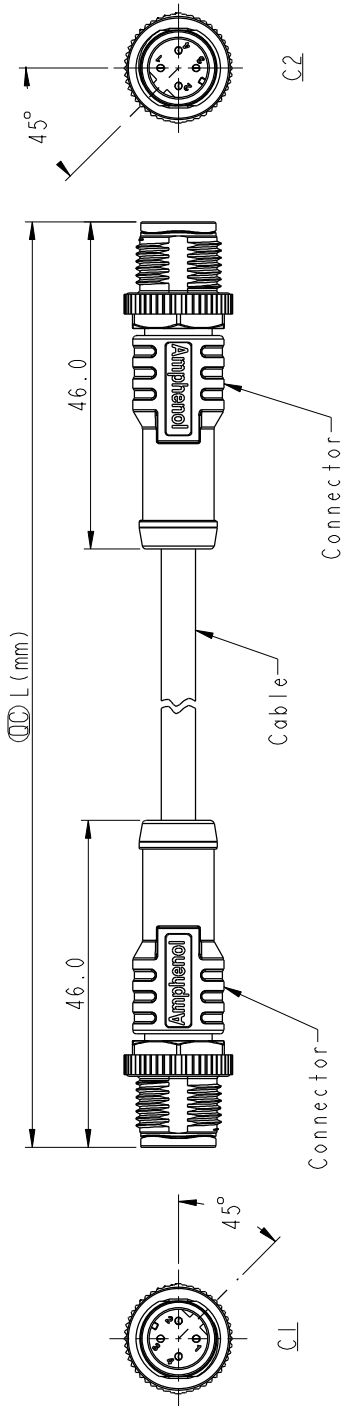